




THIS CLOCK STANDS 6FT HIGH AND KEEPS PERFECT TIME





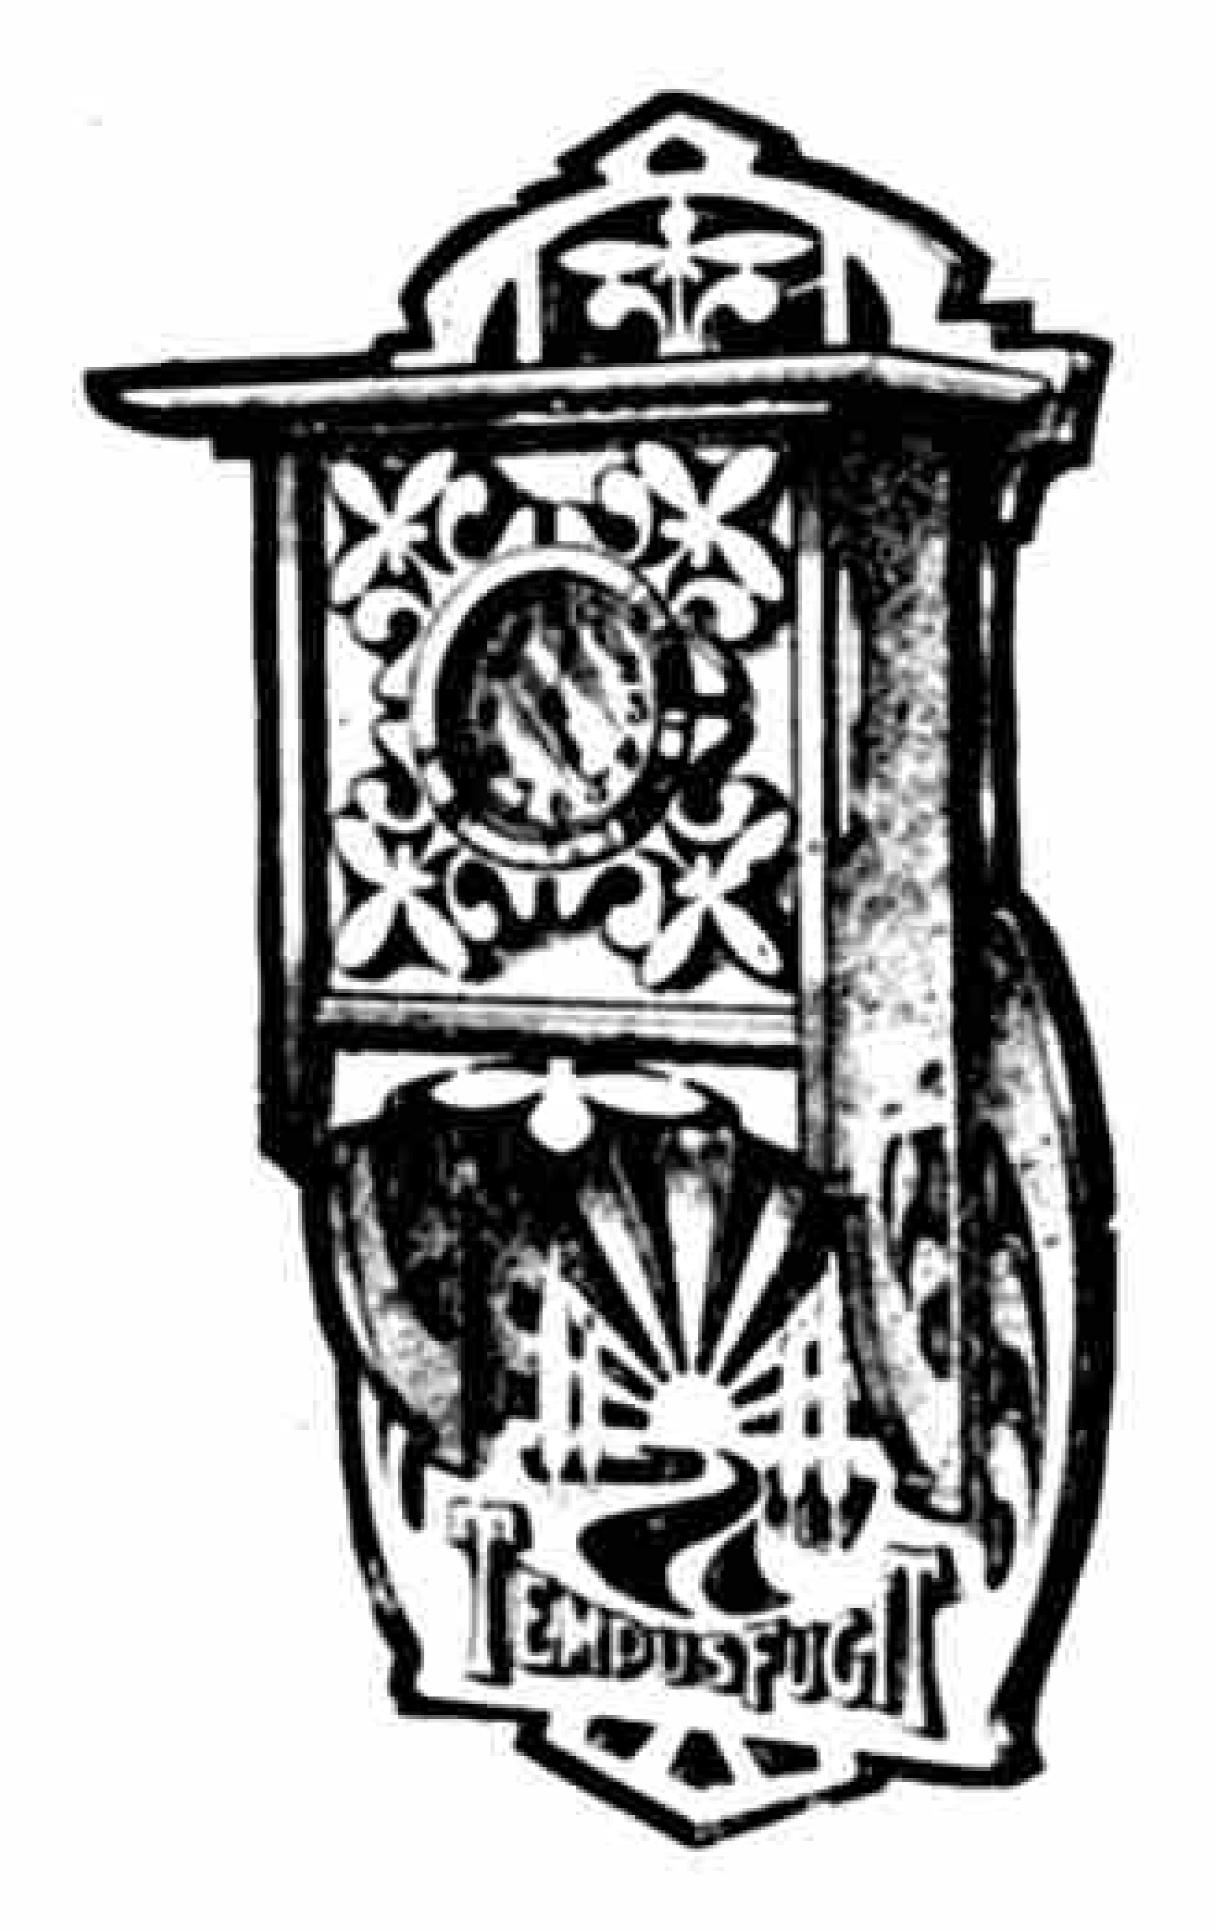

FRETWORK ARTICLES YOU CAN MAKE

Fretwork Outfit. Toys, models, boxes, clocks, cabinets, and heaps of other things to use or play with. You can make your own Christmas presents, or even sell your fretwork to make pocket money! It is simple and delightful—you can do it in about two evenings. Get father to bring an Outfit so you can start now. All the necessary tools are supplied with each set.

Outfits for	all	Purses

No.	14	Outfit		4-4-4	4	(Post Free	4	6
	2		***		5	6		6	-
**	24	,,	+ (+ :+)	0.604040	6	6		7	
	7				8	/ <u>@</u>		8	9
**	3		2511.25	5/0.5	~		,,,	10	3
**	32	7.7	Y		45	,•		12	š
	44	**	10.00	3	12			17	9
	5	**		255000	13	6	***	14	3
The	A1		7:7:78		16	6	7.7	17	6
	A3			77.7	32	6	•••	33	6
	A4			The same	23			24	6
• •	A6	1.00			27	40.0		28	
**	~~	**	6300	6.3.87		•	***	_	

Free Designs Every Week

with Hobbies—the Fretworker's Journal. Also heaps of other interesting things you will enjoy reading about. Ask your newsagent to save you one every Wednesday, price 2d. We will send you a specimen copy if you like.

Further particulars and lists upon application to

HOBBIES LIMITED (Dept. 96b) DEREHAM, NORFOLK

65, New Oxford St., London, W.C.; 147, Bishopsgate, London, E.C.; 79, Walworth Road, London, S.E.; 326, Argyle Street, Glasgow; 10a, Piccadilly, Manchester; 9a, High Street, Birmingham; 15, County Arcade, Leeds; 11, Bridge Street, Southampton; 68, London Road, Brighton and agents in every town.



FREE THIS CATALOGUE

A fine China Cabinet Design, worth 1/6. Instructive illustrations of 15 pastimes and 500 fretwork articles, 200 pages, and latest prices.

9d. or Post Free 1


BRITISH
M A D E.

Look

EVERY

Look for the Mark



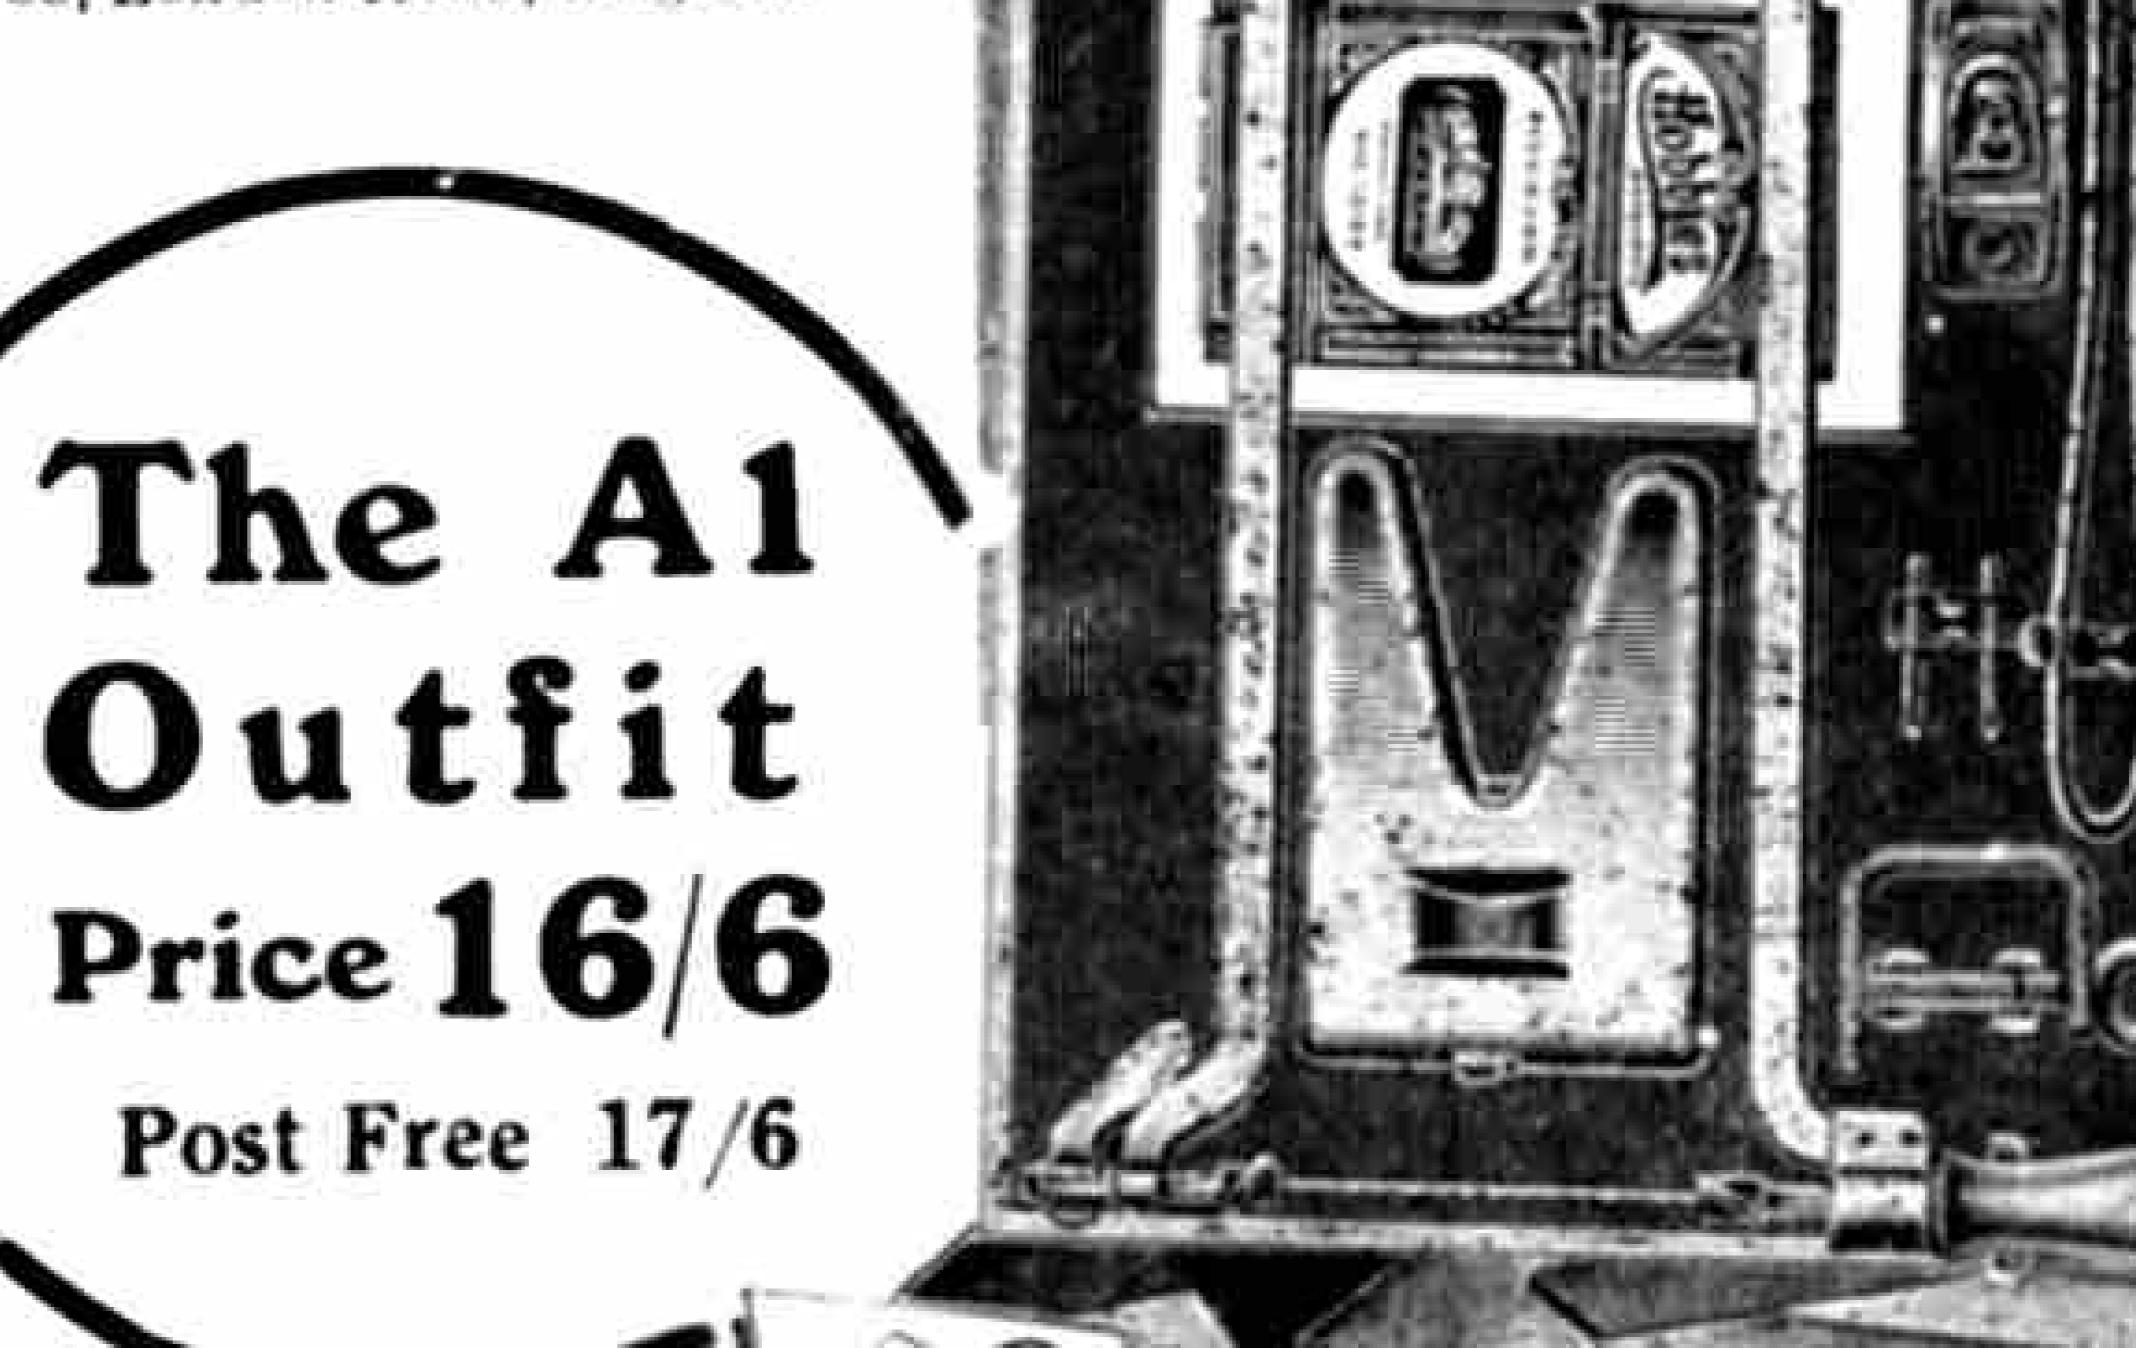

EDITORIAL OFFICE Binns Road. LIVERPOOL



PUBLISHED IN THE INTERESTS OF BOYS

on the

15th of each month



T is a pleasure for me to acknowledge letters from hundreds of enthusiastic readers, with congratulations on the increased number of pages, and the

improved appearance The of the recent issues of the "M.M." Some Growing · M.M. time ago I mentioned that it was my intention

to make this the brightest and best paper for boys, and now scores of boys tell me that I have done that already. This does not mean that we have arrived at the end. however, for the "M.M." will continue to improve with every issue.

For our future issues I have a number of good things and several surprises in store. At the moment I am not able to

disclose the preparations that are being Increase made for your interest in the forthcoming num-Price bers. For many months past there have been two insistent demands from our readers. One has been that we add more literary pages and increase the price to 2d., and the other that we publish fortnightly, or even weekly! After careful consideration I have decided to adopt the former course—the latter demand will be further considered later. The increased price will come into operation next month, with a special large Xmas

The "M.M." is considerably heavier than it was in the old days, when we had only 12 pages, and the postage is now

Increased Subscription Rates

number.

ld. It will therefore, be necessary to increase the subscription rates for Magazines mailed from Liverpool to 1/6

for six months or 3/- for twelve months. From the date of this notice the subscription for copies to be mailed direct will be at the above-mentioned rates, but we shall keep faith with our existing subscribers and execute all orders on our books at the old rates until the subscriptions expire. This remark does not apply to the Xmas number, for which each subscriber will be debited 3d. The 'M.M.' is now included in Messrs. W. II. Smith


EDITORIAL Motor Cars to Run on Railways

Hartford Railway has recently introduced a new type of vehicle, consisting of a kind of motor bus that runs on railway lines. The cars seat 35 passengers, carry 2,000 lbs. of luggage and travel at a speed of 45 miles per hour. A driver and a conductor constitute the crew.

The mechanical construction, which is practically the same as that of a motor

HE New York, New Haven, and car in use on roads, includes petrol-engine. clutch, gear-box, propeller shaft and bevel-gear rear-end drive. No differential is necessary, however, and reverse is obtained by a separate set of levers and gears, the cars having four speeds forward and four speeds reverse. They are worked much more severely than a road car, however, because their engines must operate at high speed, hour after hour

(Continued on page 168)

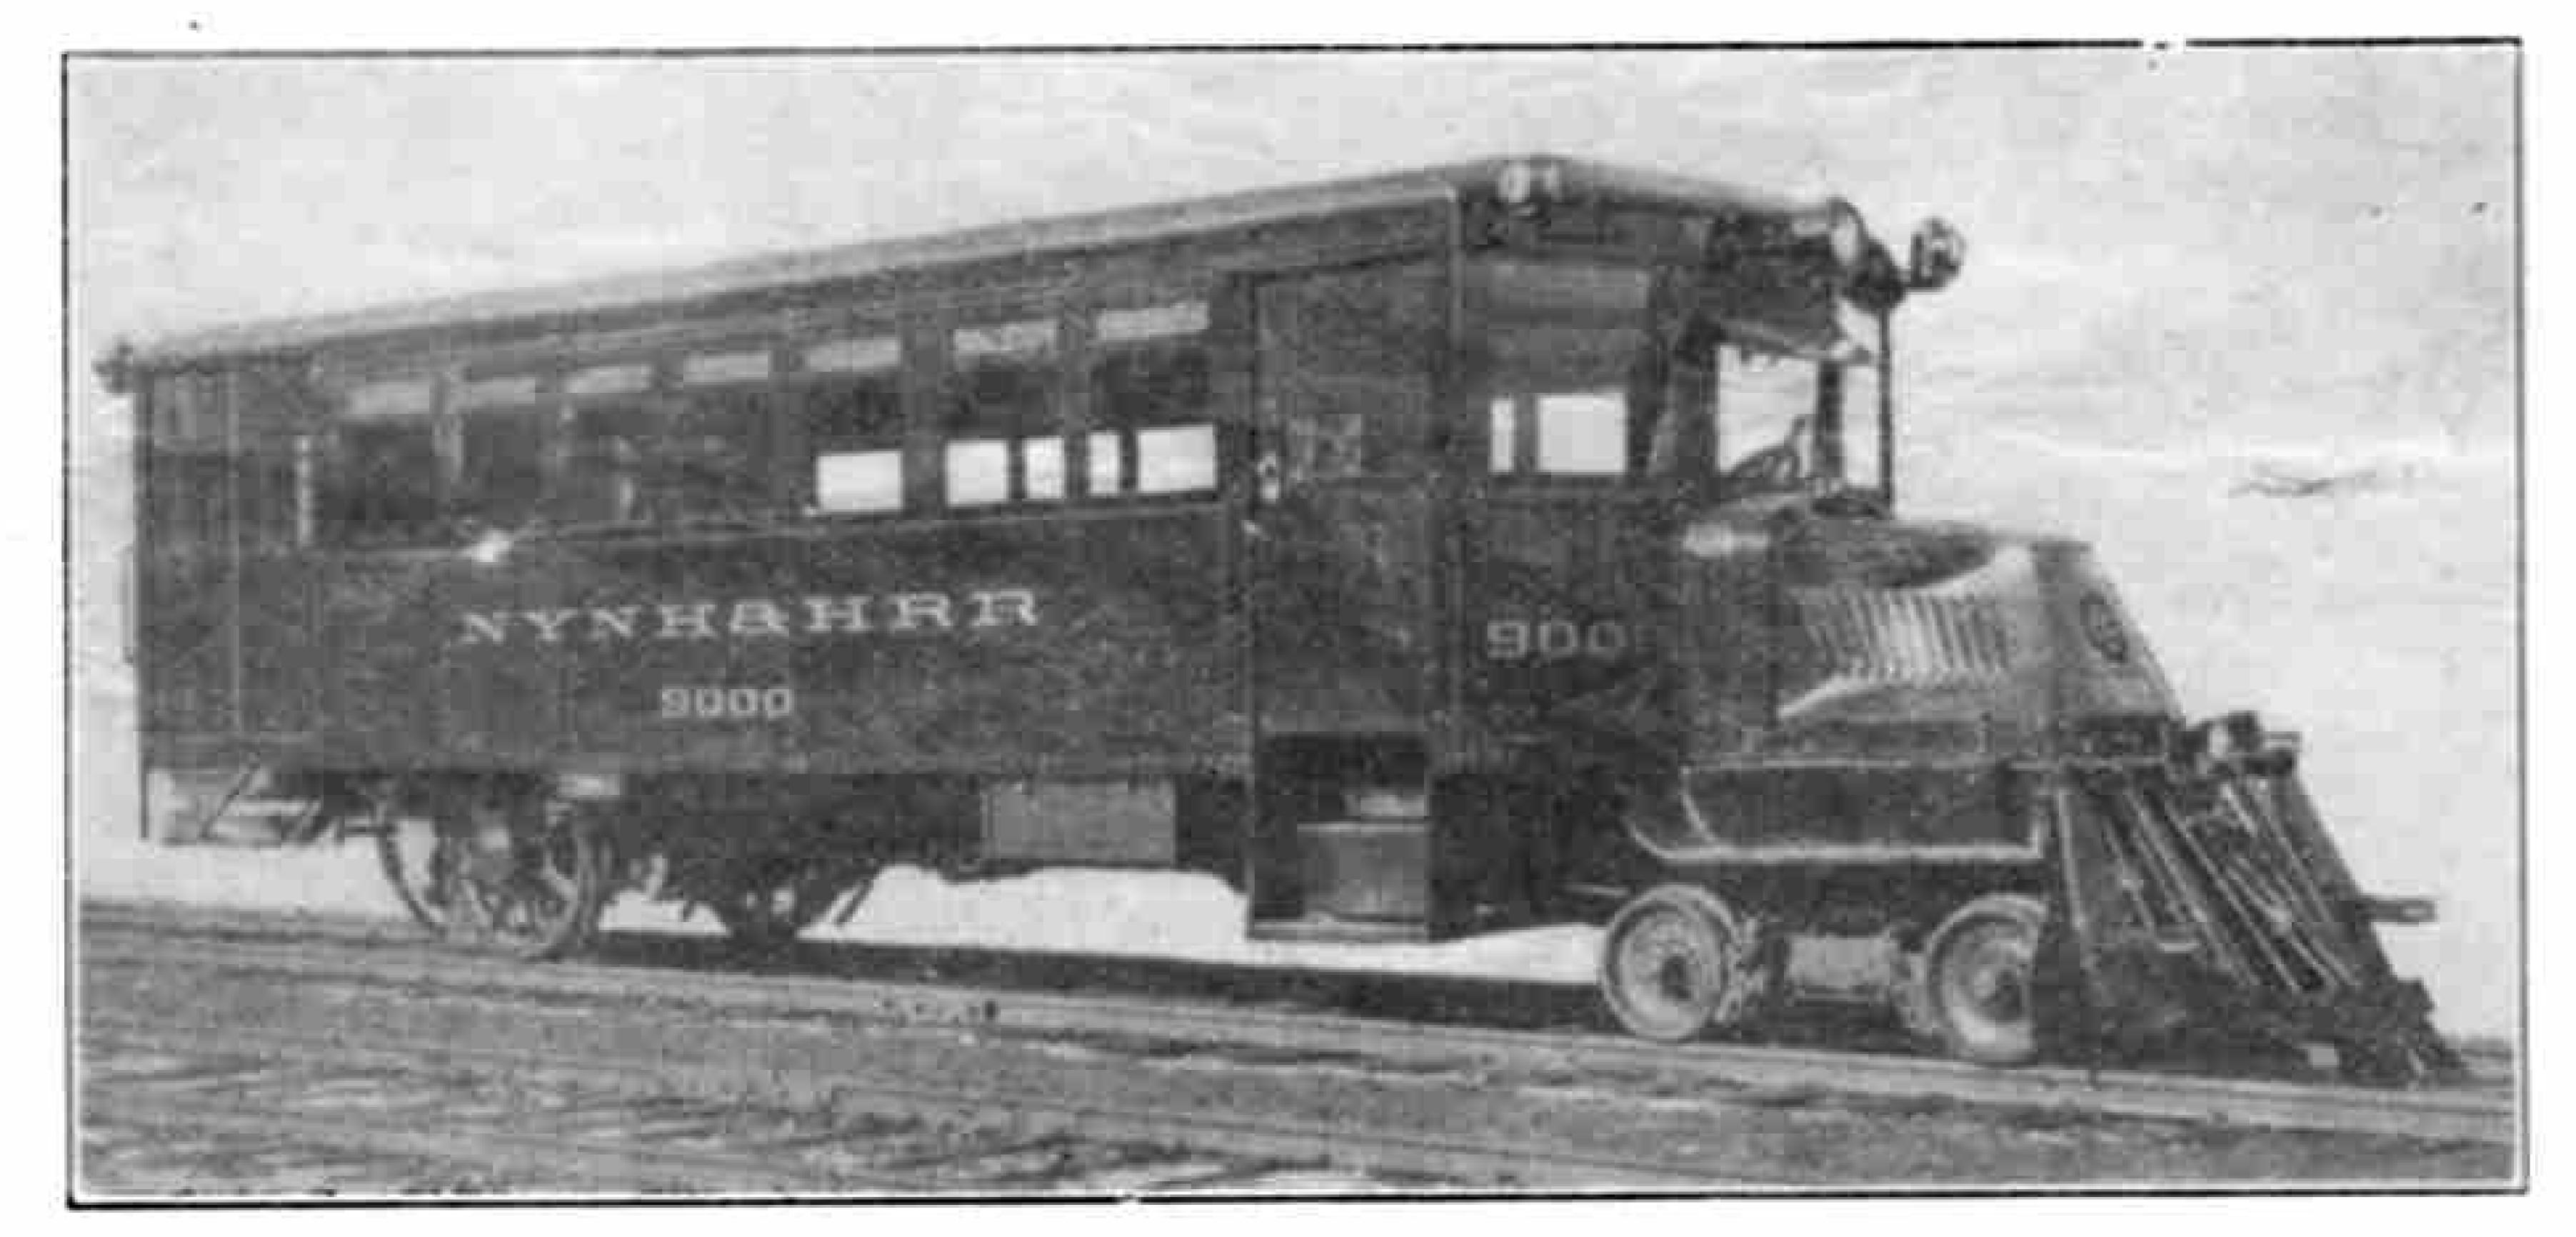

The New Railway Motor 'Bus

& Son's wholesale list and is thus available to newsagents. It may be ordered from all regular Meccano dealers and also from any newsagent or bookstall, price 2d. Should any reader have difficulty in obtaining the "M.M." from his Meccano dealer or newsagent, he should write to me, giving full particulars.

And now just a word in connection with the special Christmas number that is being prepared. This will appeal to all my readers, both at Special home and abroad, and will have more pages Xmas. than the 'M.M.' has Number ever had before. It will contain a host of good things. There will be articles on Meccano Model Building. Radio, Stamps, Books, Presents to Buy. and some new features including a Puzzle and Joke Column that will appeal very strongly to Guild Members. New Competitions will be announced, and there will be a special splendid article on a proposed new structure that, when completed, will be one of the world's largest bridges. Be sure that you order your copy of the December "M.M." in good time.

In this issue I am announcing a new competition, the subject of which is "Drawing the Editor." During the past

twelve months I have received thousands of Dorequests from all over vou the world for copies Sketch ? my photograph.

Some of my readers imagine me with a long grey beard, and others have guessed that I have red hair! Many readers have asked whether the little sketch at the head of this column shows me as I really am. To tell the truth, I am not able to answer this conundrum, for I have never seen myself! My friends tell me that the sketch is not at all like me, and that I am not nearly so good-looking as the young gentleman depicted there! It has occurred to me that it would be rather interesting to ask those who enter our first drawing competition to send sketches of the Editor as they imagine him to be. I expect we shall have some very humorous entries, and I am looking forward with interest to seeing the efforts of those of my readers who are fond of sketching! Of course, the winning sketches will be printed in the "M.M."! Full particulars on page 161. 141

THE

MECCANO CLOCK

Full Instructions for Building this Interesting Model

WE have pleasure in publishing the first instalment of the instructions for building a "grandfather's clock" with Meccano. This clock stands well over 6 ft. in height and keeps perfect time. With the exception of the 17 lb. weight, the wire by which it hangs, the cardboard-face and the light spring (80 Fig. B). the model is made entirely of Meccano. The clock keeps perfect time, and is the outcome of experiments conducted over the last twelve months in the Meccano model-building department. A large number of these clocks have been constructed, and have been tested out very thoroughly. With careful adjustment every clock has been made to keep perfect time. The construction of the clock is not difficult, and we hope that many of our readers will set to work and build this interesting and instructive model right away!

Constructing the Frame

Begin by making the frame to carry the gear trains. This frame (shown in Fig. A) consists of vertical 121 angle girders (1), connected by 51" angle girders (2) and 51" strips (3). Bolt three $51'' \times 21''$ flat plates (4) strips (5) above and below, and two 21" × 21" flat plates (6) to the plates (4) but on the other sides of the lower strips (5) and overlapped two holes with the larger plates (4). bolted Cranks (7) trunnions (8) on the top of the frame form the pivotal bearings for the pendulum. A 12" strip vertically to one of the trunnions and to the 51" strips (10) to form bearings for the main gear train. A double bent strip (11) bolted on the left side of the frame to form a bearing for the

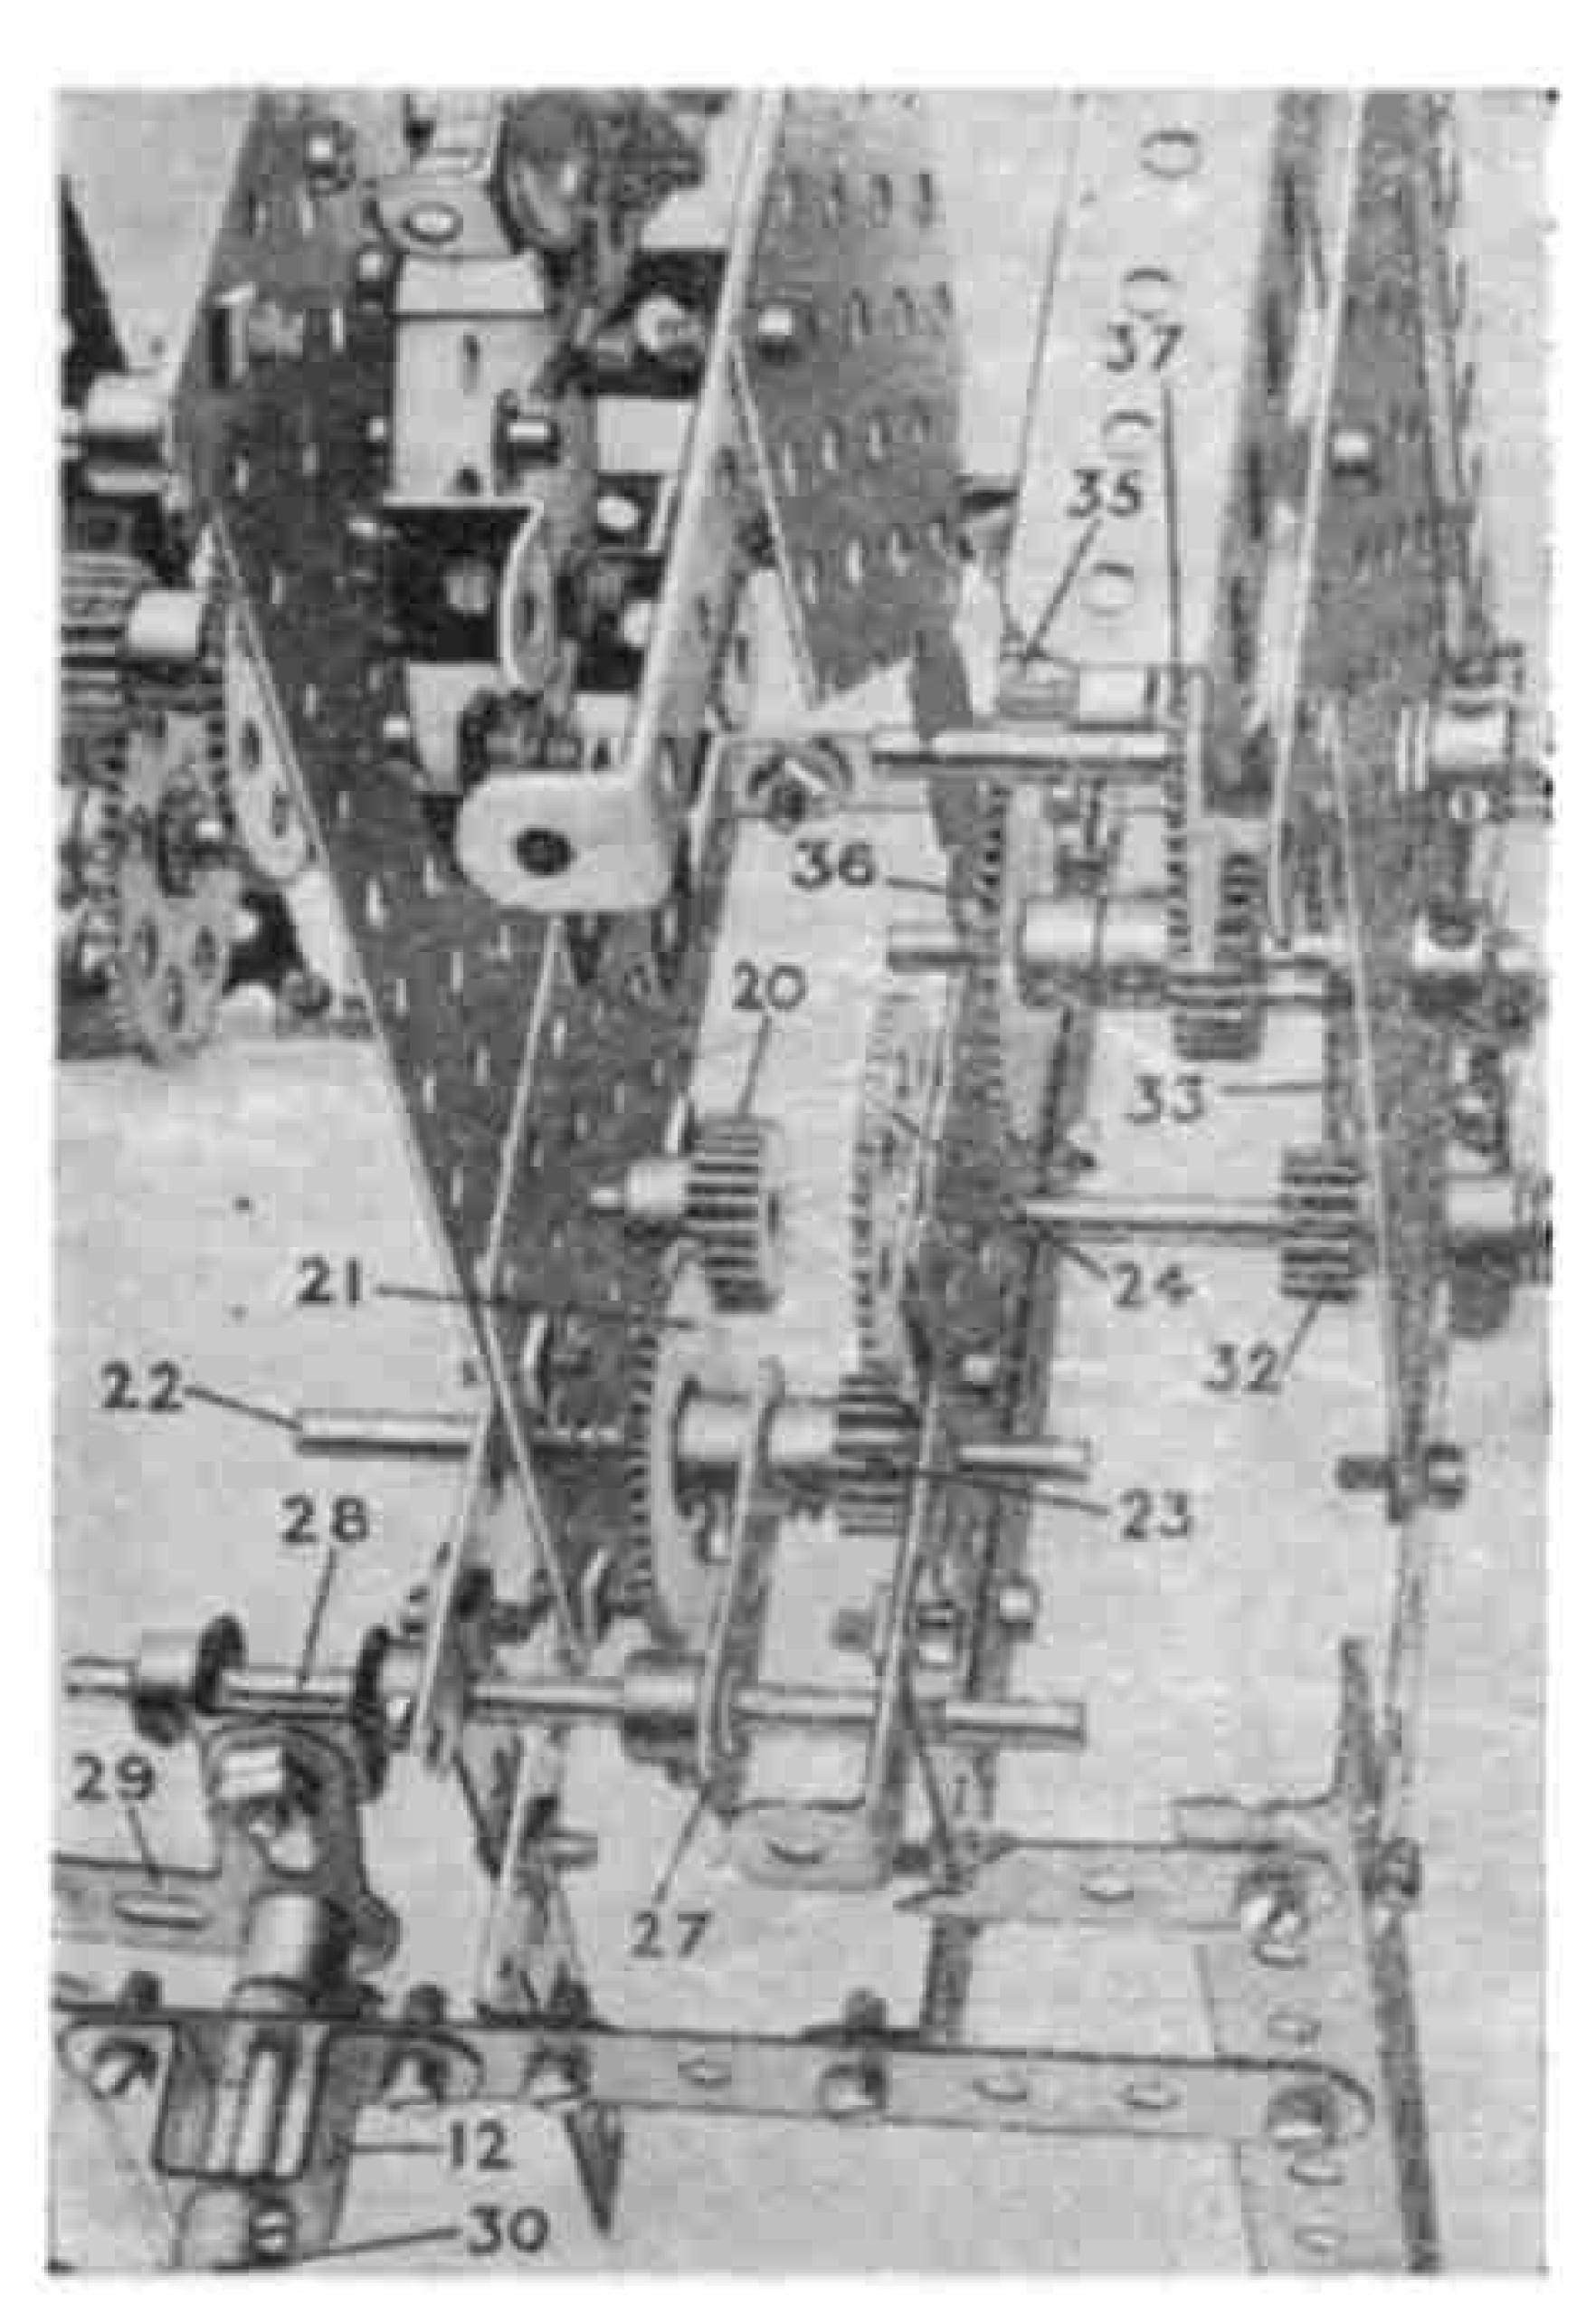


Fig. C

winding handle (65 Fig. B). A second double bent strip (12) is provided, to form a bearing for the gear that disconnects the driving train from the gearing of the hands, when the clock is being wound up.

A flat trunnion (13 Fig. A) is bolted below the left perforated plate (6) to form a bearing for the lowest 3" rod of the clock train (18 Fig. B). The position of the other perforated strips will be easily seen from Fig. A.

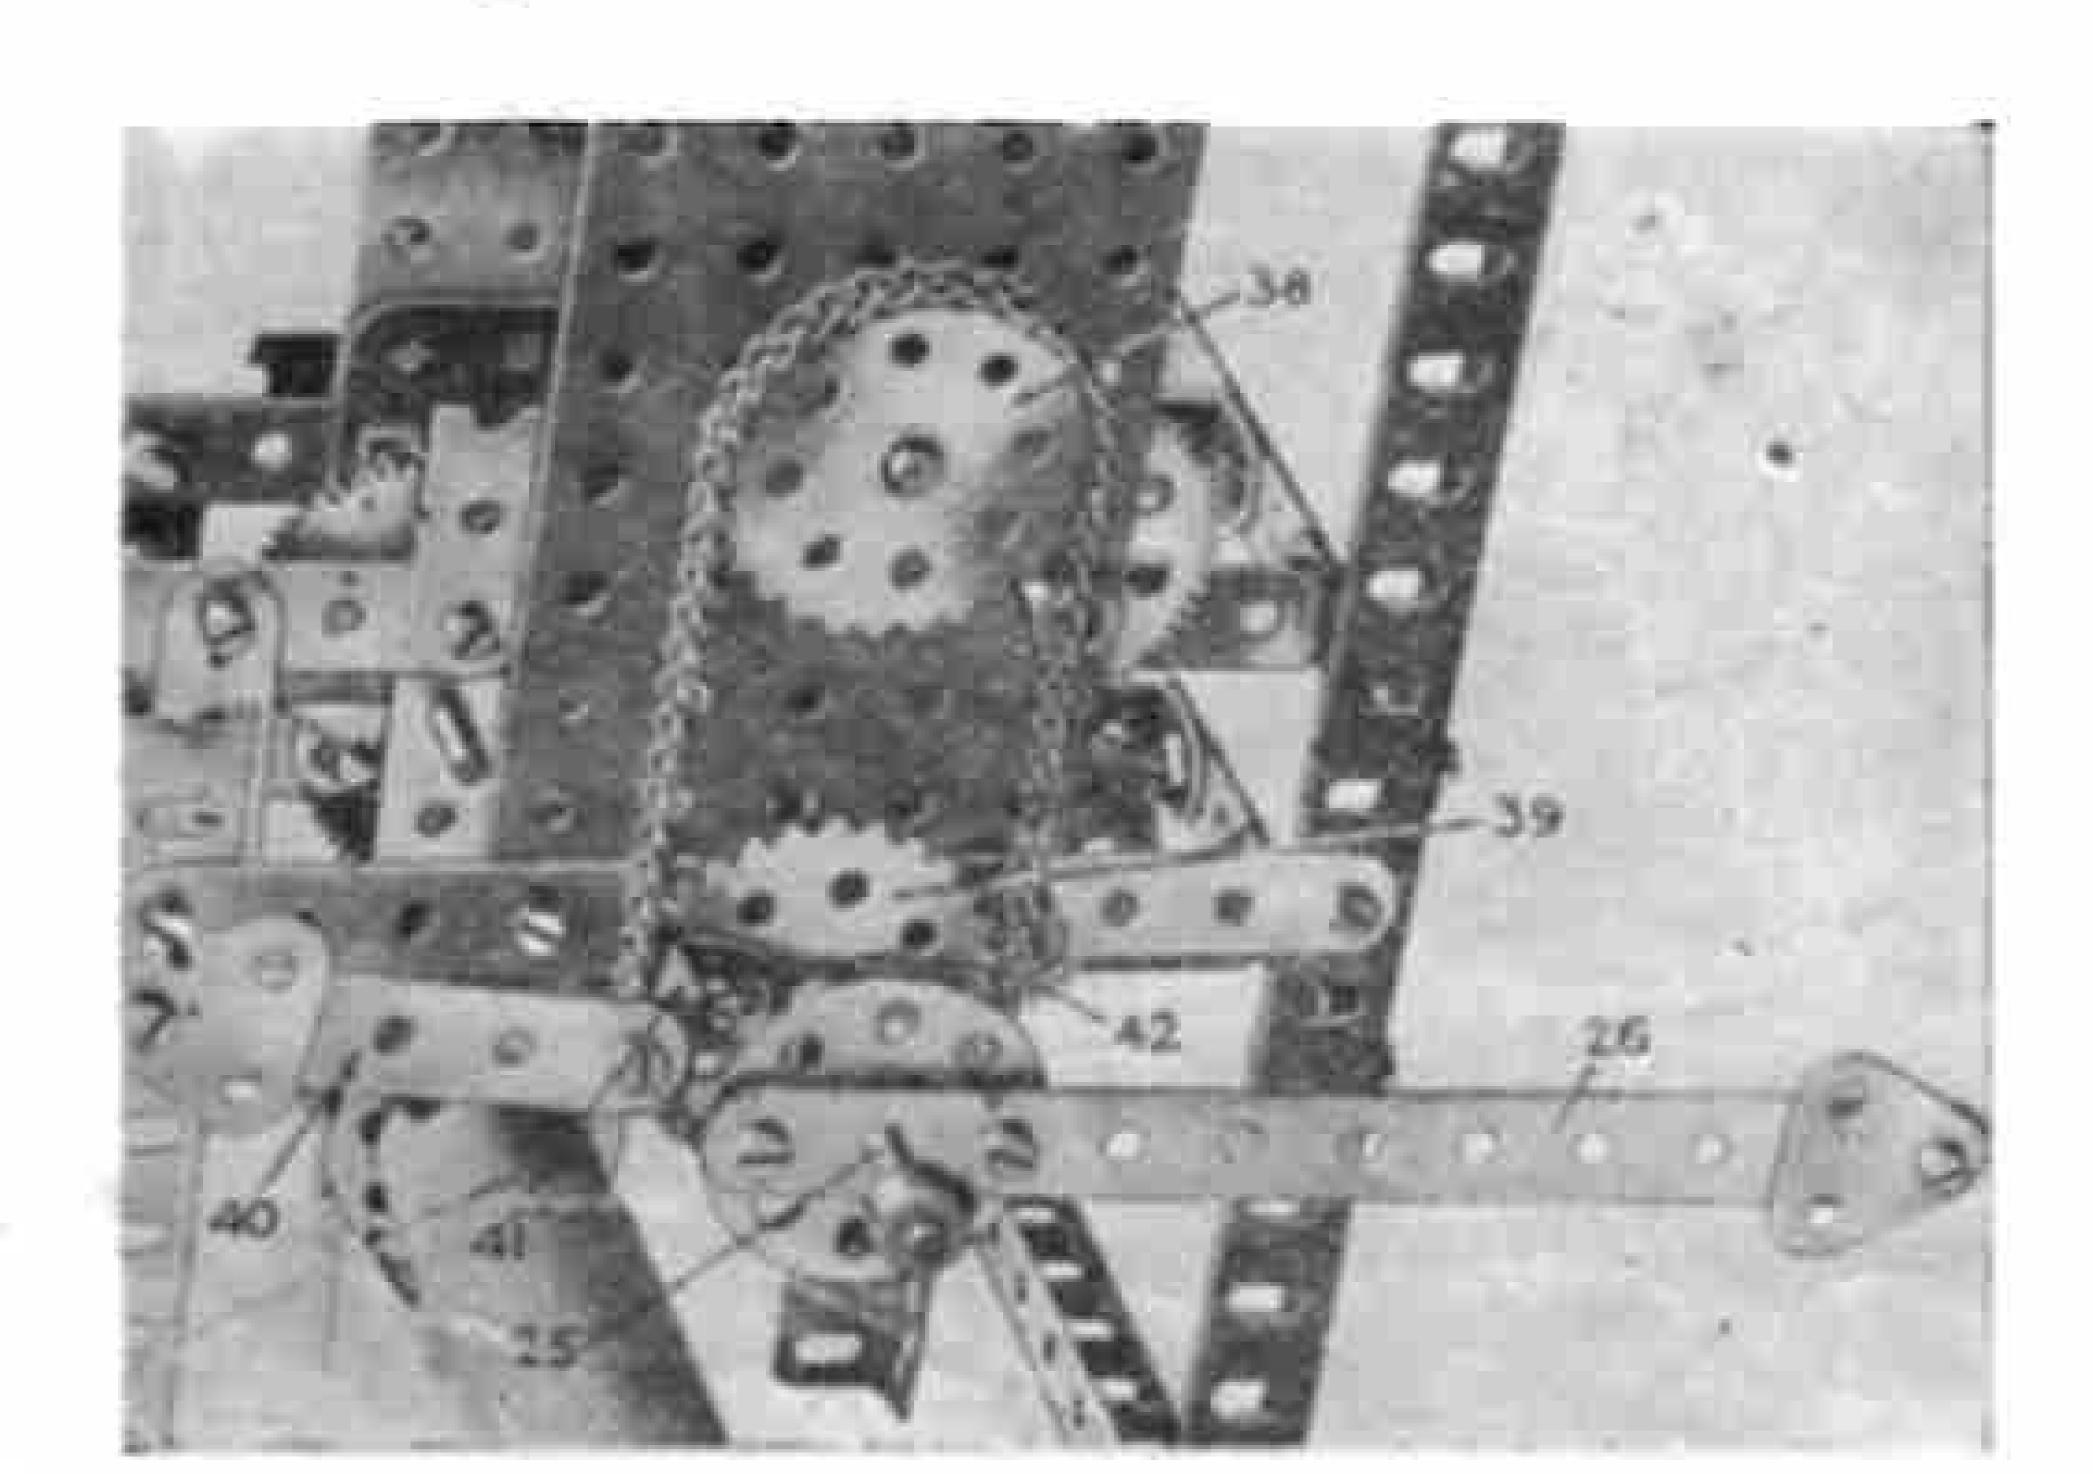


Fig. D

The Main Gear Train

When the frame has been constructed, proceed to build the main driving gear train, as shown in Fig. B. This consists of three ½" pinions (14) connected with 57-toothed gear wheels (16) and three ½" pinions (16) connected with 50-toothed gear wheels (17). These are secured on the rods 18, the top rod

being 3½" long and the remainder 3" long. They pass through holes in the left-hand plates (4 and 6) and the strip 9, collars (102) being fitted on each rod on each side of the strip 9. No collars are necessary at the other ends of the rods.

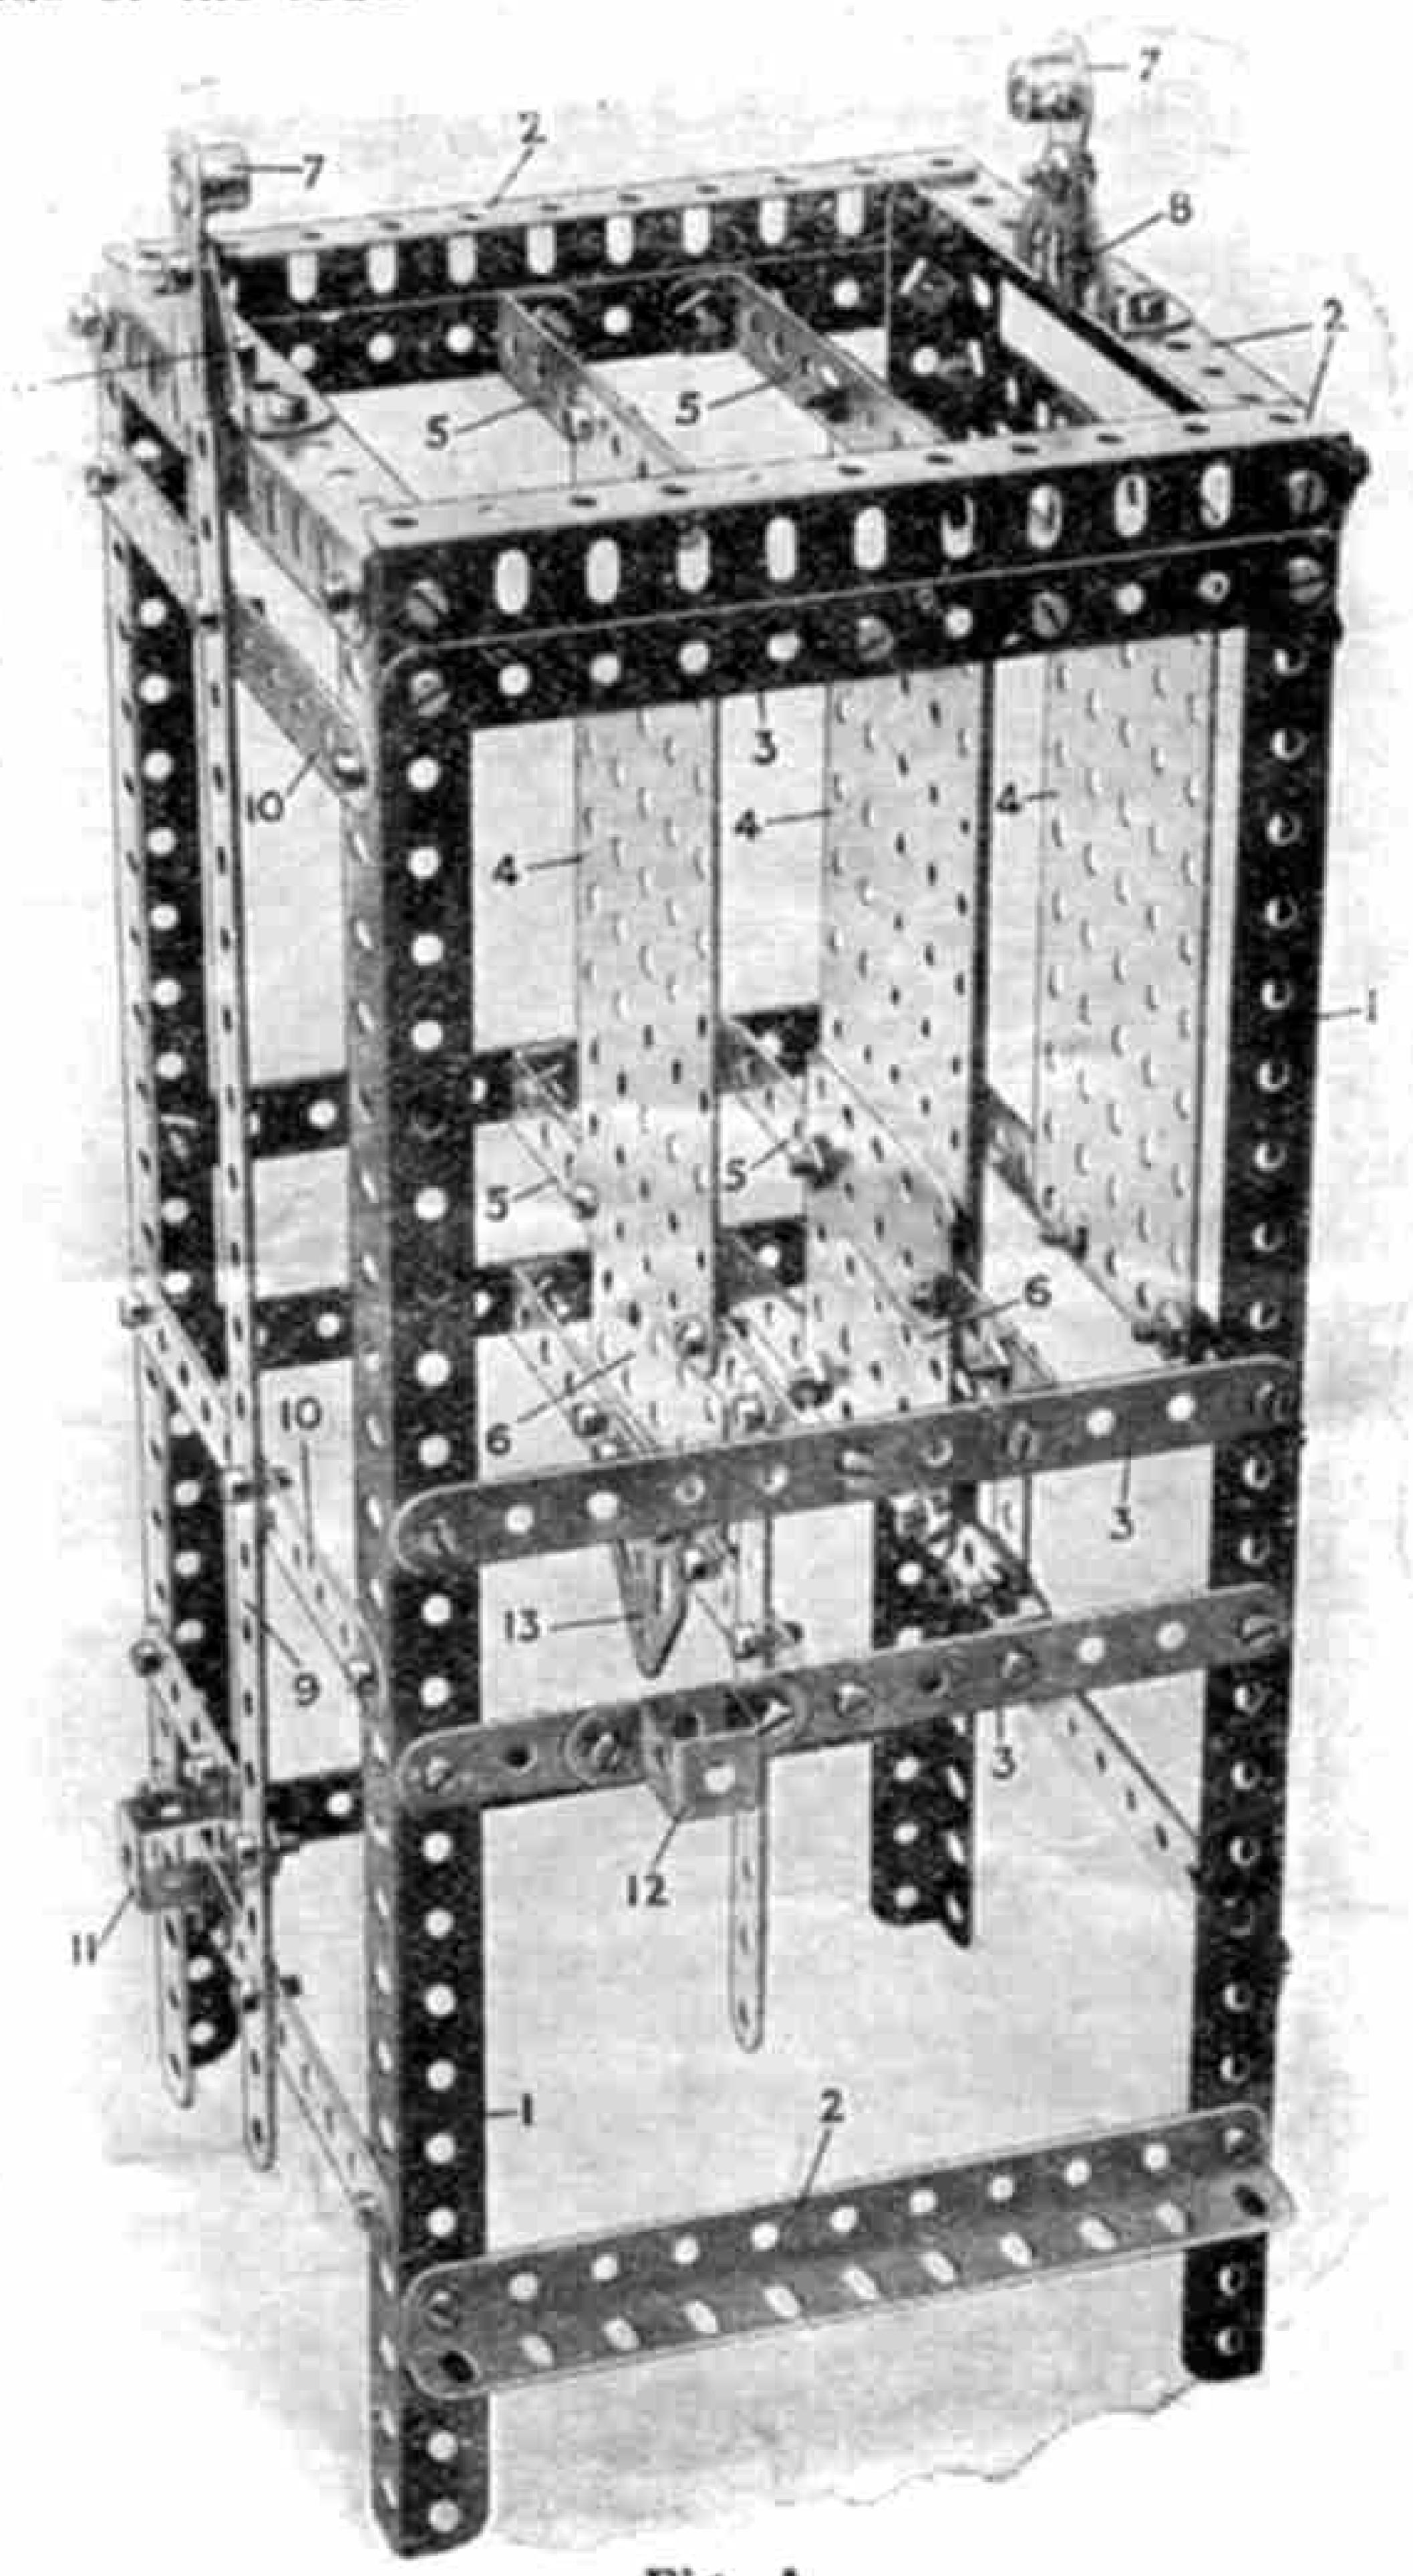


Fig. A

On the end of the $3\frac{1}{2}$ " rod (19) is a $\frac{3}{4}$ " pinion (20), which is seen more clearly in Fig. C. This pinion gears with a 50-toothed gear wheel (21) fixed on a 2" rod (22) which is able to slide in the plates (6). On this rod also is a $\frac{1}{4}$ " pinion (23) geared with a 57-toothed wheel (24) on a $4\frac{1}{2}$ " rod (25) carrying the minute hand (26 Fig. B). The web of a crank (27 Fig. C) engages the 2" rod (22), the crank being bolted to a $3\frac{1}{4}$ " rod (28) carrying

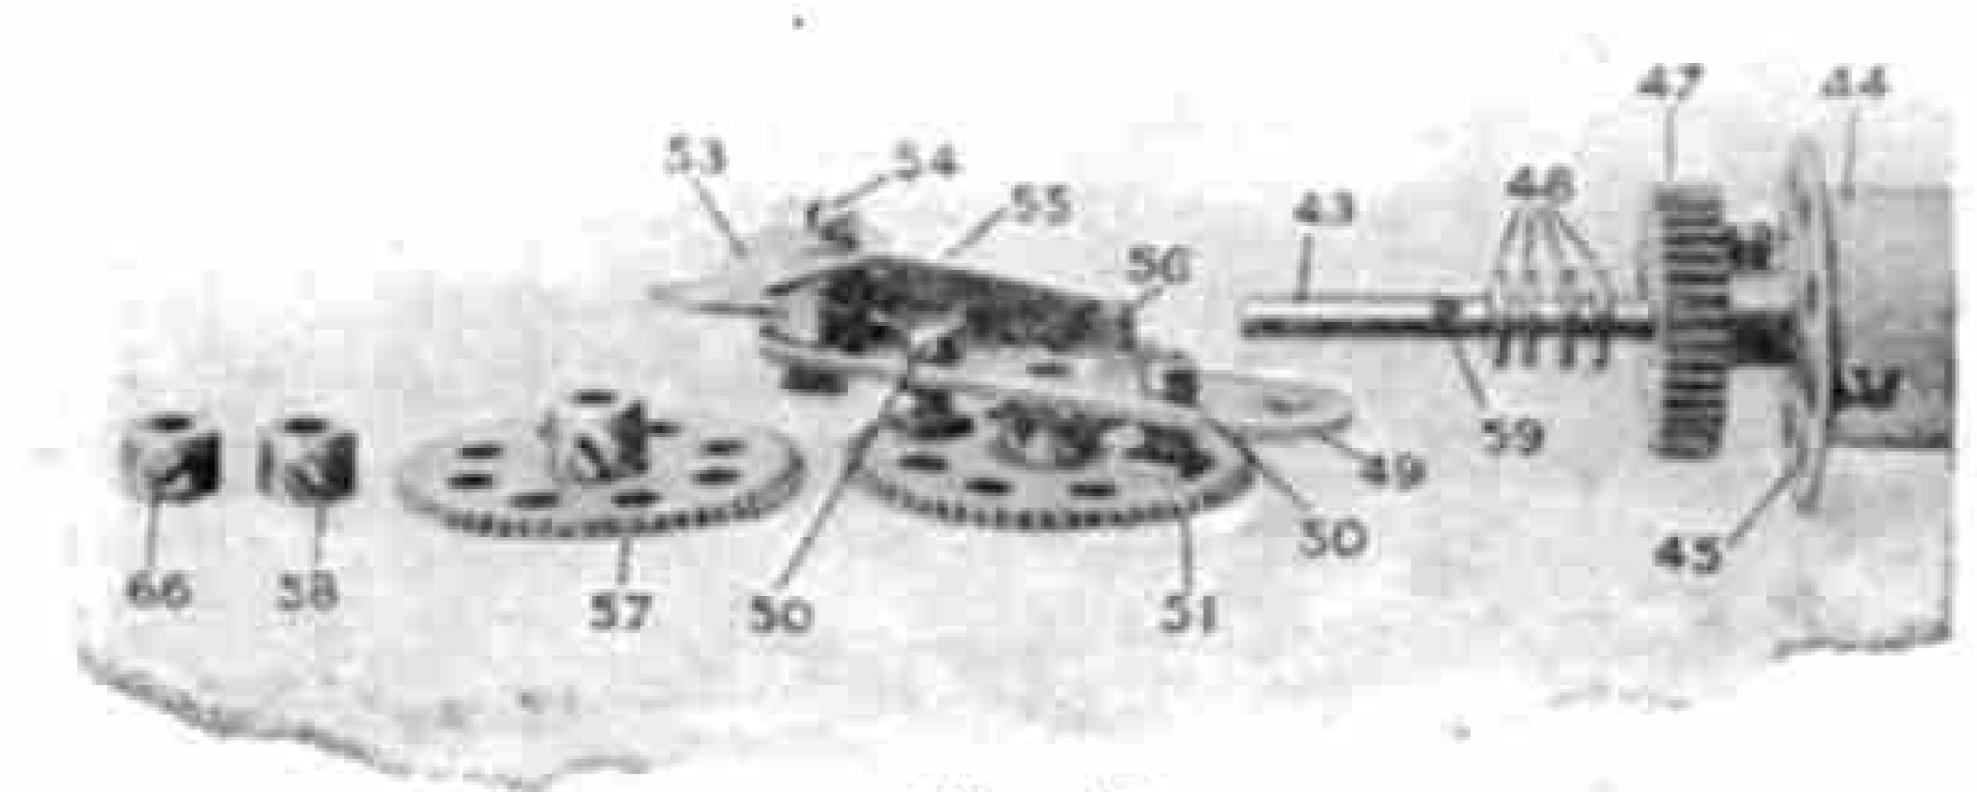


Fig. E

a double bracket bolted to a bell crank and double bent strip (12).

Adjusting the Hands

A cord (31) is connected to the bell crank (29), and by pulling on this cord, the rod (28) is caused to slide and move the gear (21) in or out of engagement with the pinion (20). This releases the driving train from the clock hands and enables the hands to be freely adjusted.

In order to drive the hour hand from the minute hand rod (25), a ½" pinion (32) on this rod drives a 57-toothed gear (33) mounted on a 2" rod. This engages a second 57-toothed gear (34 Fig. B), the 2" pinion (35) on the same 2" driving toothed gear Another #" pinion (see Fig. B) on this rod 50-toothed drives (37).gear rod of this last wheel is a 11 sprocket wheel (38 Fig. B and which is D) coupled to a similar sprocket (39) loose on the rod 25. The hour hand (40 Fig. D), con-

sists of a 21" strip and is connected by a 1" reversed angle bracket (41) to a strip (42). This is bolted to the sprocket wheel (39) and spaced by two washers to give clearance for the sprocket chain. The reversed angle bracket (41) is necessary to enable the hour hand 40 to be brought clear of the dial plate.

Ratchet Winding Mechanism

The ratchet mechanism permitting the winding of the weight is built up as shown in Figs. E, F and G. As will be seen from the two first-mentioned, the complete ratchet element is made by passing a 6" rod (43) through a wood roller (44), the ends of which are clamped between two bush wheels (45) secured on the rod. The bosses of the bush wheels are entered into the ends of the wood roller and the bolts (46) engage in the end notches of the wood roller to key the roller to the bush wheel (45).

A 1" gear wheel (47) is then bolted the rod (43) with its boss close the against end (45).wheel bush Four washers are then threaded on the rod.

The element shown the centre of Fig. next passed over the rod. This element 15 made as follows:-

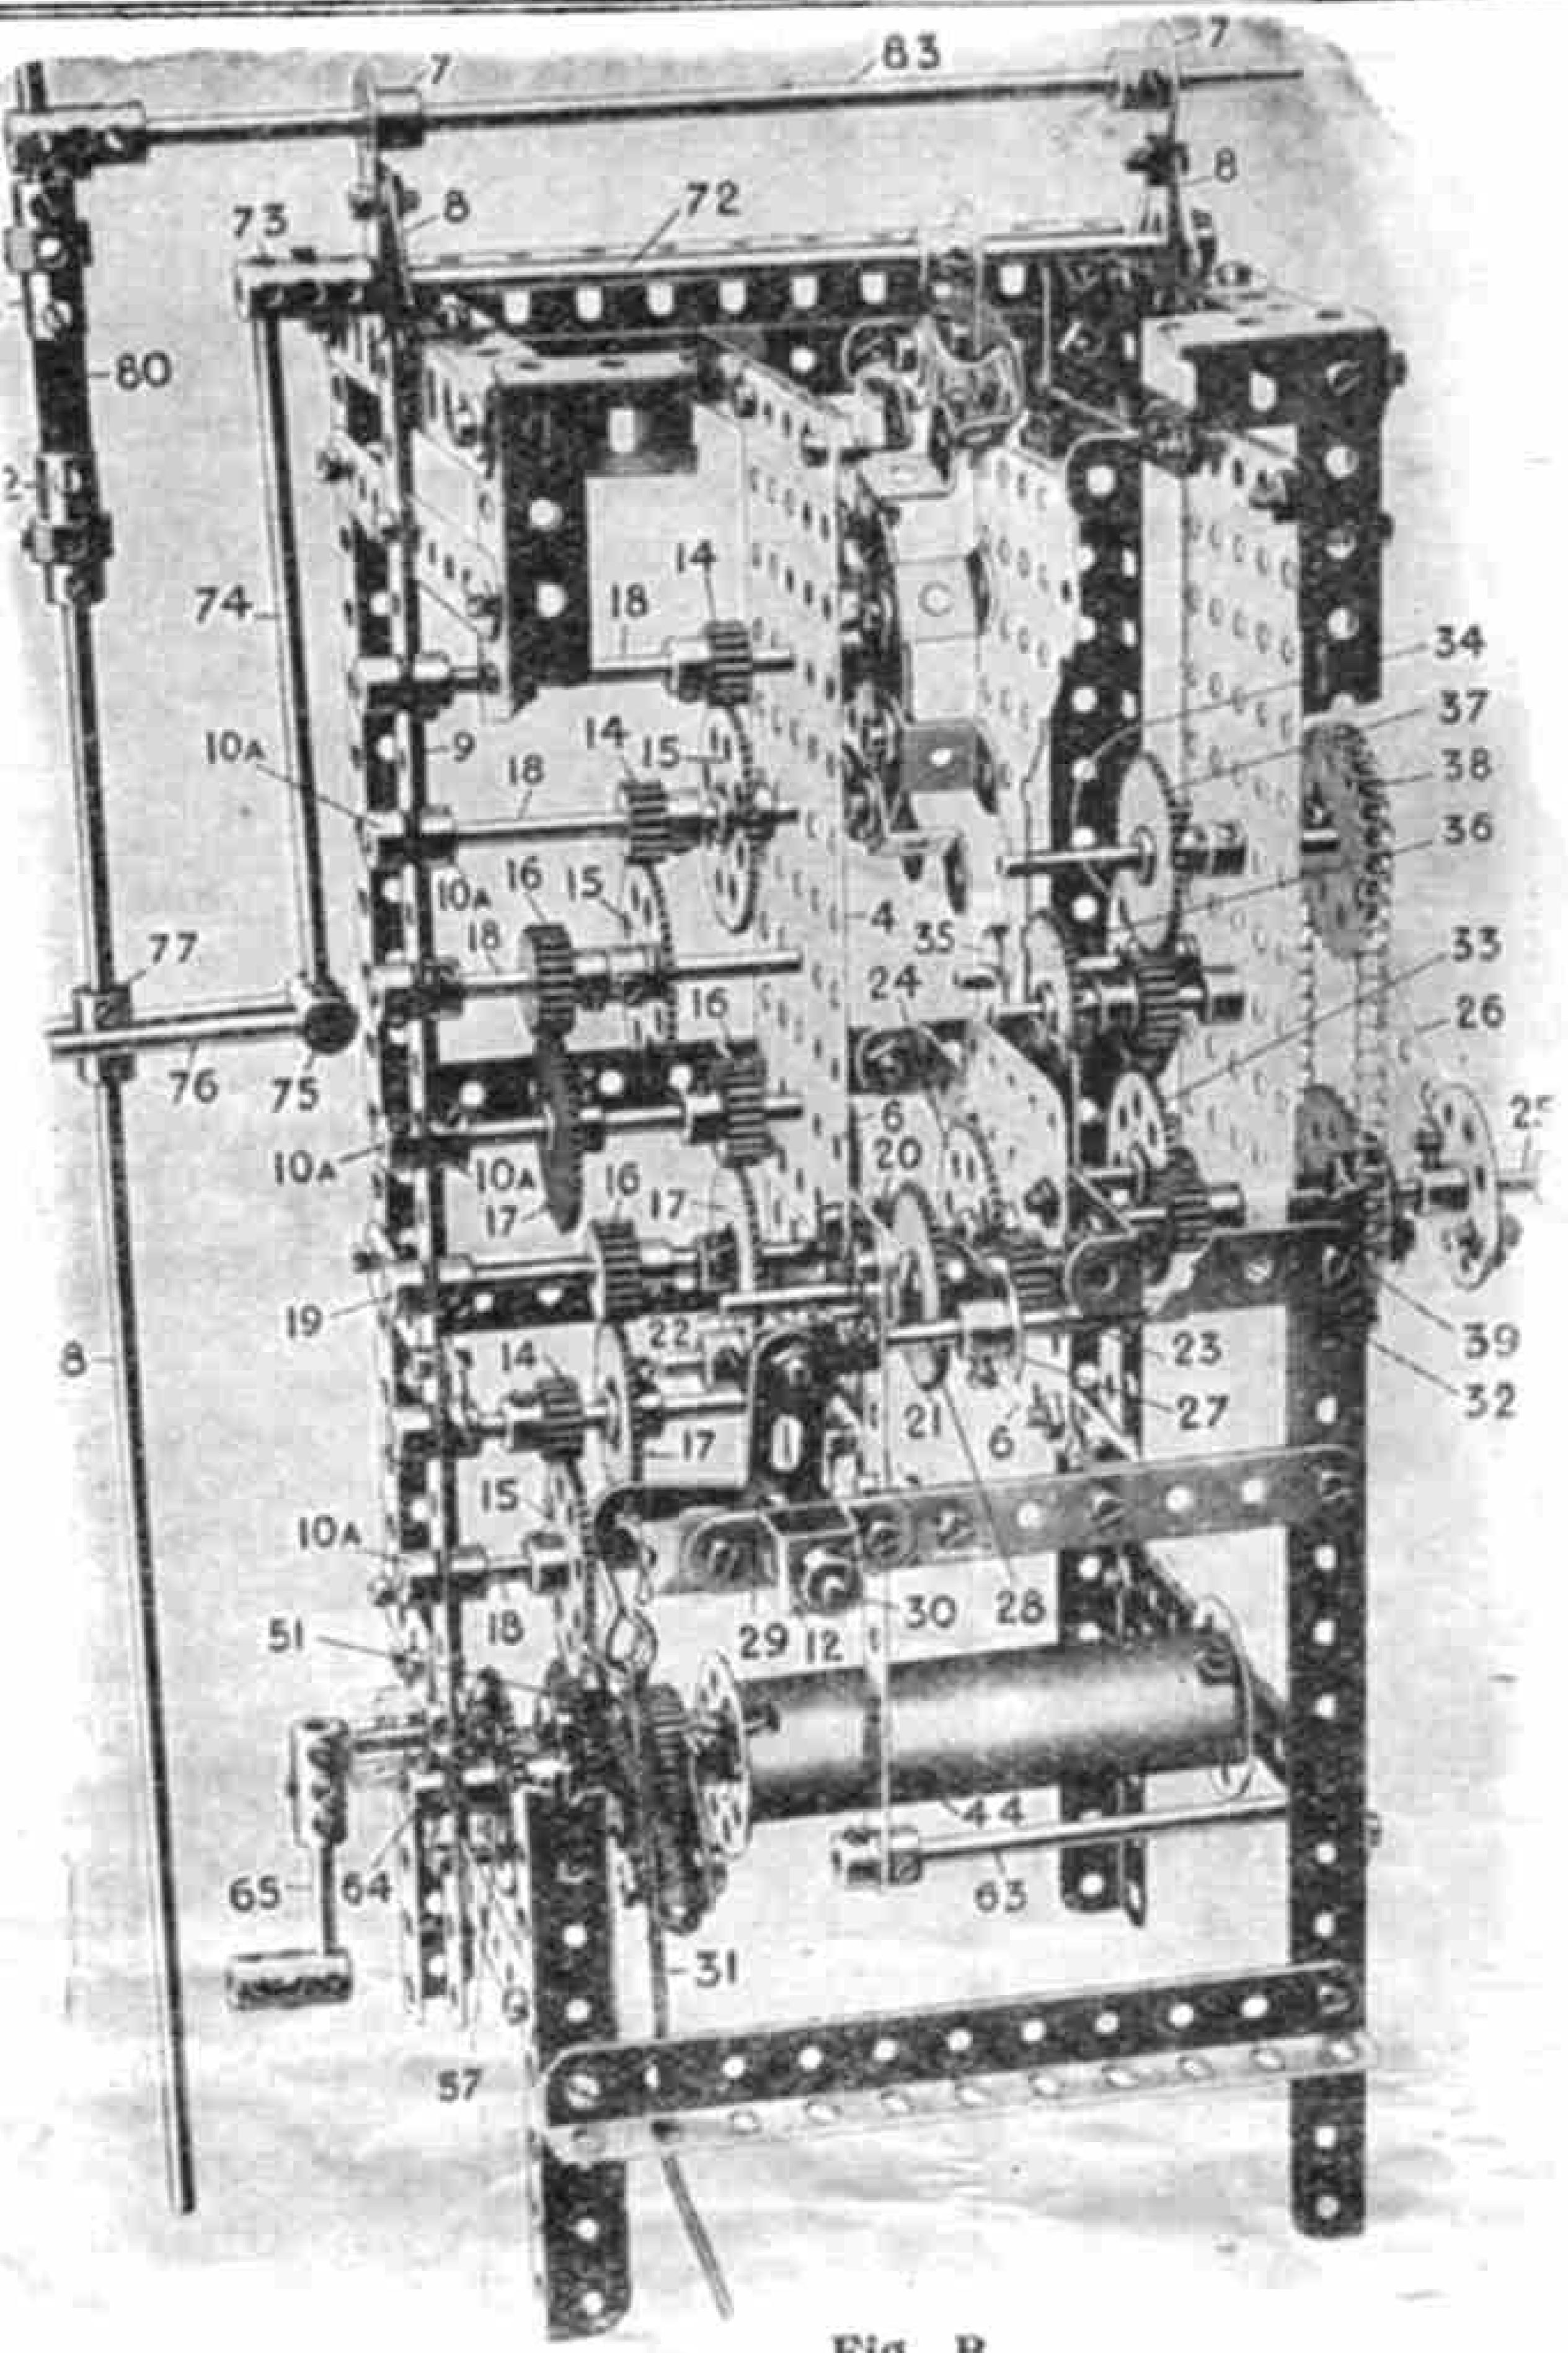


Fig. B

Two 21" strips (49) are bolted by 1" bolts (50) to a 57-toothed gear wheel (51), lock-nuts (52 Fig. F) being fitted on the bolts on each side of the gear wheel (51) and also beneath the strips (49). A pawl (53) is pivoted at (54) in the end hole of the strips (49) and a spring (55) is connected to the pawl boss by a screw, and also to a #" bolt (56) on the gear wheel (51) and lock-The element so built up is passed over the rod (43), being loose thereon, and the pawl engaged with the gear wheel (47) (see Fig. F).

(To be continued)

We shall print the Final Instalment of this article on the Meccano Clock.

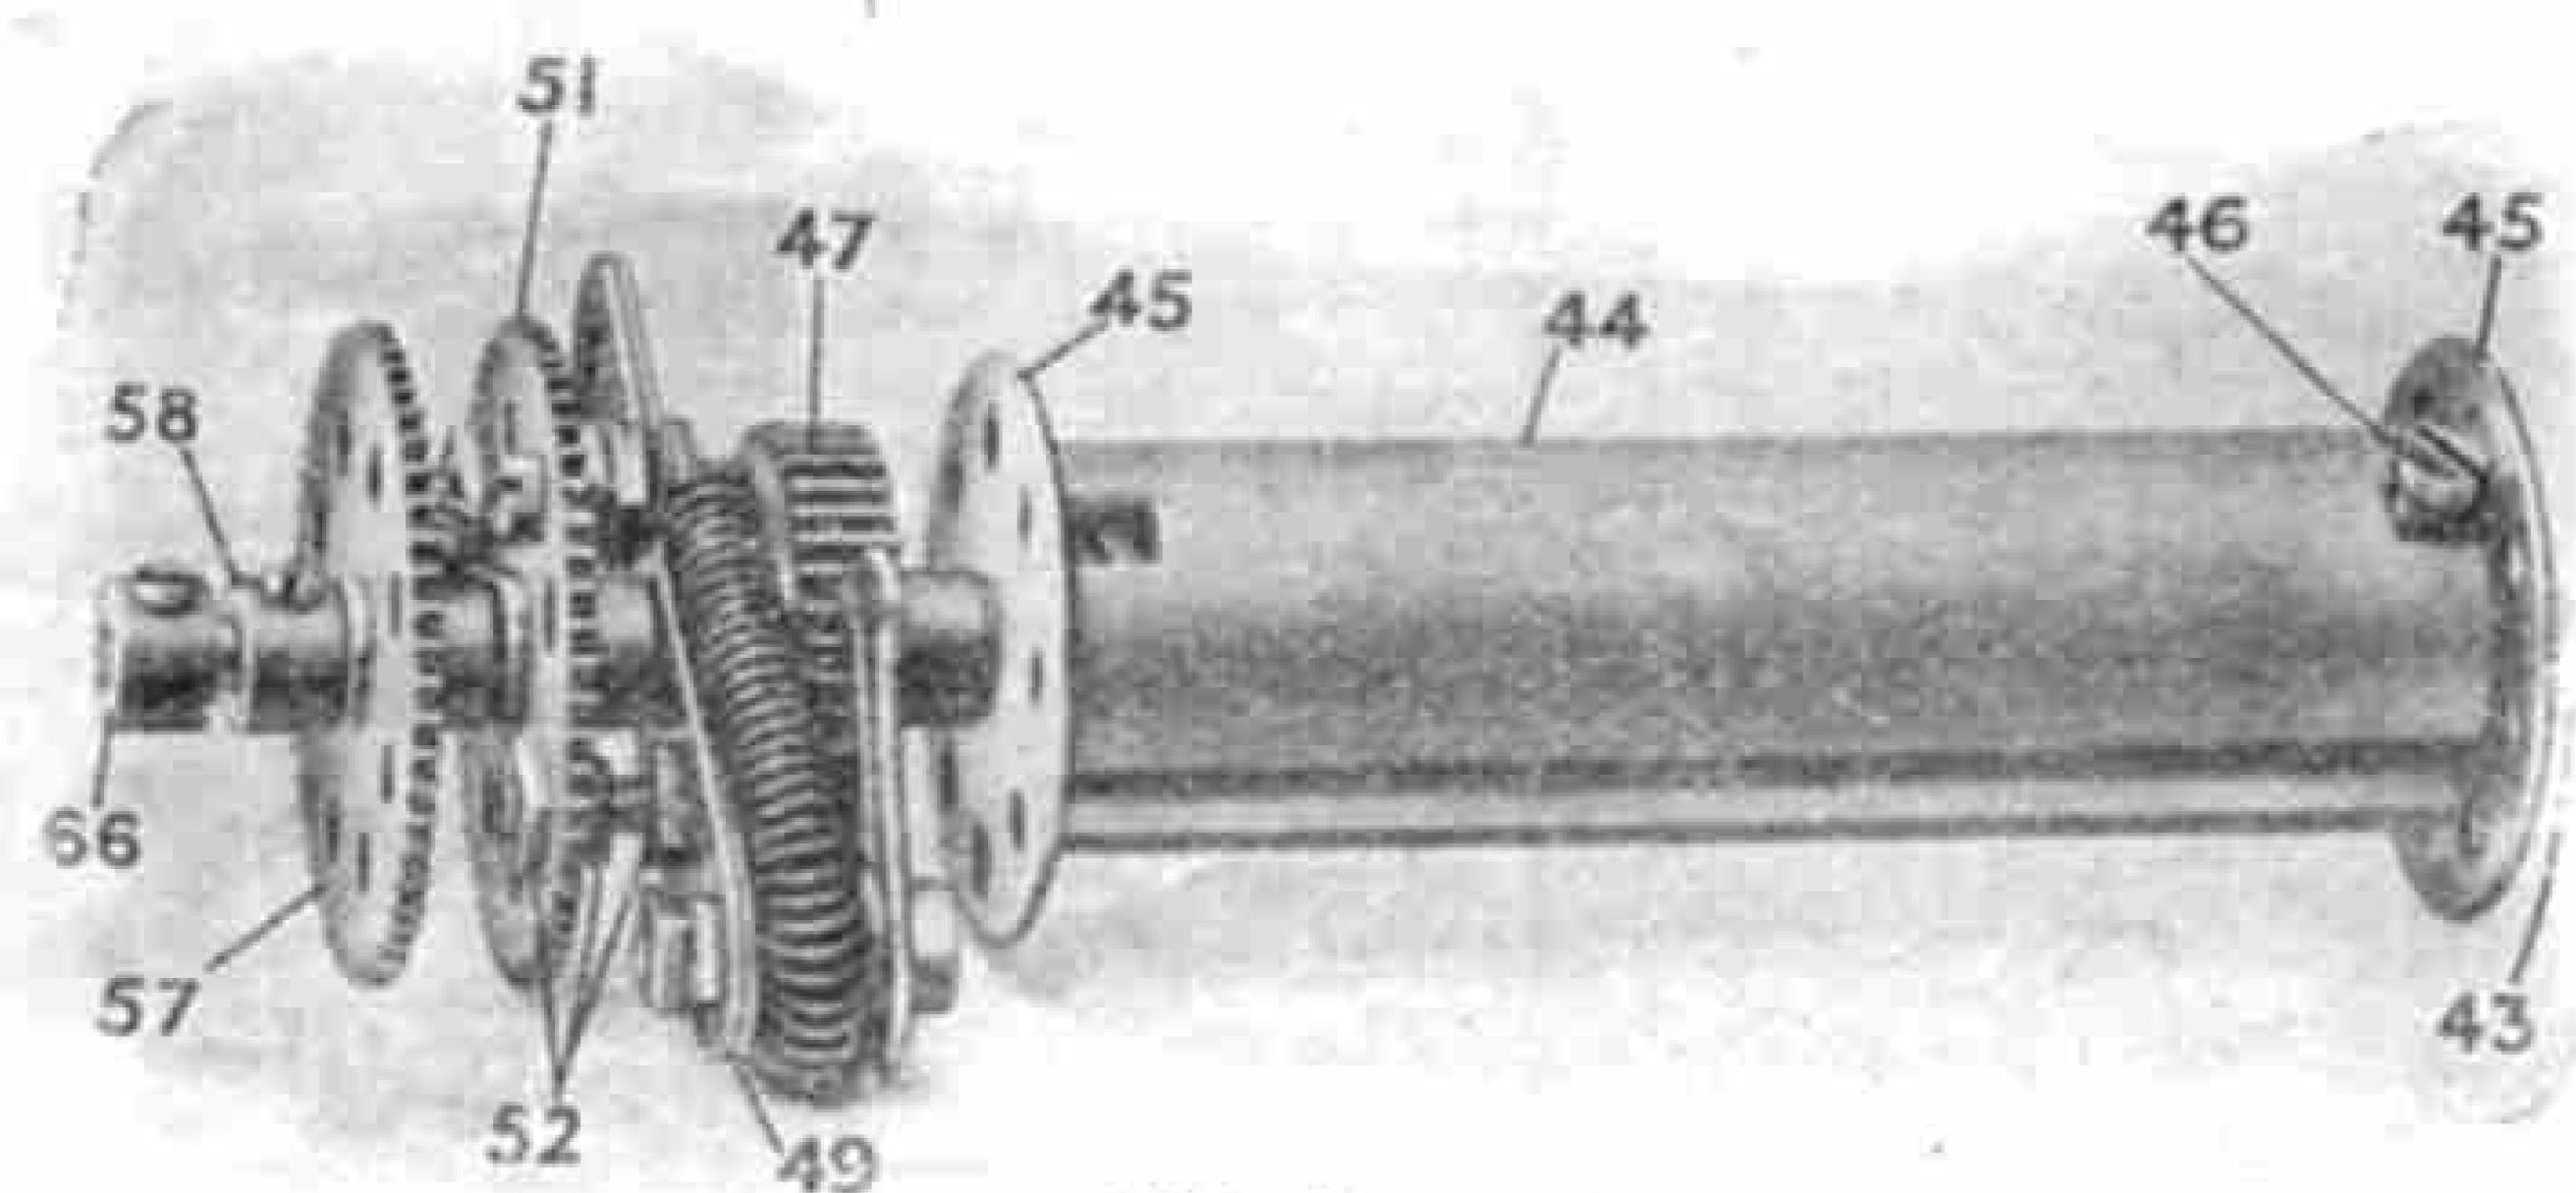


Fig. F



In this column the Editor replies to letters from his readers, from whom he is always pleased to hear. He receives hundreds of letters each day, but only those that deal with matters of general interest can be dealt with here. Correspondents will help the Editor if they will write neatly in ink and on one side of the paper only.

Ian MacDonald (?).-We have received your letter enclosing 1/8 subscription for the " M.M." You have not sent us your address, however, and we shall be glad if you will kindly do so in order to enable us to

H. Dewhurst (Neison). - You are indeed fortunate in having secured a Club Leader who has given his members the use of his Art Gallery, Library, Billiard Table and Lathe. No wonder you enjoy the club nights so much. Your club magazine is very credit-

M. J. Rowlands (Trawsfynydd).-" Meccano En courages Concentration, Carefulness, Alertness, Neatness, Originality." Very neatly put and quite true. W. G. Ford (West Croydon) .- "Your articles are always so ripping that it makes us emulate Oliver Twist." It is through having so many Oliver Twists amongst our readers that we have been compelled to increase the size of the " M.M." so many times. We think our Christmas Number will satisfy even your

own voracious appetite. L. C. Denis (London).—Your solution to J. Miller's puzzle in the October Magazine is quite correct; " J. Miller first had 7 strips and his chum had 5. The chum divided his strips with his brother and then they all had 4 each." We were interested to hear that you solved the problem by Algebra. We have happy (!) memories of trying to make x=y.

S. Whitehead (King's Heath). - You also have solved the puzzle. We see that we shall have to think o fromething really difficult for our new Puzzle Column I D. O. Boyd (Callestick).—A Competition for the best photograph of the nest and eggs of a British bird would, we fear, scarcely bring sufficient entries. We are, however, always giad to receive and pay for any such

photographs that are suitable for reproduction. L. B. Perkins (Bradford).-We appreciate your praise for the "M.M." Sorry we said "Photographic." Our printers try to explain it by saying that the compositor had the hump when he set the

word. W. Tomsett (Saundersfoot).-If you order the "M.M." from Messrs. W. H. Smith & Sons they will supply it to you regularly. We shall reprint " Dick's visit to Meccanoland" later, possibly in the "M.M."

H. E. Huisle (Paddington).—" A fine way of keeping the muscles strong is to get on all-fours so that the soles and heels of your boots touch a wall. Now, walk up it by moving the hands towards the wall and the feet up it." Excellent for light-weights, Herbert, but not for the poor Editor. He must just jog along with flabby muscles!

A. J. Lewis (Wynberg, S.A.).—Your letters are always welcome, and we are particularly pleased to hear of your early promotion. We hope the Wynberg Meccano Club and its fifty members will have a successful winter.

E R. Whiting (Claremont, W.A.) - Your cryptogram "How I snacco 2 todemansirig," is ingenious, but we fear it is a little too difficult for most people. Don't waste too much time on perpetual motion. Mr. Hornby once tried it, but he failed, just as everyone must. We hope you will write to us often. FA. Neilson (Buenos Aires).-We are very glad to


hear of your safe arrival home, and to know that you retain such pleasant memories of your visit to the Meccano factory and of your talk with Mr. Hornby. We hope to deal with your suggestions in a later issue. E. Shipley (Walsall).—" W21i Ni S4imy6 e slev qs2 ko21h5i2 3m h163mt qsIq s4imy6 qi13mh 2cx20 100 4qseih." Mr. Hornby thanks you for the message in your cryptogram, and for all the good things you

say in your letter. W. S. Lee (Clinton, B.C.)-We are sorry your club broke up on account of counter attractions. Now is the time to start it again By all means send us particulars of the radio set that is giving such good results. We are pleased Meccano helped you so much

S. Johnson (Bedford).-" The poor benighted Hindoo, He does the best he kindoo, From first to last

room for them

He keeps his caste, And for clothes he makes his skindoo." You have a well-developed sense of humour, Sidney, and we are sorry we are only able to find room for one of your little poems. If you ever write similar life stories of other native tribes we will try to make

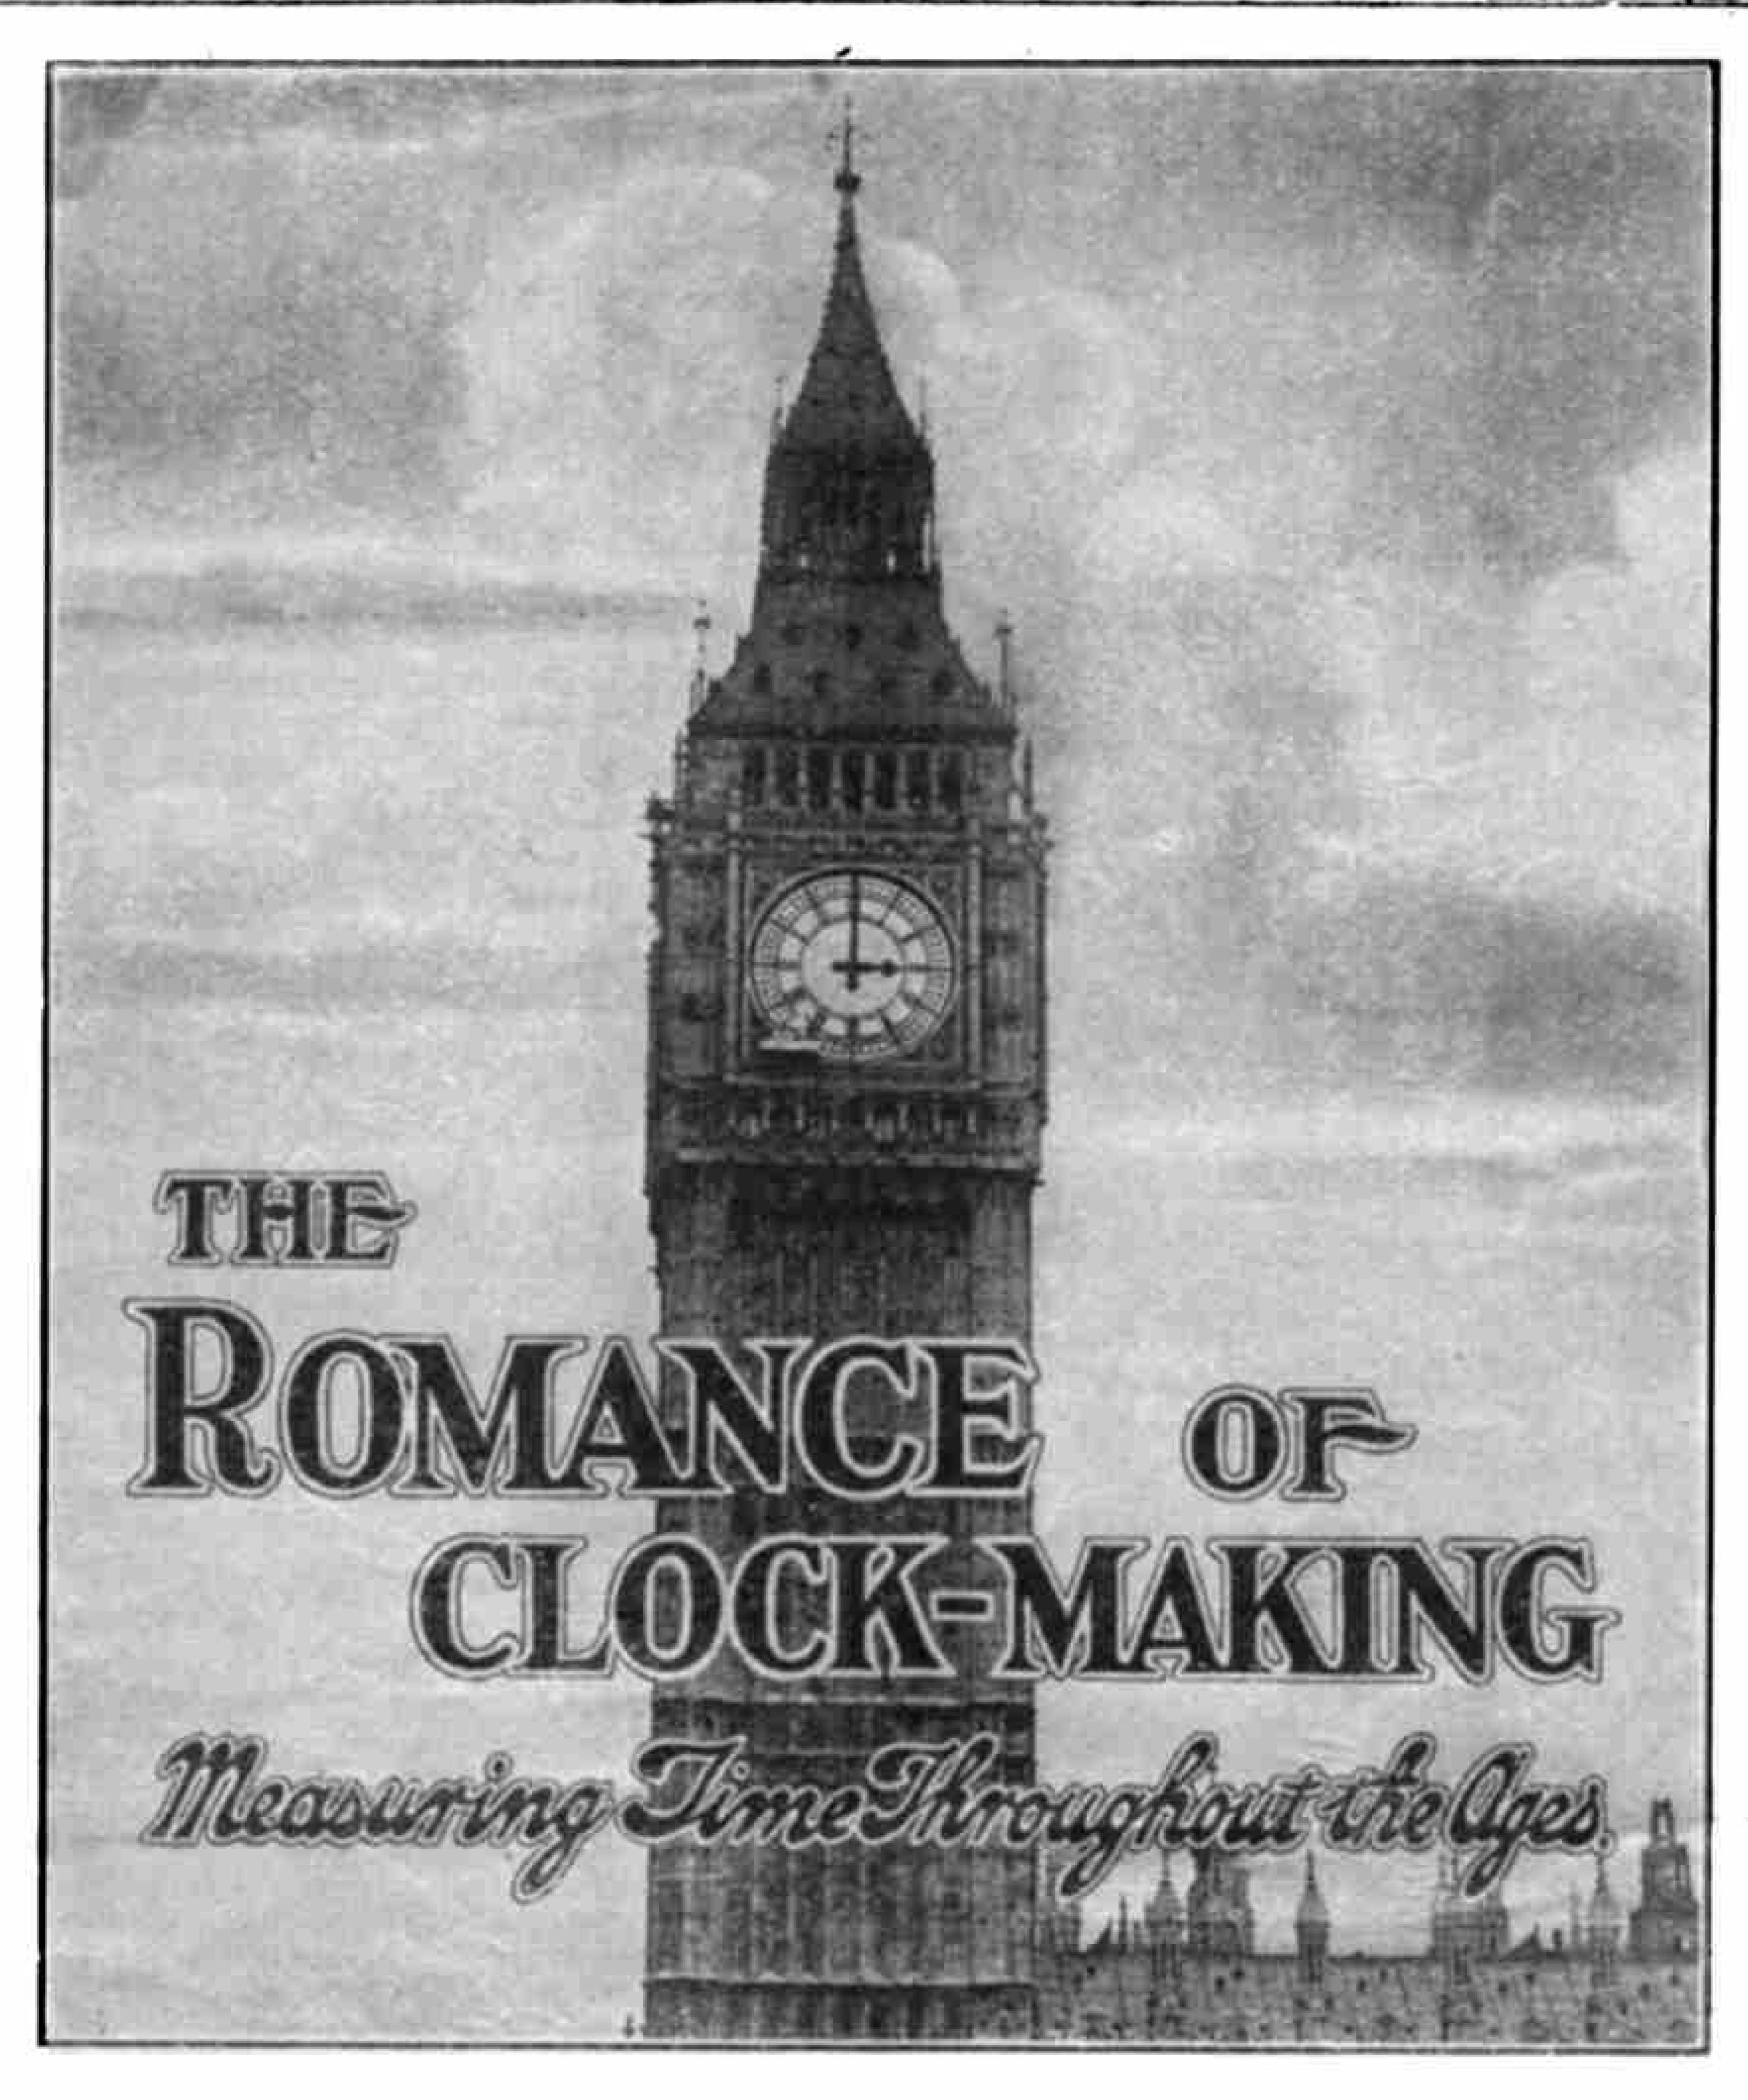

amount of thought and work that has been necessary to bring to perfection the mechanism of a clock. In these days clocks and watches are so numerous, and may be purchased for so little, that we forget the wonderful story that lies behind the measuring of time throughout the ages.

How many of us realise, for instance, that the accuracy of our time depends upon an astronomer's observations at Greenwich Observatory? Although it is very interesting to learn about the canals of Mars; about the wonderful clouds of Jupiter; or about the mountains of the Moon, a study of these objects does not fall within the duties of the astronomers at Greenwich. They are more concerned in checking and keeping correct their master clocks that give the time to all the clocks in the country.

Astronomers Keep Our Clocks Right

Every night the astronomers watch with a large telescope for the passing of a star across a particular part of the sky, which passage denotes the correct time. The diagram on this page illustrates what the astronomers see when they are checking the time. In the telescope are several vertical lines, which are actually portions of a spider's web placed in the eye-piece of the instrument. It is possible to calculate the exact instant when a star should pass each of these lines, and the observer watches for this to take place. The star

enters the field of view from the left and passes each of the lines in turn. In the accompanying figure the star lettered A has passed the second line and is approaching the centre of the field. The star B is exactly on the second line. When the observer sees that the star is on a vertical line he presses a key, which completes an electric circuit and the exact instant is marked on the cylinder of a recording machine.

The work of the astronomers enables us all to get up punctually; school to start to the minute; and express trains to depart "on the tick." Imagine the chaos that would result if the astronomers set the nation's clocks half-an-hour late! We should all be up late; schools would be late; trains would be all wrong and everyone would be in a bad temper as a result!

Even greater confusion would result at sea, however, for a sailor cannot find the exact position of his ship unless he is provided with the correct time. He obtains this information by wireless. time signals being sent out at stated periods by the Eiffel Tower and other large stations. It is the astronomer who ensures that the radio signals are broadcast at the correct instant. In the case of the Eiffel Tower, for instance, transmissions are actually sent out by a master clock at Paris Observatory, the time of which is checked with the passage of different stars several times during the night.

Primitive Measuring Devices

Have any of you boys ever wondered how the people of old were able to tell the time, long before watches and clocks were invented? They did so either by the Sun or the Moon, noting their position in the heavens by day or night. In those days time was not measured by hours, minutes, or seconds as it is to-day. Instead, it was divided into "years," according to the apparent motion of the Sun among the stars; into "months" by the revolution of the Moon around the earth (the word "month" indicates this); and into "days" by the alternate light and darkness, caused by the rising and setting of the Sun.


Later, the day was divided into several equal portions by watching the movement of a shadow; for as the Sun moves through the sky the position of a shadow continually changes. The different positions were marked by means of pieces of wood or stone, placed on the ground. By these means the ancients were able to measure the passage of time, principally with a view to obtaining a more accurate idea as to when to expect darkness to descend upon the land.

A development of this early device was the sun-dial, examples of which are to be seen to-day outside some old churches or in old-world gardens. The earliest record of a sun-dial is found in the Bible, where in the II Book of Kings, chap. xx., v. 11, we read of "the dial of Ahaz." The Sun does not always shine, however, and when it is cloudy sun-dials are useless.


The Water-Clock

As civilisation spread, and the lives of people become more ordered and regular, there was an increasing demand for some other device for measuring time. This resulted in the introduction of the Clepsydra or Water-Clock, which is of great antiquity. From old models discovered, and from references in ancient documents, we know that water-clocks were used by the Greeks and also by the Indian tribes of America. Julius Cæsar, when he invaded Britain in B.C. 55 found water-clocks in use among the natives, and with these clocks is said to have observed that the summer nights in Britain were shorter than those in Italy.

In its original form the water-clock consisted of a vessel filled with water, which was allowed to escape through a

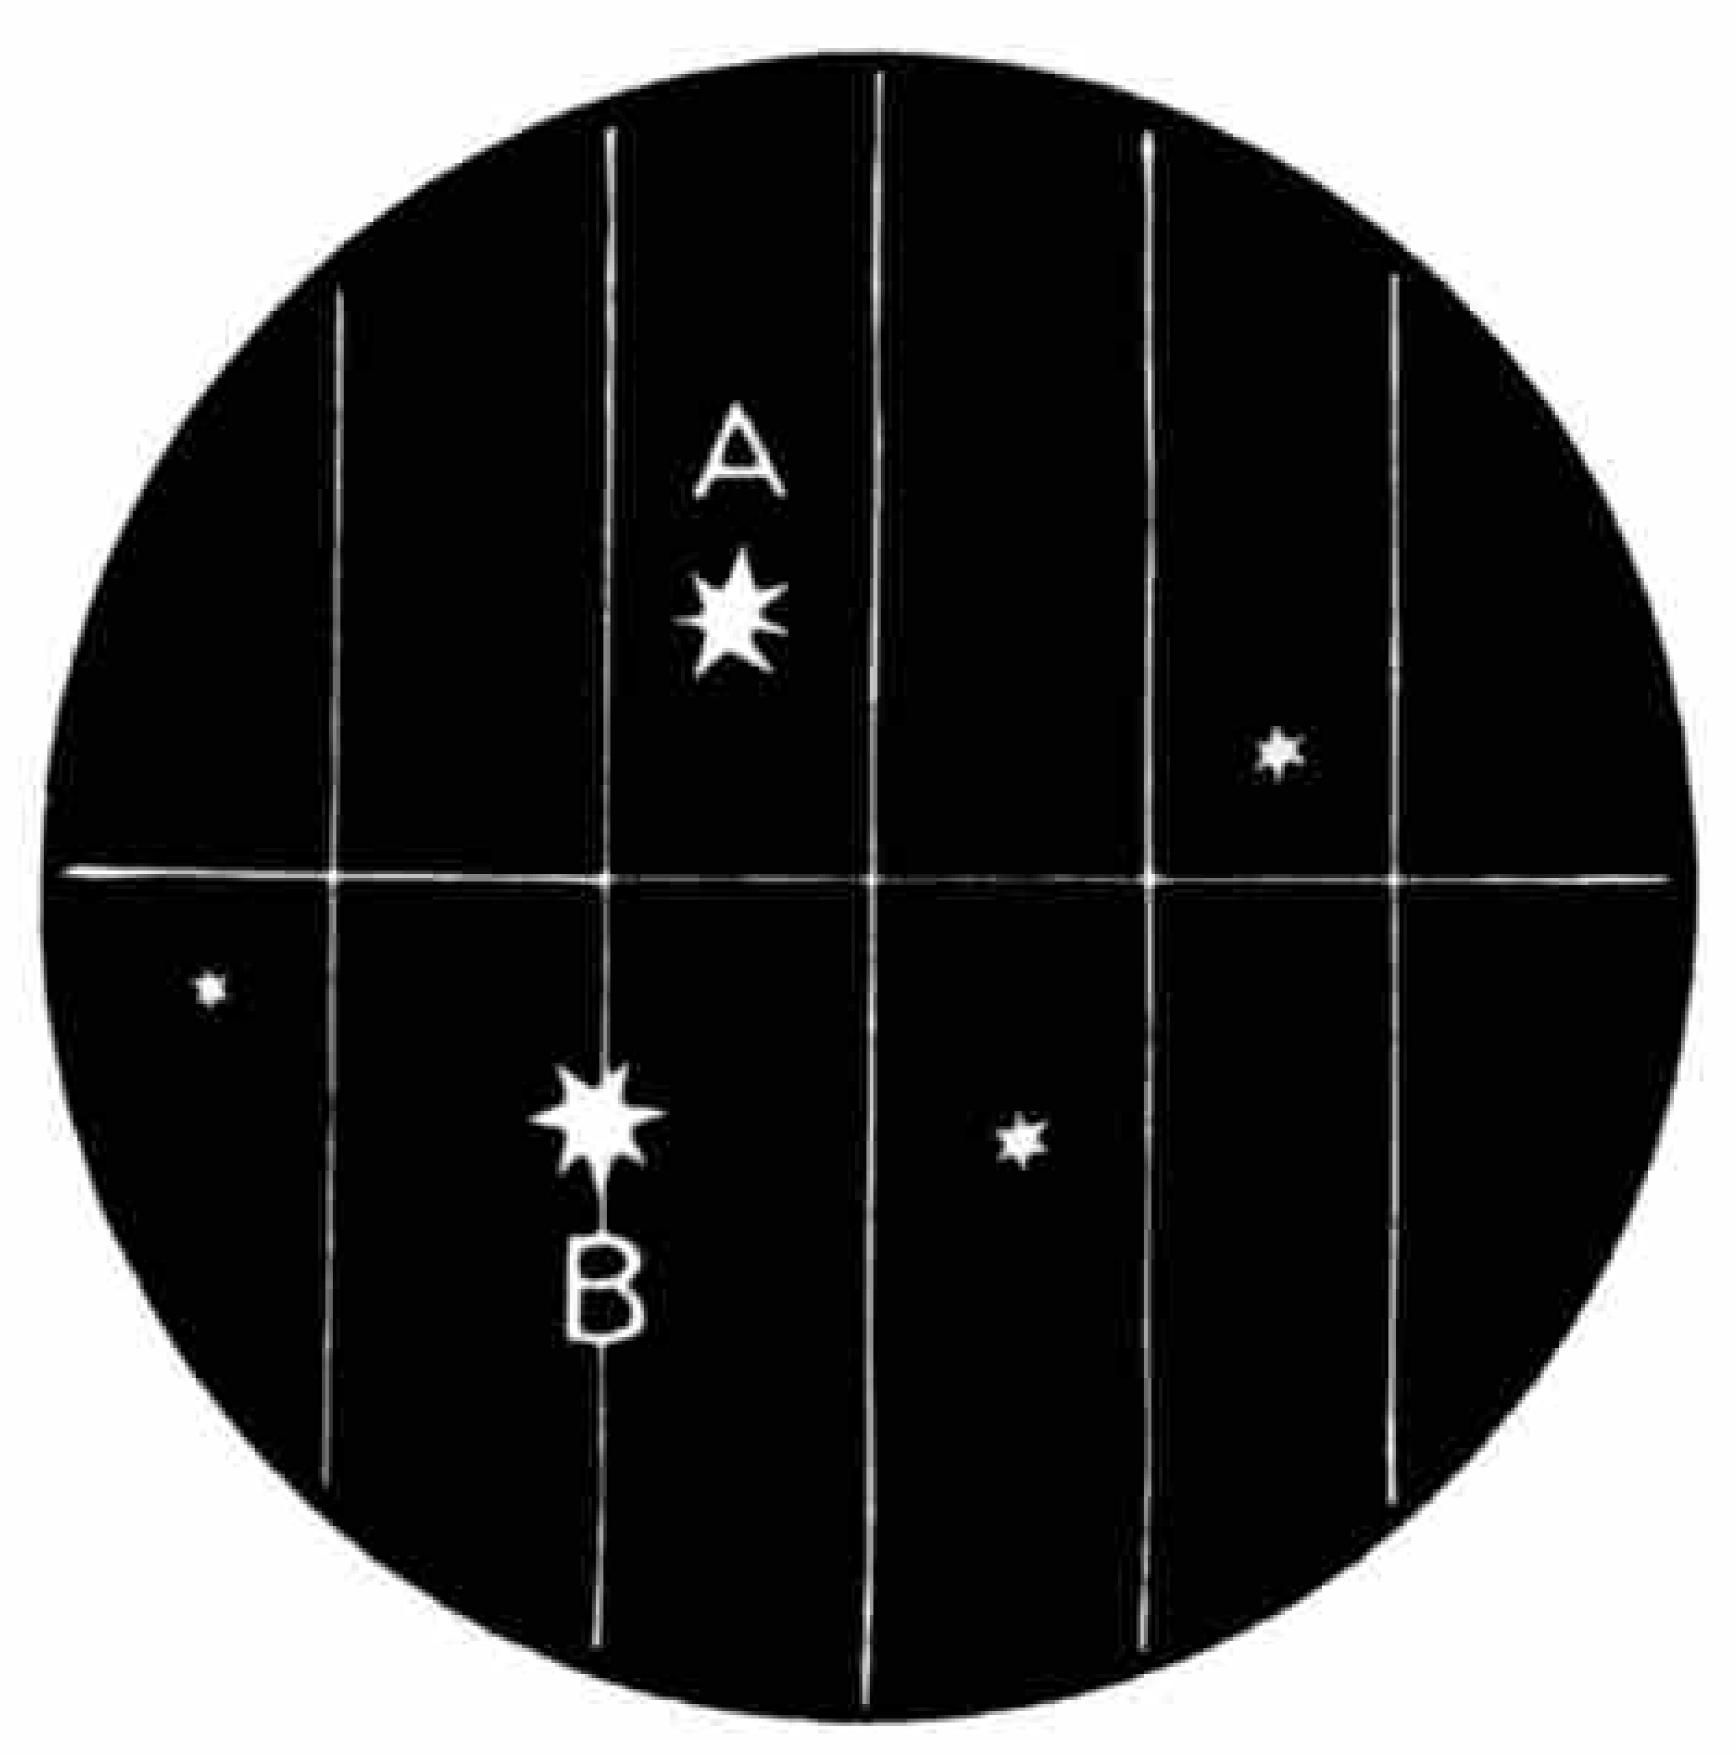

What the astronomer sees when he looks through the transit instrument—a telescope with lines marked in the eye-piece.

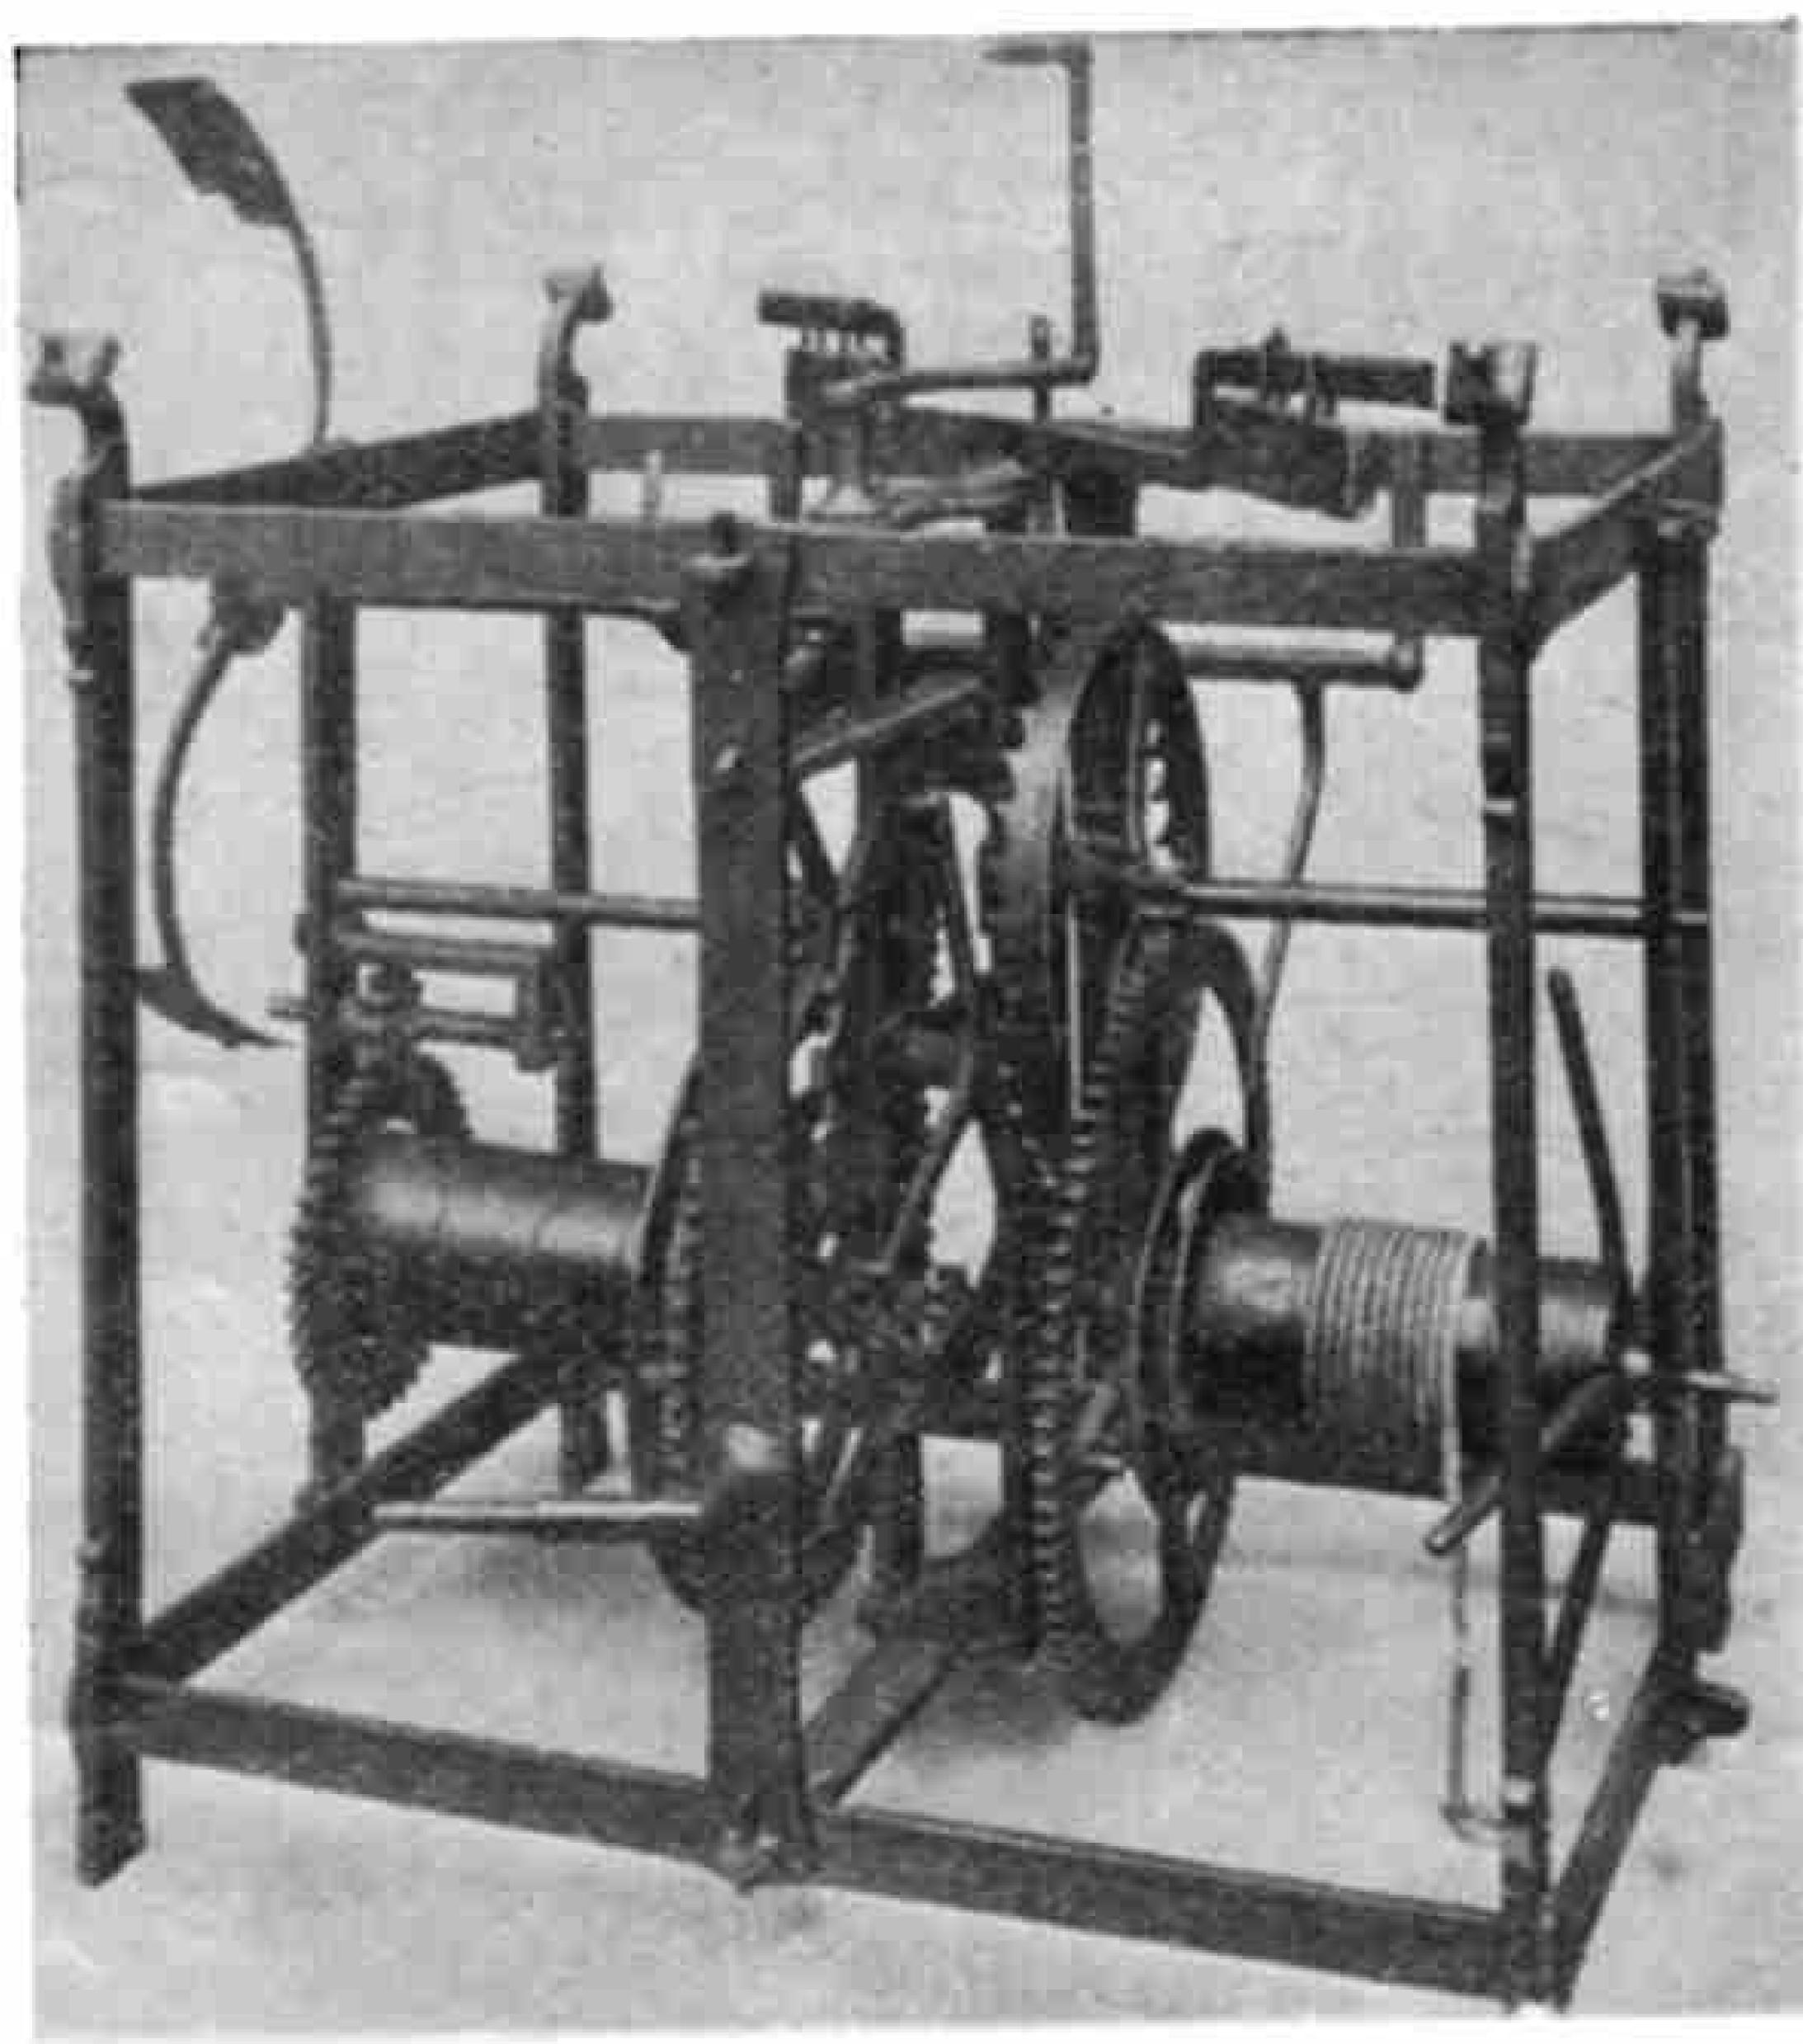

The Famous Dover Castle Clock

small hole. By noting how far the level of the water had fallen, it was not difficult to determine the interval of time that had passed since the vessel was filled.

Water-clocks—which could, of course, be used by day or by night—were subsequently improved, and in a later form the water dripped into a second vessel, in which a wooden figure was placed. As the level of the water rose in the second vessel the wooden figure floated higher and higher, and the intervals of time were thus more easily noticed.

Soon afterwards hour symbols were painted on the inside of the vessel and a figure with an outstretched arm was used as a float. As the figure rose, the outstretched arm pointed to the hour on the inner side of the vessel, ultimately resulting in the hour-hand of our present day clocks.

How the Clock-Face Originated

In another type of waterclock a dial similar to a clockface was placed over the vessel containing the water. On the water floated a piece of wood attached to which was a string running over a wheel connected to the hands on the dial. The water was allowed to drip from the vessel so that it took exactly a day to empty. As the floating wood sank lower and lower, the string pulled the hand around the dial. In this form of waterclock the face had twenty-four figures. The device could only record the hours, however, because it had only one hand.

A considerable amount of skill was exercised in the construction of these water-clocks, as is evident from models to be seen in many of our museums. Some of these models are of very beautiful design and clever craftsmanship. One famous example, in brass, was sent in the year 800 by the King of Persia to the Emperor Charlemagne. In

this clock twelve figures of horsemen marched out of twelve windows one by one, according to the hour. When twelve hours had passed the figures returned again, closing the windows after them as they marched back!

Measuring Time with Sand


About the year 330 A.D. sand-glasses were introduced. These were glass vessels shaped something like a figure 8, the narrow waist of which only allowed the sand placed in the top half of the glass to run through grain by grain. It required an hour for the sand to pass from the top to the lower half of the glass, after which the glass had to be turned upside down again so that the next hour could be measured by the sand running back again. Although it was not difficult to roughly ascertain how much of the hour had gone by the quantity of sand had fallen, the great

disadvantage of sand-glasses was that people often forgot to turn them back after the hour was run, and so lost the correct time. Then again, unless they were continually attended to during the night, the time was lost and the hours could only be counted from the time at which the owner of the glass awakened and started off the sand-glass! Because of these disadvantages it is not surprising to learn that sand-glasses were not in use for very long.

Candle-Clocks

Another early method of measuring time was by burning long candles, made to burn for a certain number of hours. These candles had divisions down their sides, each mark showing when an hour had passed. Candle clocks were very unreliable, however, for the slightest draught would alter the rate at which the candles burned, causing them to incorrectly measure time.

(To be continued)

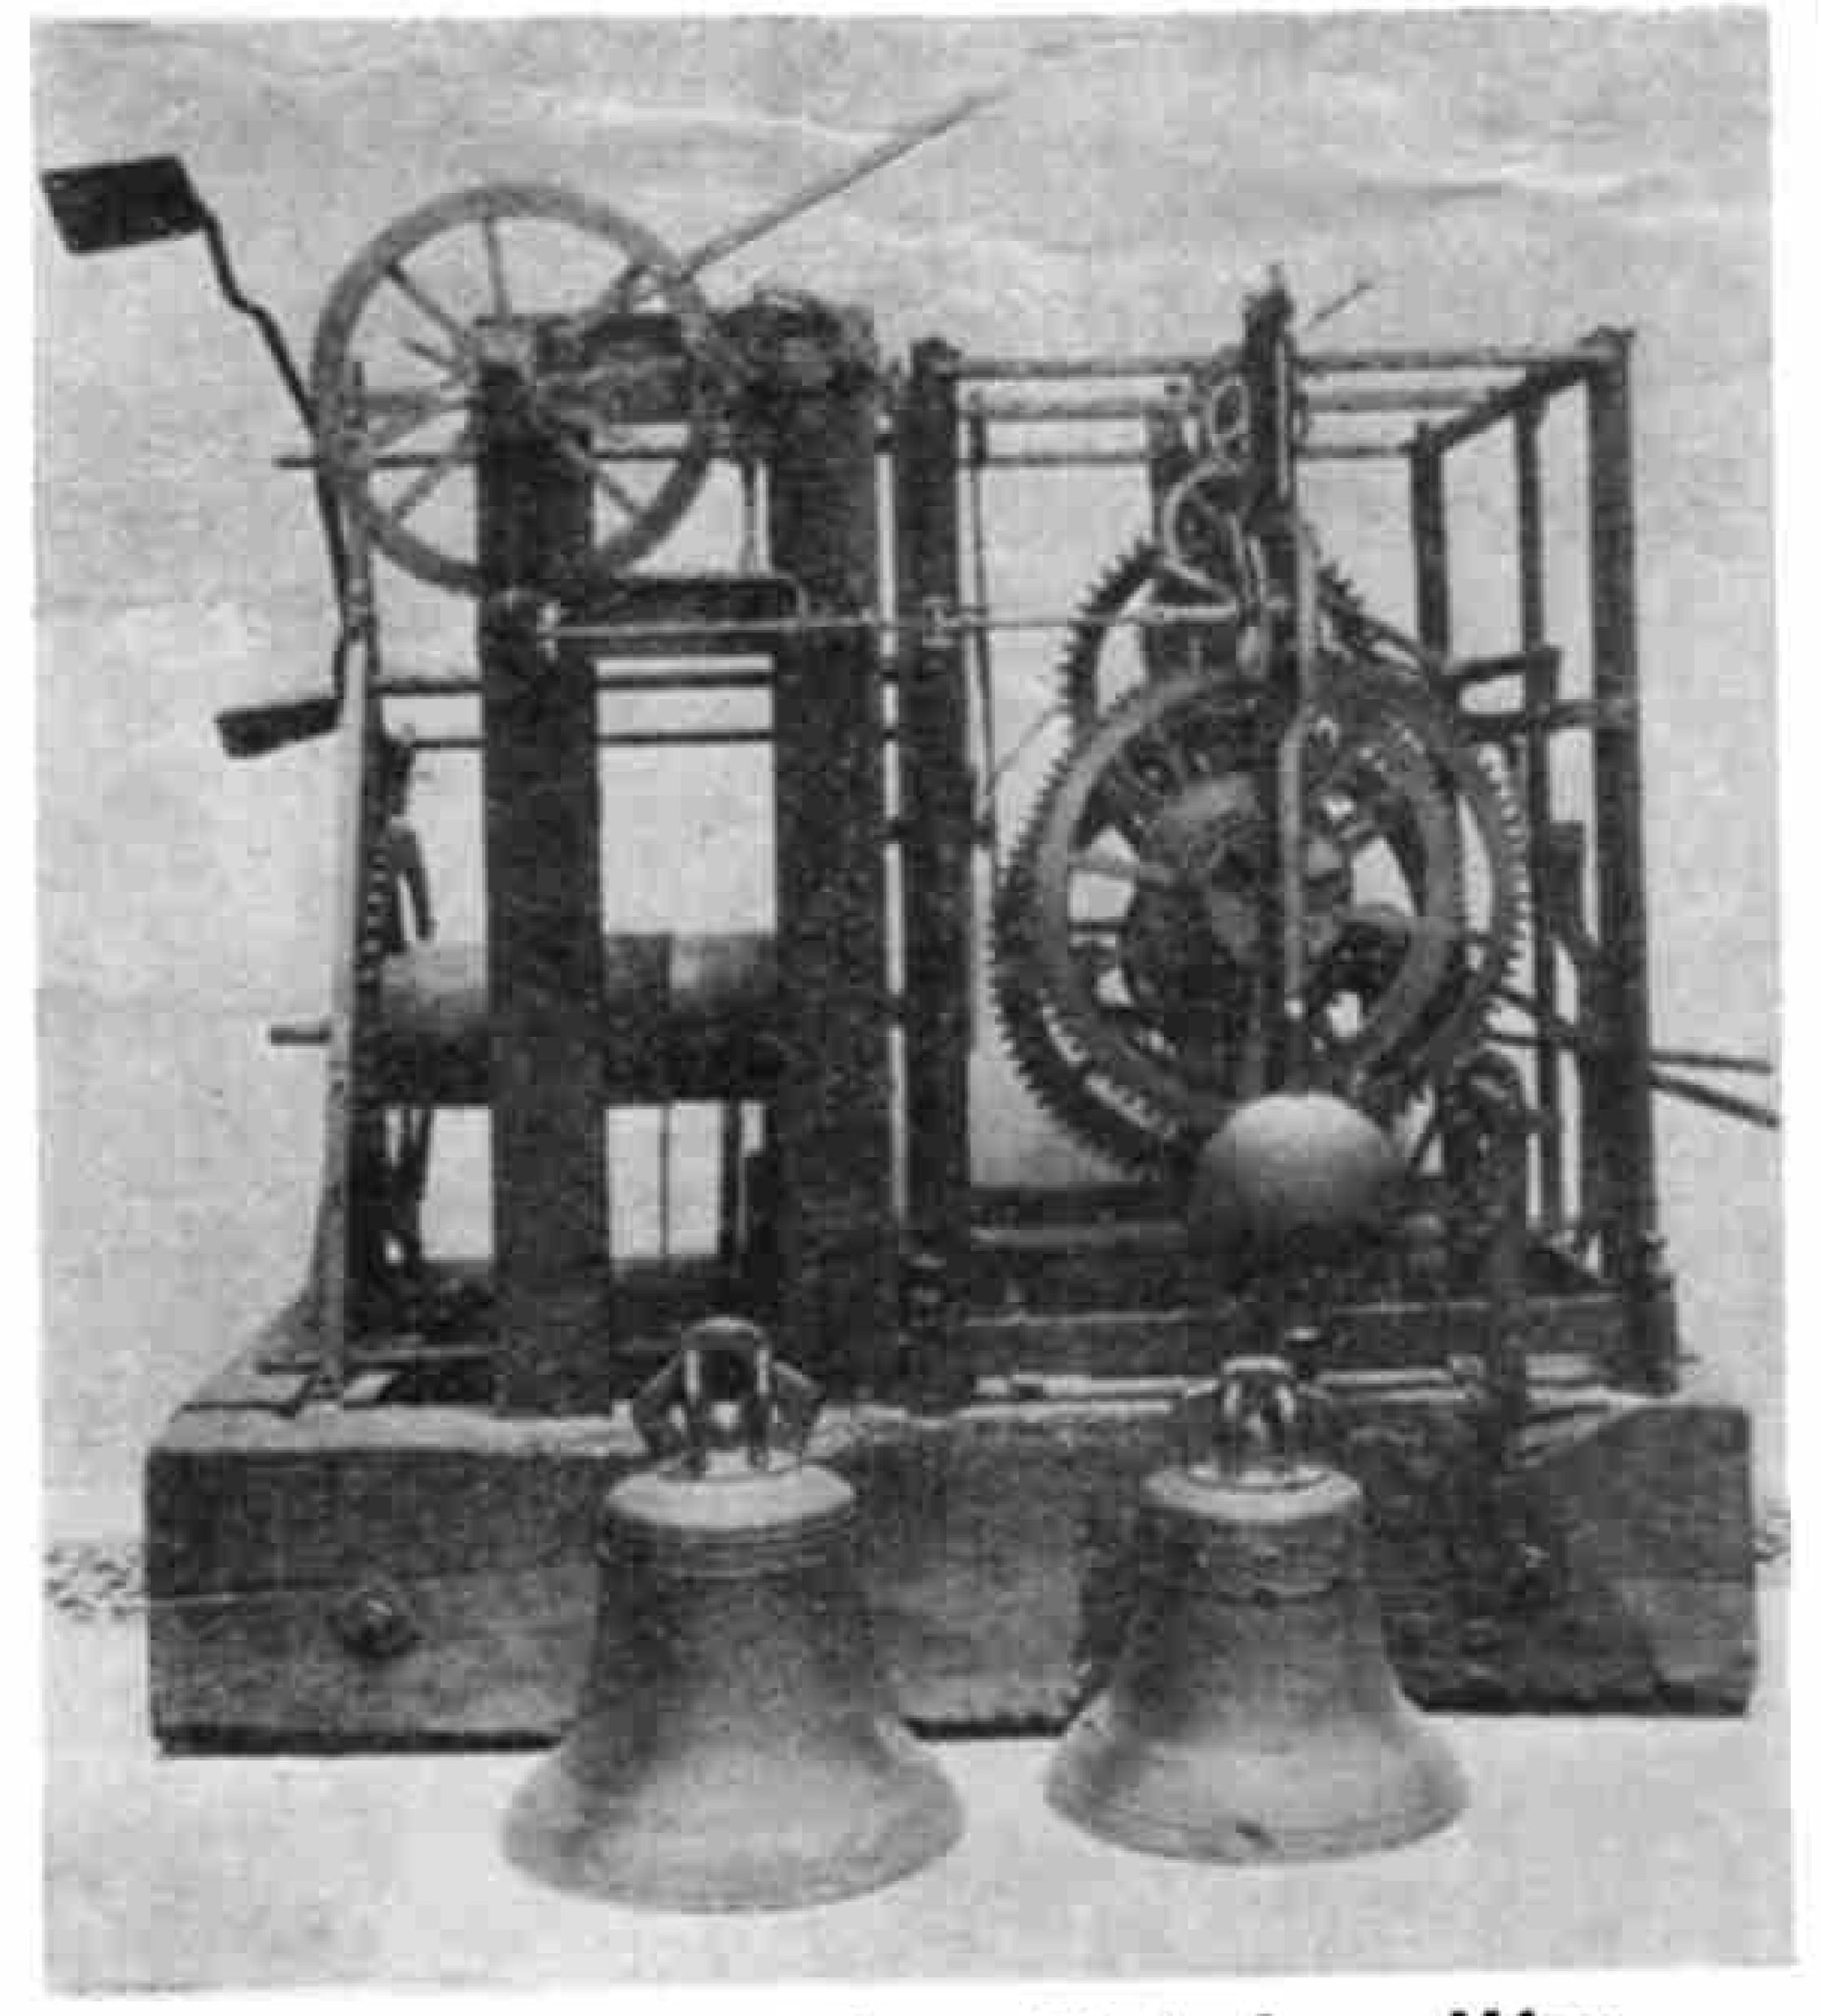

The Ancient Clock from Glastonbury Abbey



sent in by Meccano users
for new parts, new models
and new ways of making
Mecca no model-building

attractive. We are always pleased to hear from any Meccano boy who has an idea which he considers will be useful in the Meccano system.

Leonard Powell (Crewe).—A crank on the lines of your suggestion may be constructed from two crank pieces, spaced by a coupling mounted on a 1½" rod at the flat ends, and secured on the outsides by collars. The centre grub-screws may then be removed and the screwed rod inserted in this hole.

Lance Kramer (Cheltenham).—Wire wheels would be expensive to make, and in our opinion would not be any more useful than the existing large pulley. In our Chassis Leaflet we illustrate these wheels fitted with a thick rubber ring to represent tyres. We do not stock the rubber rings on account of their perishable nature.

H. Leslie Brook (Cranlie Cottage).—(1) We shall consider carefully the matter of your suggested double crank. (2) What is the object of your suggestion to remove the groove in the 1" pulley? (3) The present 3" pulley serves the purpose of your suggestion. (4) We already list a 1" reversed bracket (No. 124).

B. C. Curby (Wooden Ferries).—We already have

E. G. Robinson (Leeds).—Forked couplings have a very wide range. Several combinations suggest themselves and we shall go carefully into their adaptability and cost of manufacture.

L. Burstert (Marseilles).—Grooves in our rod are not practical on account of the smallness of the diameter. We are examining a method for giving a sliding action.

Harold Green.—(1) Your suggested sprocket wheel is not possible on account of the width of the boss being more than ½". (2) We have not yet found any mechanical combination requiring a cone sprocket, and we should be interested to hear whether you have.

A. Despeyroux (Mezin, Nord).—(1) We do not stock rubber rings on account of their highly perishable nature. (2) We do not as yet contemplate manufacturing steam models, but probably we shall go into the matter at some future date.

A. de Vaucieroy (Moulton).—(1) Sectional pieces for constructing ships' hulls are scarcely practical. Efficient sealing of the joints would be a difficulty, and a further disadvantage is that such sectional pieces do not lend themselves to general model construction. (2) The reason we brass our nuts and screws is to give a more pleasing contrast to the nickel strips. (3) We shall probably increase the range of bevel gears shortly. We do not employ bevel gears in our differential and suggest you send for a copy of the Chassis Leaflet.

Robert A. Harvey (London, S.W.).—There may be possibilities in a ratchet wheel, and we shall go into he matter.

C. Manciair (Fretegency).—(1) Secured to the face plate our present flanged disc gives a flanged wheel.
(2) We do not see any general use for your suggested thin steel strips for centrifugal governors.

G. A. Liardet (Bradford).—(1) We have already considered a groove in our rod for a sliding action, but it was found to be impracticable on account of the smallness of the diameter. (2) Will you give us instances where your suggested threaded wheels could be employed?

P. Harper (Wakefield).—With a constructional motor there is always the possibility of the standard of efficiency not being attained. For this reason we refrain from issuing the Meccano Motor in constructional form.

S. Gough (Smethwick).—We are interested in your special nut, and would like to have further details of its employment in any of the models you mention.

A Dakin (Bradford).—We shall go into the matter

A. Dakin (Bradford).—We shall go into the matter of a suitable mounting for models.

H. P. Croom-Johnson (Blaby).—We are constantly increasing our range of train accessories, and shall no doubt include such a carriage as you suggest, and also signals.

E. Thomson (Crieff).—We have in mind the question of flat angle strips on the lines of your suggestion.

E. C. Corps (Northampton).—A double angle strip, with flanges such as you suggest, may be constructed from a 11°, or any strip of the desired length, secured to reversed angle brackets.

H. R. Stafford (Sutton).—As far as we can make out from your sketch your suggested piston rod appears to be more on the lines of a crank shaft, similar to accessory part No. 134.


Leslie K. Thompson! (S. Petherton).—Various types of combination points and crossings will be added to our list in due course.

James Stevens (Kingston Hill, Surrey).—We have in mind new types of rolling stock for Hornby Trains, which it is our intention to make as comprehensive a system as possible.


New Rolling Stock and Accessories

HERE are new Wagons, Signals, Lamps, Stations, Turntables this year, all built in correct proportion to the Most important of all they have the uniformly size, gauge, method of coupling, etc., of the Hornby Trains. To use cheap-looking rolling stock or a beautiful finish which is the great feature of the Hornby system. foreign-looking station with a Hornby Train completely spoils the effect.

THE WINDSOR STATION is a thing of beauty—the only really British station obtainable. Its bright colouring and realistic appearance will bring joy to the heart of every boy who sees it.

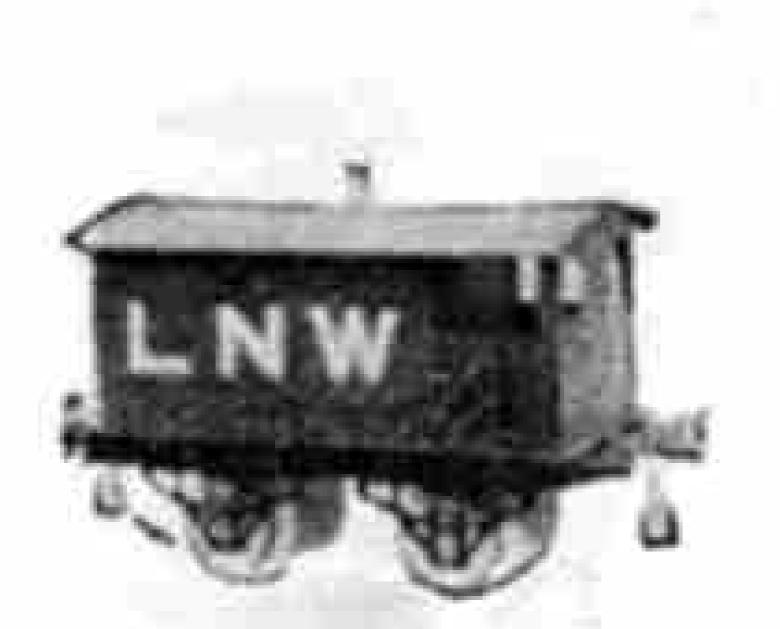


BRAKE VANS Finished in colour. Each 4 6

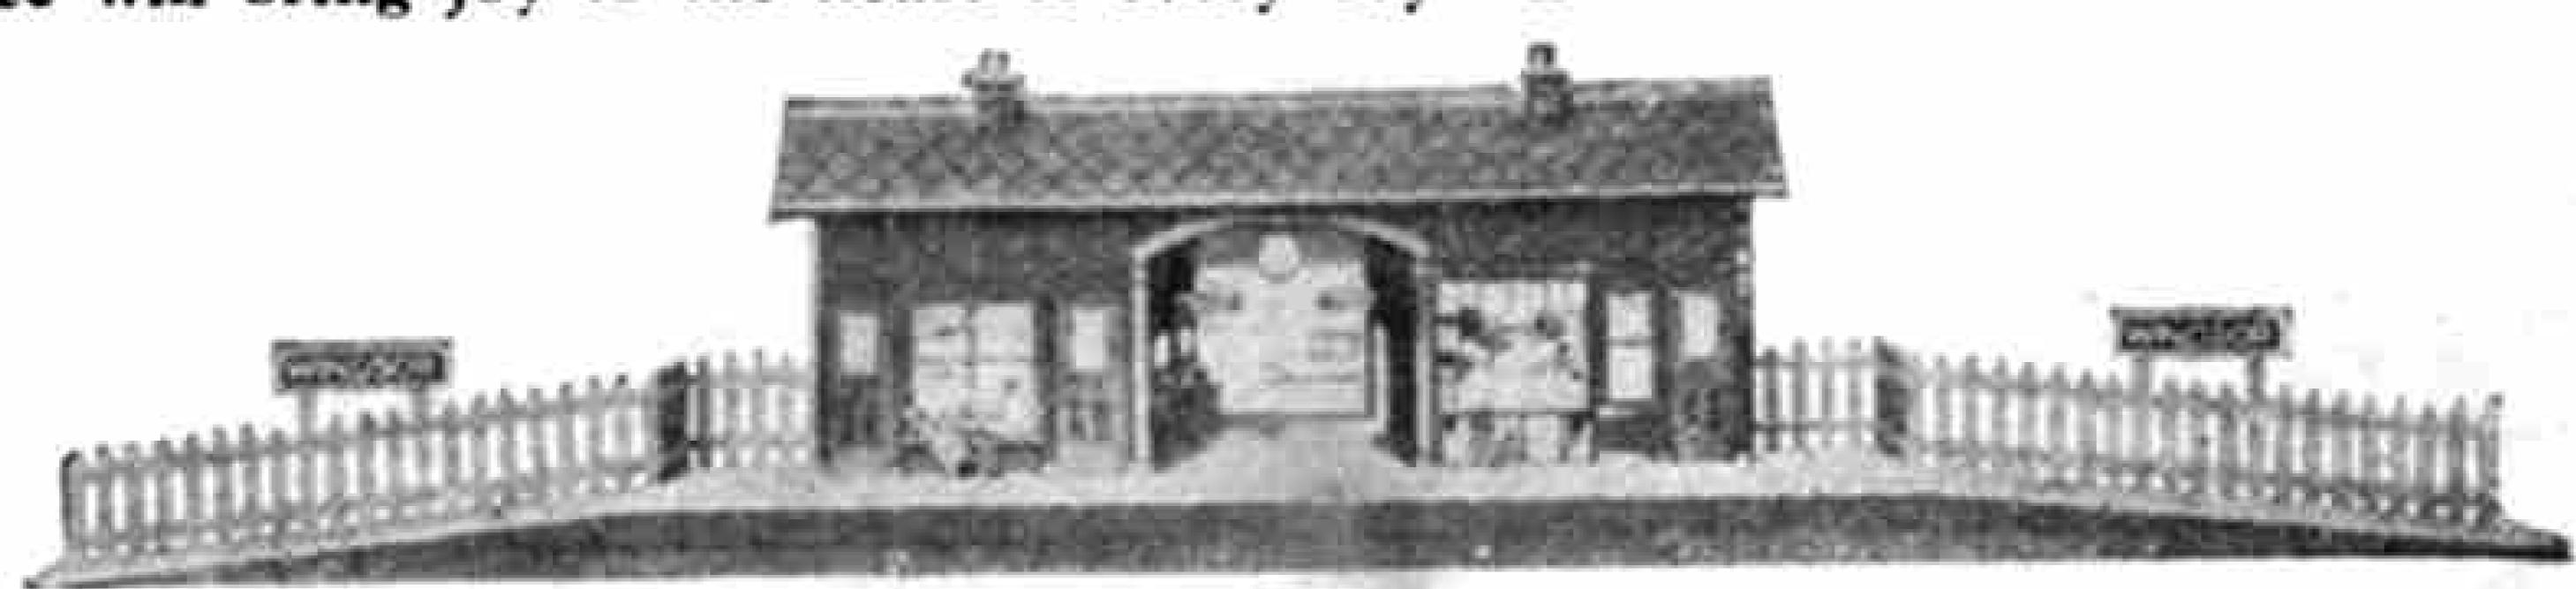


WINDSOR STATIONS Excellent models, beautifully designed and finished. Dimensions: Length 2 ft. 9 in., breadth 6 in., beight 7 in Each 12 6



No. 1 LUGGAGE VANS Letter M.R. Representative colours. Each 4/6

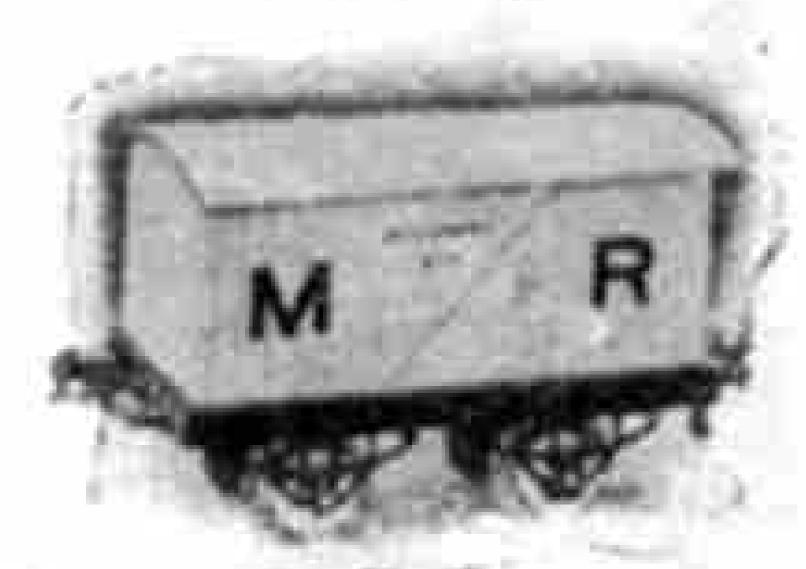


REFRIGERATOR VANS Enamelled in white. lettered black. Each 4 6

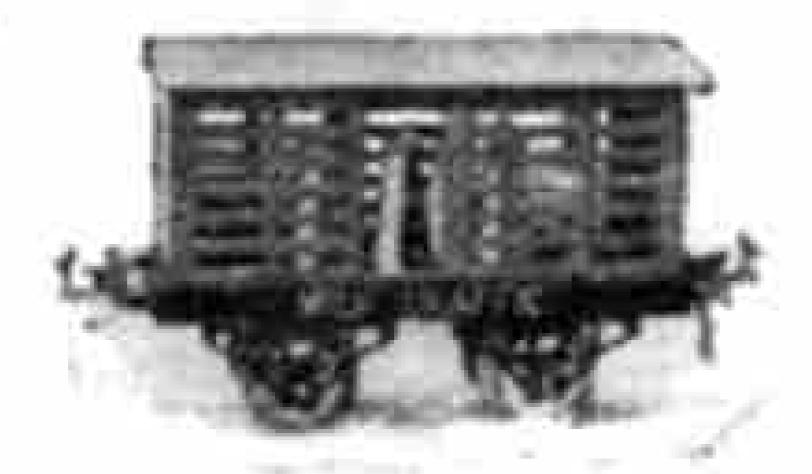

MILK TRAFFIC VANS Fitted with sliding door, complete with milk cans. Each 5/-

Fitted with bolsters and stanchions for log transport. Fitted with bolsters and stanchion

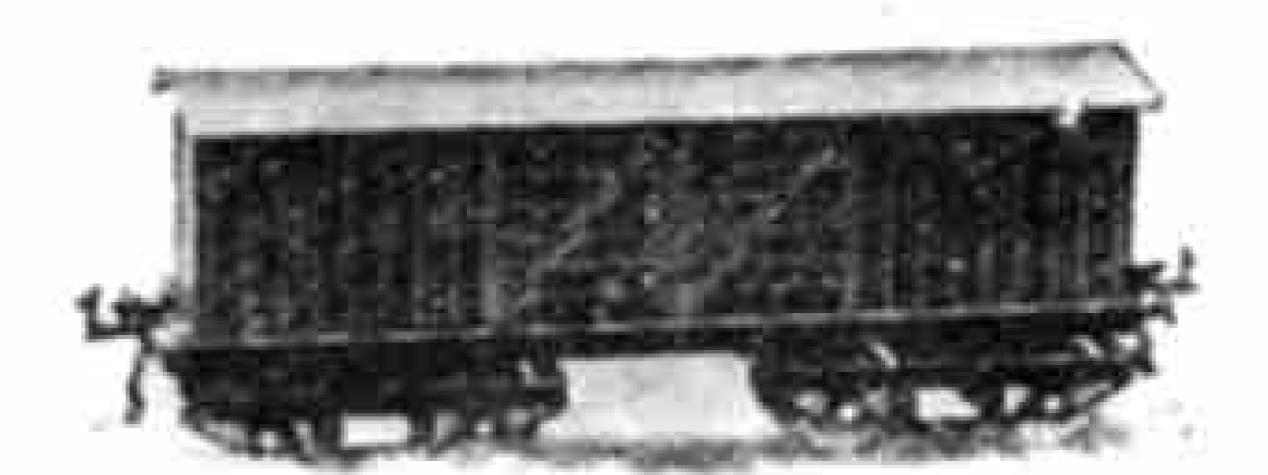


No. 2 LUGGAGE VANS Finished in colour. Fitted with double doors. Suitable for 2 ft. radius rails only. From 7 -




GUNPOWDER VANST Finished in red. Each 4 6




No. 1 CATTLE TRUCKS Fitted with sliding door, Very realistic design.

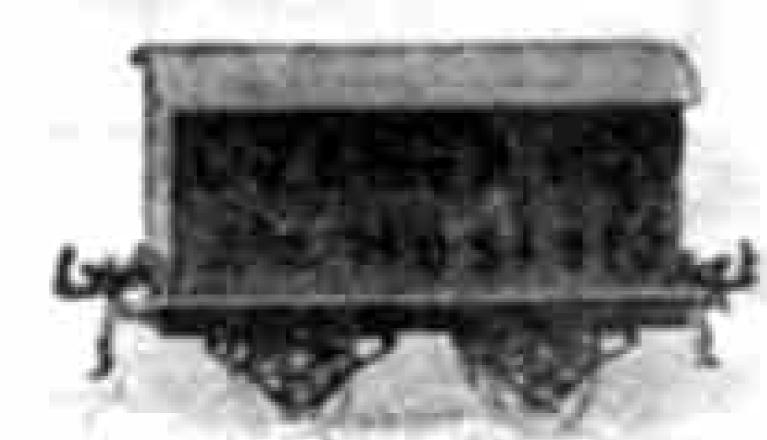


COLMAN'S MUSTARD VANS Finished in colour. Each 4/6

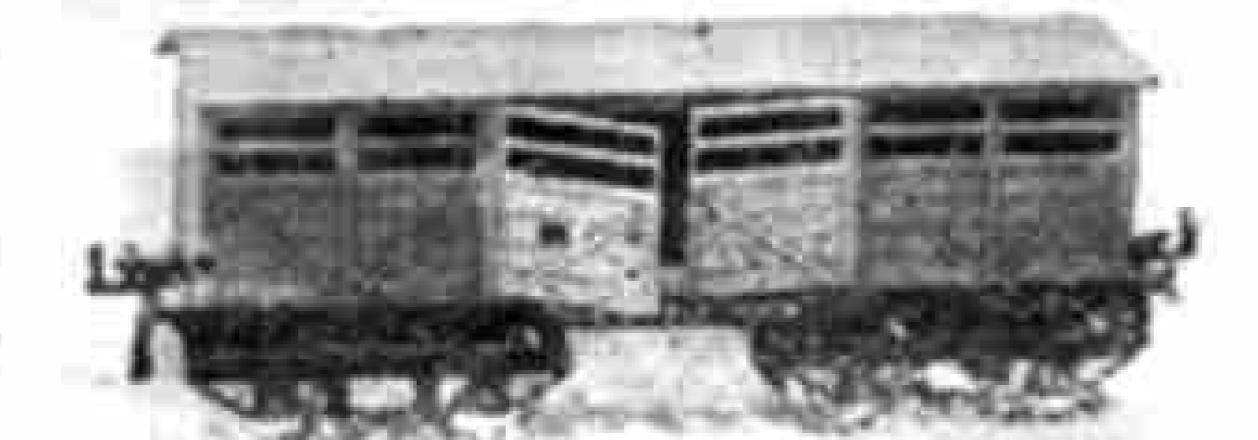


No. 2 CATTLE TRUCKS Splendid models, fitted with double door Suitable for 2 It. radius calls only. Each 7 .-

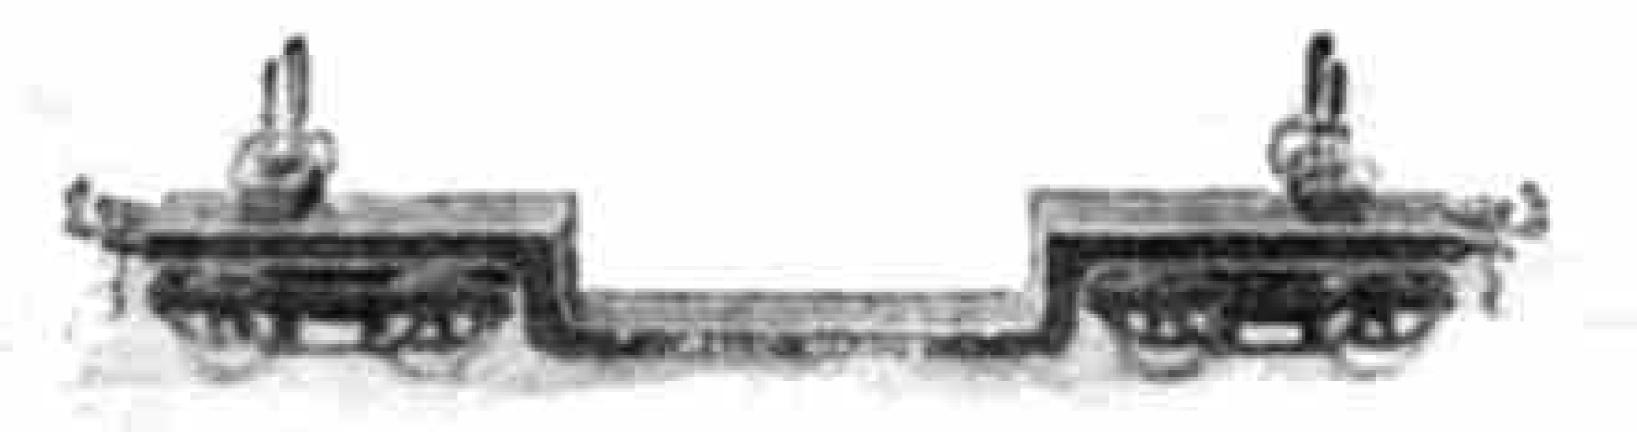


TROLLEY WAGONS. isnished in colour. Smitable for 2 ft. thelitte rails only. Each 6 6.

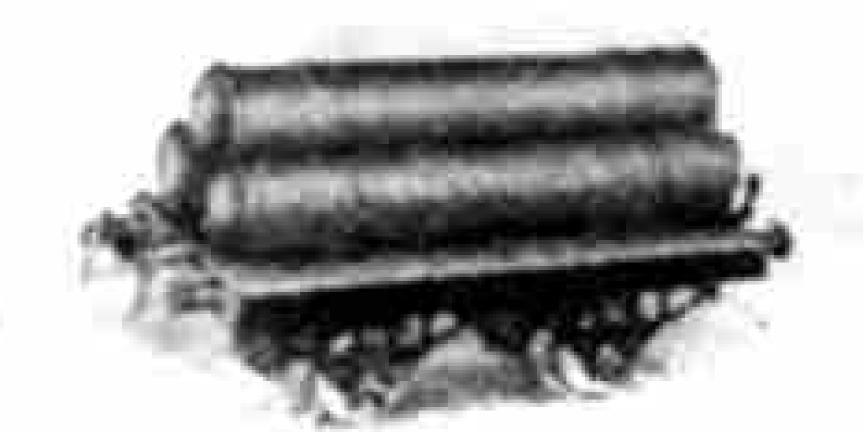

GAS CYLINDER WAGONS inished in red, lettered gold.

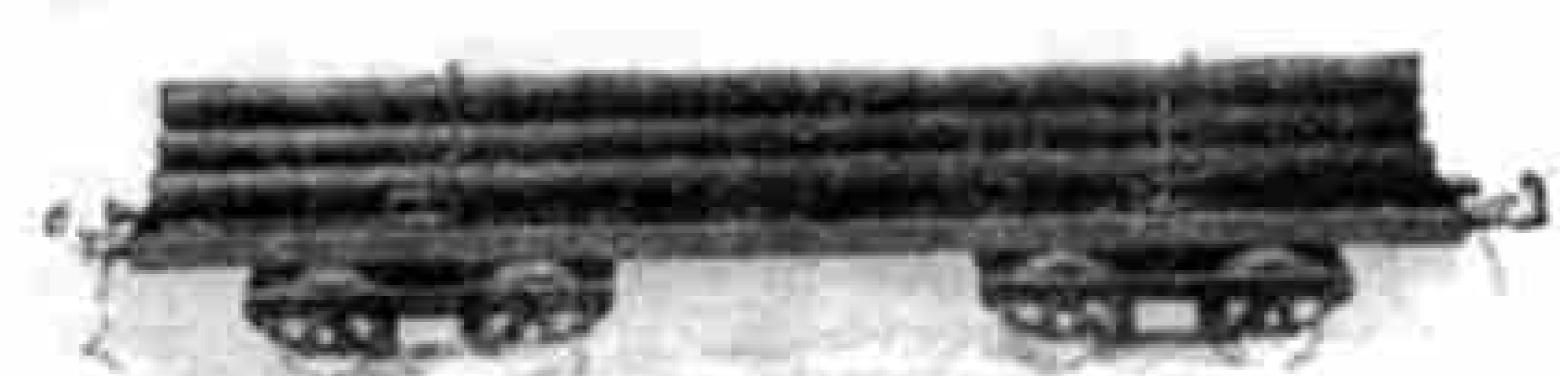


No. 2 LUMBER WAGONS

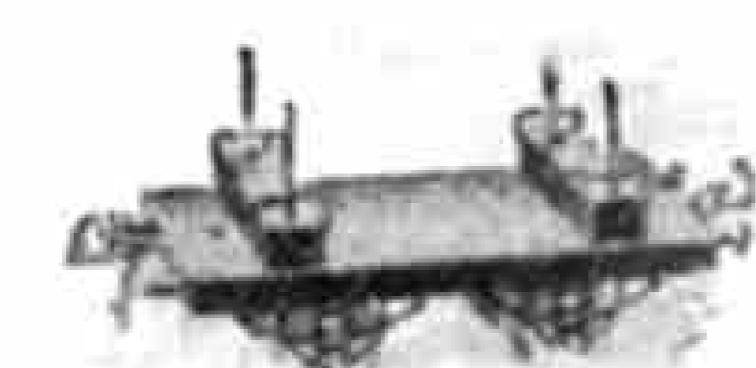

No. 1 LUMBER WAGONS



SPRING BUFFER STOPS. Each 2/-

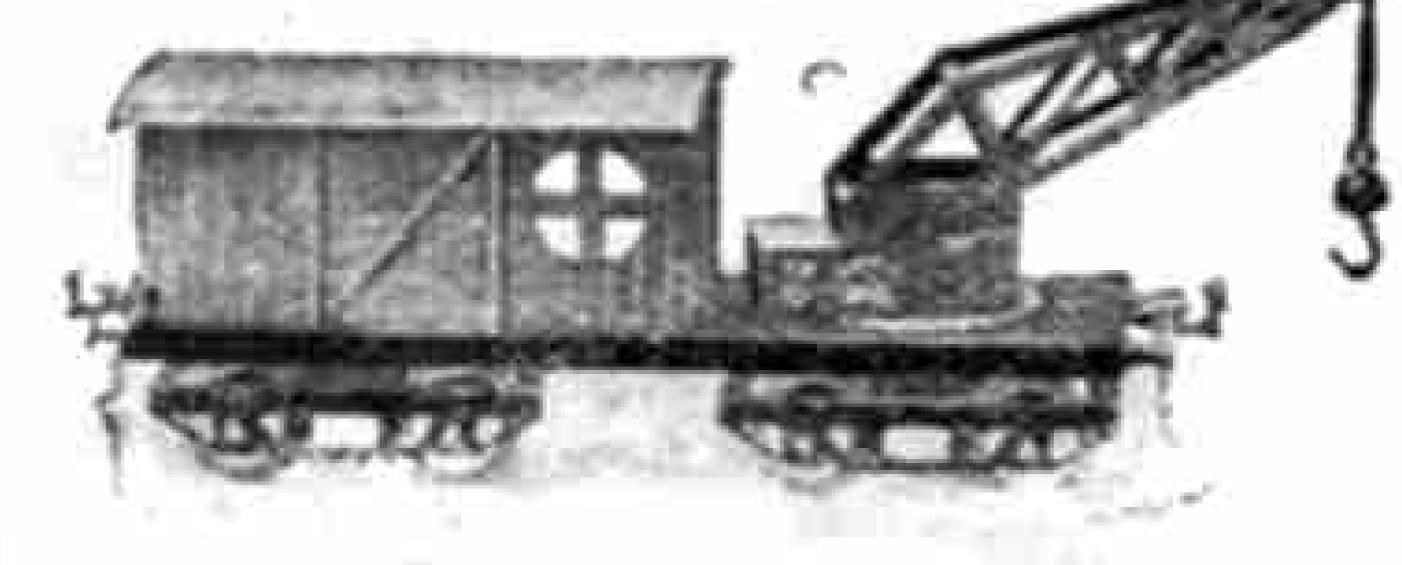


BREAKDOWN VANS AND CRANES Excellent finish. Beautifully coloured. Smitable for 2 It. radius rails only. Each 7/-



No. 1 TIMBER WAGONS Beautifully enamelled in colour and stoyed. Each 2/-



No. 2 TIMBER WAGONS Beautifully enamelled in colour and stoved. Suitable for 2 ft. radius rails only. Each 5/6

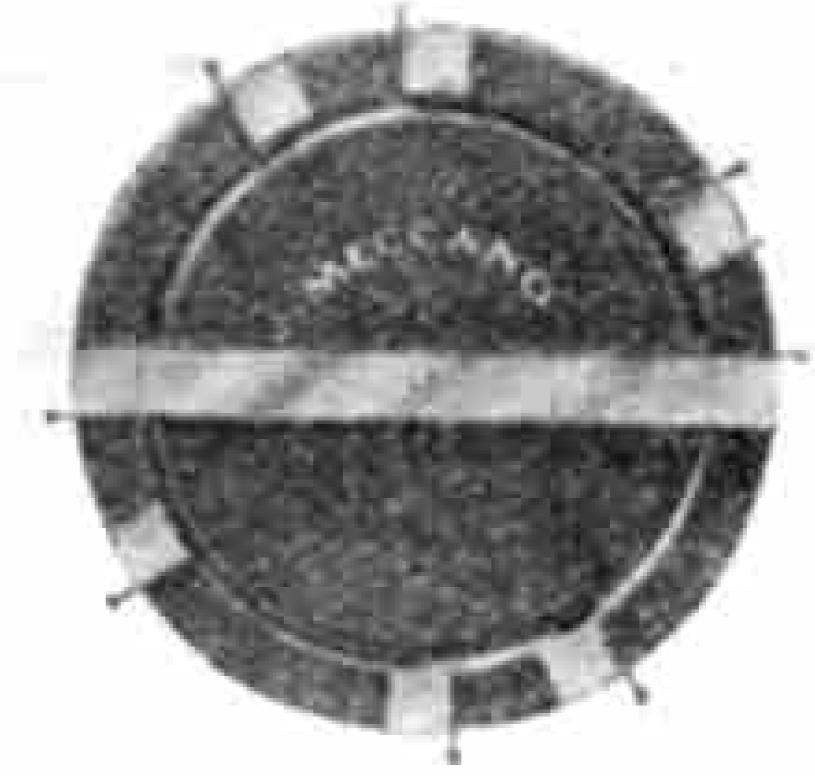


TURNTABLES. Each 4/6




ROTARY TIPPING WAGONS Finished in colour. Each 3/6



SINCLE LAMP STANDARDS four-volt bulb may be fitted into the globe.

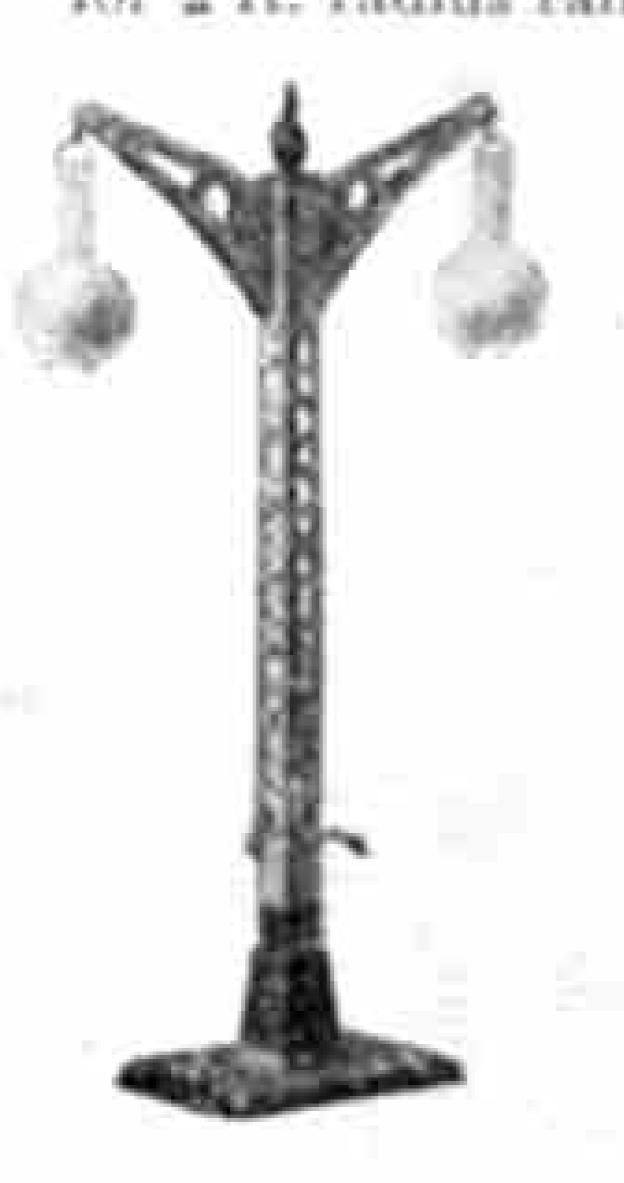


DOUBLE LAMP STANDARDS Four-volt bulbs may be fitted into the globes. Each 4/-

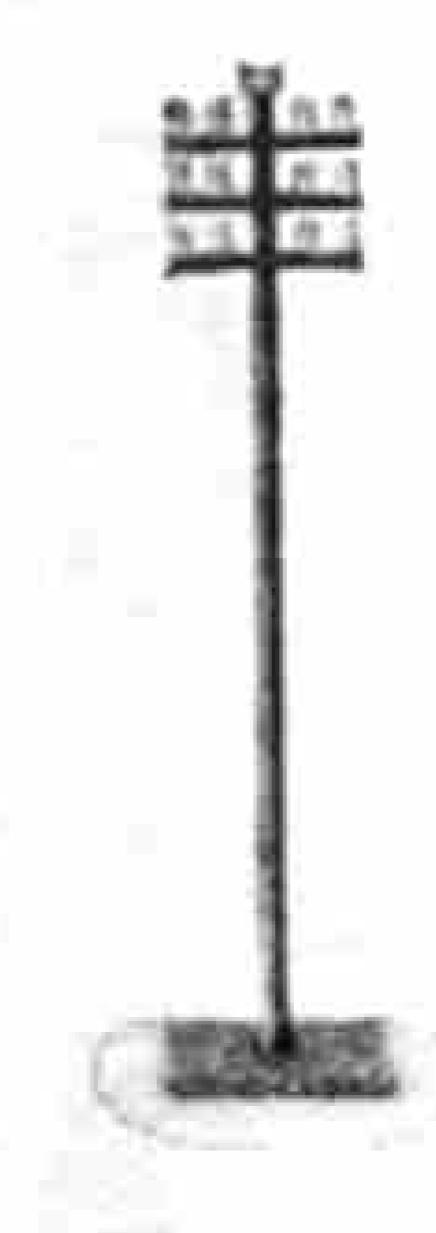

TELEGRAPH POLES



F LOADING GAUGES Each 1/9

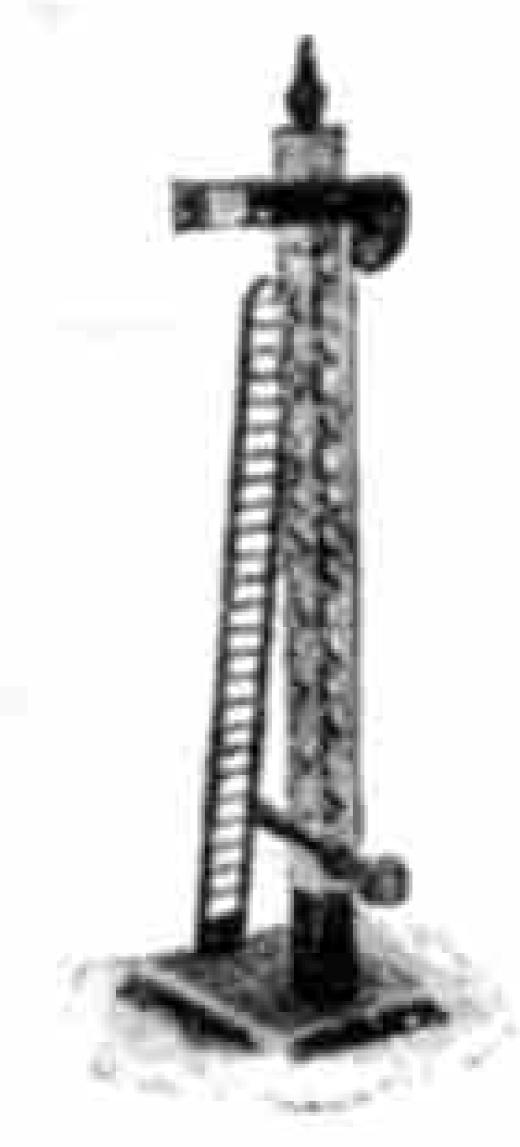

SIGNALS Each 2/6

MECCANO LIMITED


BINNS ROAD

LIVERPOOL



Into the Land of Fun

"SPANNER."

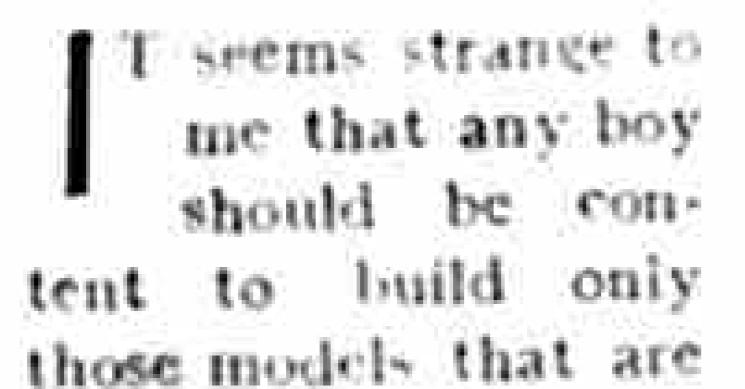


shown in the Meccano Manuals. Yet I meet many such boys in my travels, and I always think that they are missing more than half the fun of Meccano. sometimes wish I could take these boys over to Liverpool, and show them the wonderful model building room at the Meccano factory. I'll warrant that my young triends would be so inspired that they would return home and build a new model every day for the remainder of their lives!

mentioned this matter to Mr. Hornby on the last occasion that I was over at Liverpool. His reply was so interesting that I made a note of it.

"Yes," he said, "it is as you say many boys do not realise the wonderful possibilities of the Meccano system. We illustrate in our Manuals only a small number of the models that may be constructed with each Outfit. We show representative types, as it were, and leave it to the Meccano boy to build others. Come with me!" saying which he led the way to the model-room.

" Here." he said, indicating hundreds of models. " are some of the experimental models we have built during the past twelve months. From them we have selected a number of representative types for inclusion in our new Complete Manual. Every one is a splendid model, and we should like to include them all, but what can we do? Our Complete Manual

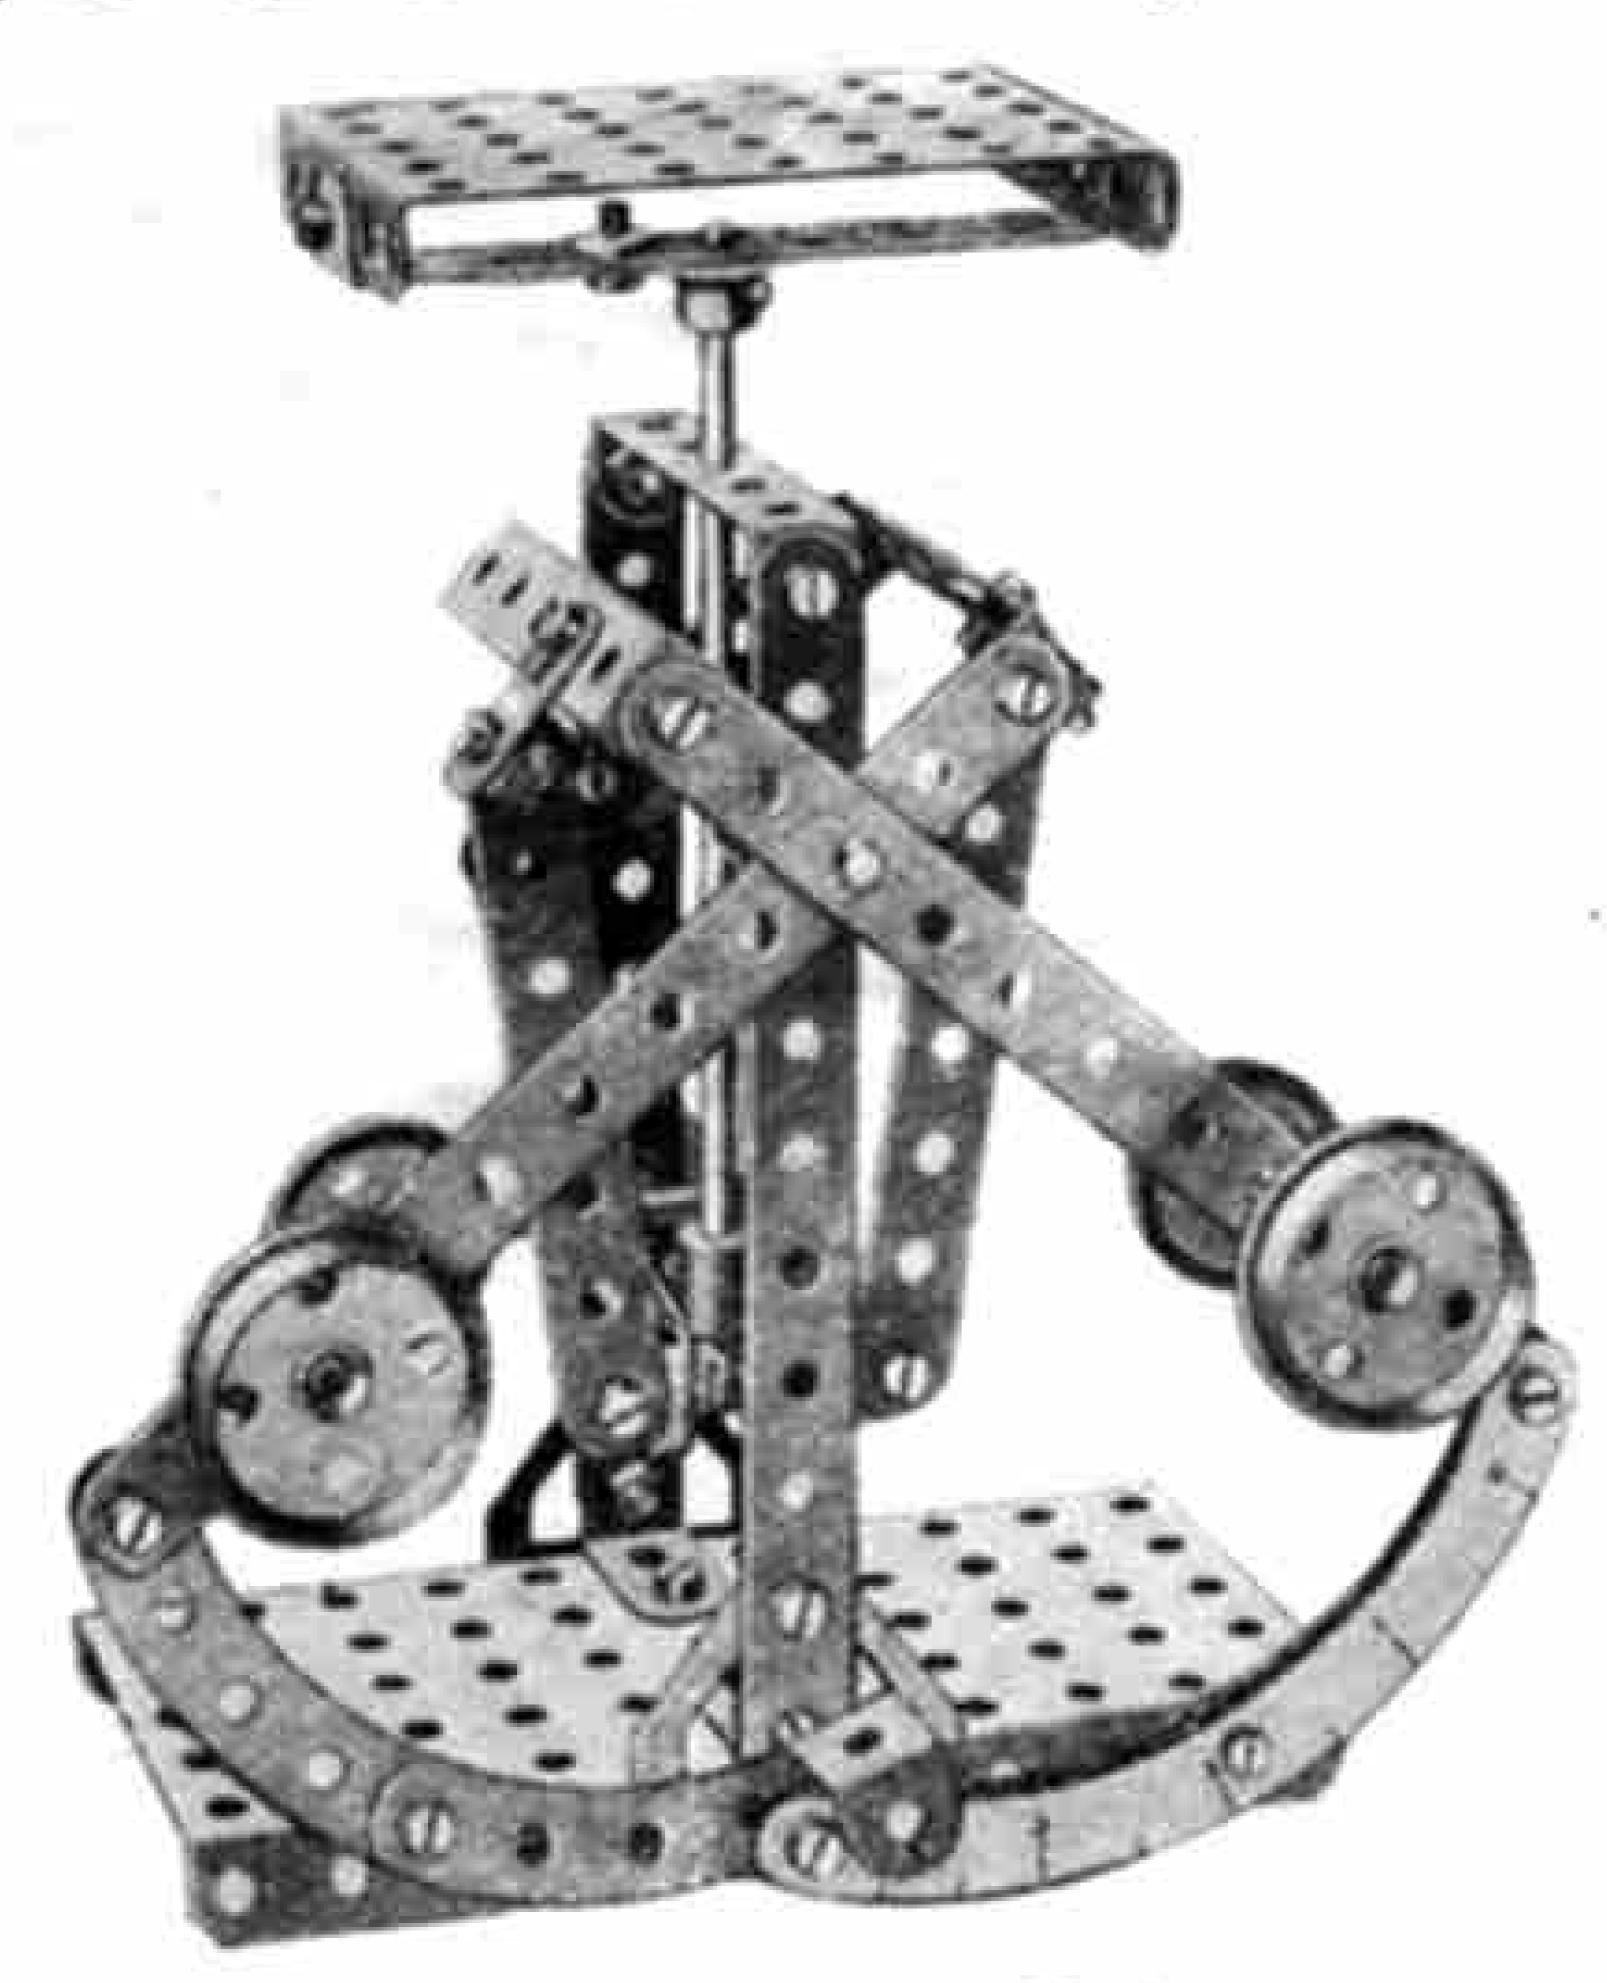

Letter Balance Model 306.

already illustrates nearly 400 models, and it is really quite impossible to include any others on account of the lack of space. If we were to show all the models that can be built with Meccano we should require a manual with 10,000 pages!"


I quite agreed with Mr. Hornby, but I could not help feeling sorry that all Meccano boys could not see the rows and rows of splendid models that stood before me-Cranes, Bridges, Derricks, Dredgers, Guns, Motors, Engines, and a host of others too numerous to mention. "Tell your Meccano boys," concluded Mr. Hornby, "that if they use their brains they can build hundreds of models not shown in any of our Manuals, and from them they will obtain any amount of pleasure."

It struck me after leaving the factory that the prize-winners in the £250 Model-Building Competitions were the boys who had used their brains in the manner Mr. Hornby suggested, and I pictured to myself what wonderful fun these prize-winning Meccano boys must have had thinking out the new modelsmodels which in many cases differ entirely from any of those shown in the Meccano Manuals.

I think that one of the greatest charms of the Meccano system lies in its never ending variety. There is no need to build the same things over again,

and to the Meccano boy of ability and intelligencethe boy who wishes to "get on" in the worldthere is nothing so pleasurable as inventing some new model or improving an existing model. There is so much scope for such a boy, for he has "the whole world to go at," as the saying is. Of course, in the more complicated models a greater number of parts are required, but these may be added to existing Outfits from time to time, or an Accessory Outfit may be purchased, converting the original Outfit into the next higher and so making possible a large number of new models.

Perhaps one of the finest examples of the eleverness and resource of a Meccano boy is shown in the Oscillating Steam Engine (Model No. 307). The original of this model was built by a boy a fortnight after converting his No. 2 Outht with the addition of a No. 2a. The model is composed of ninety-nine

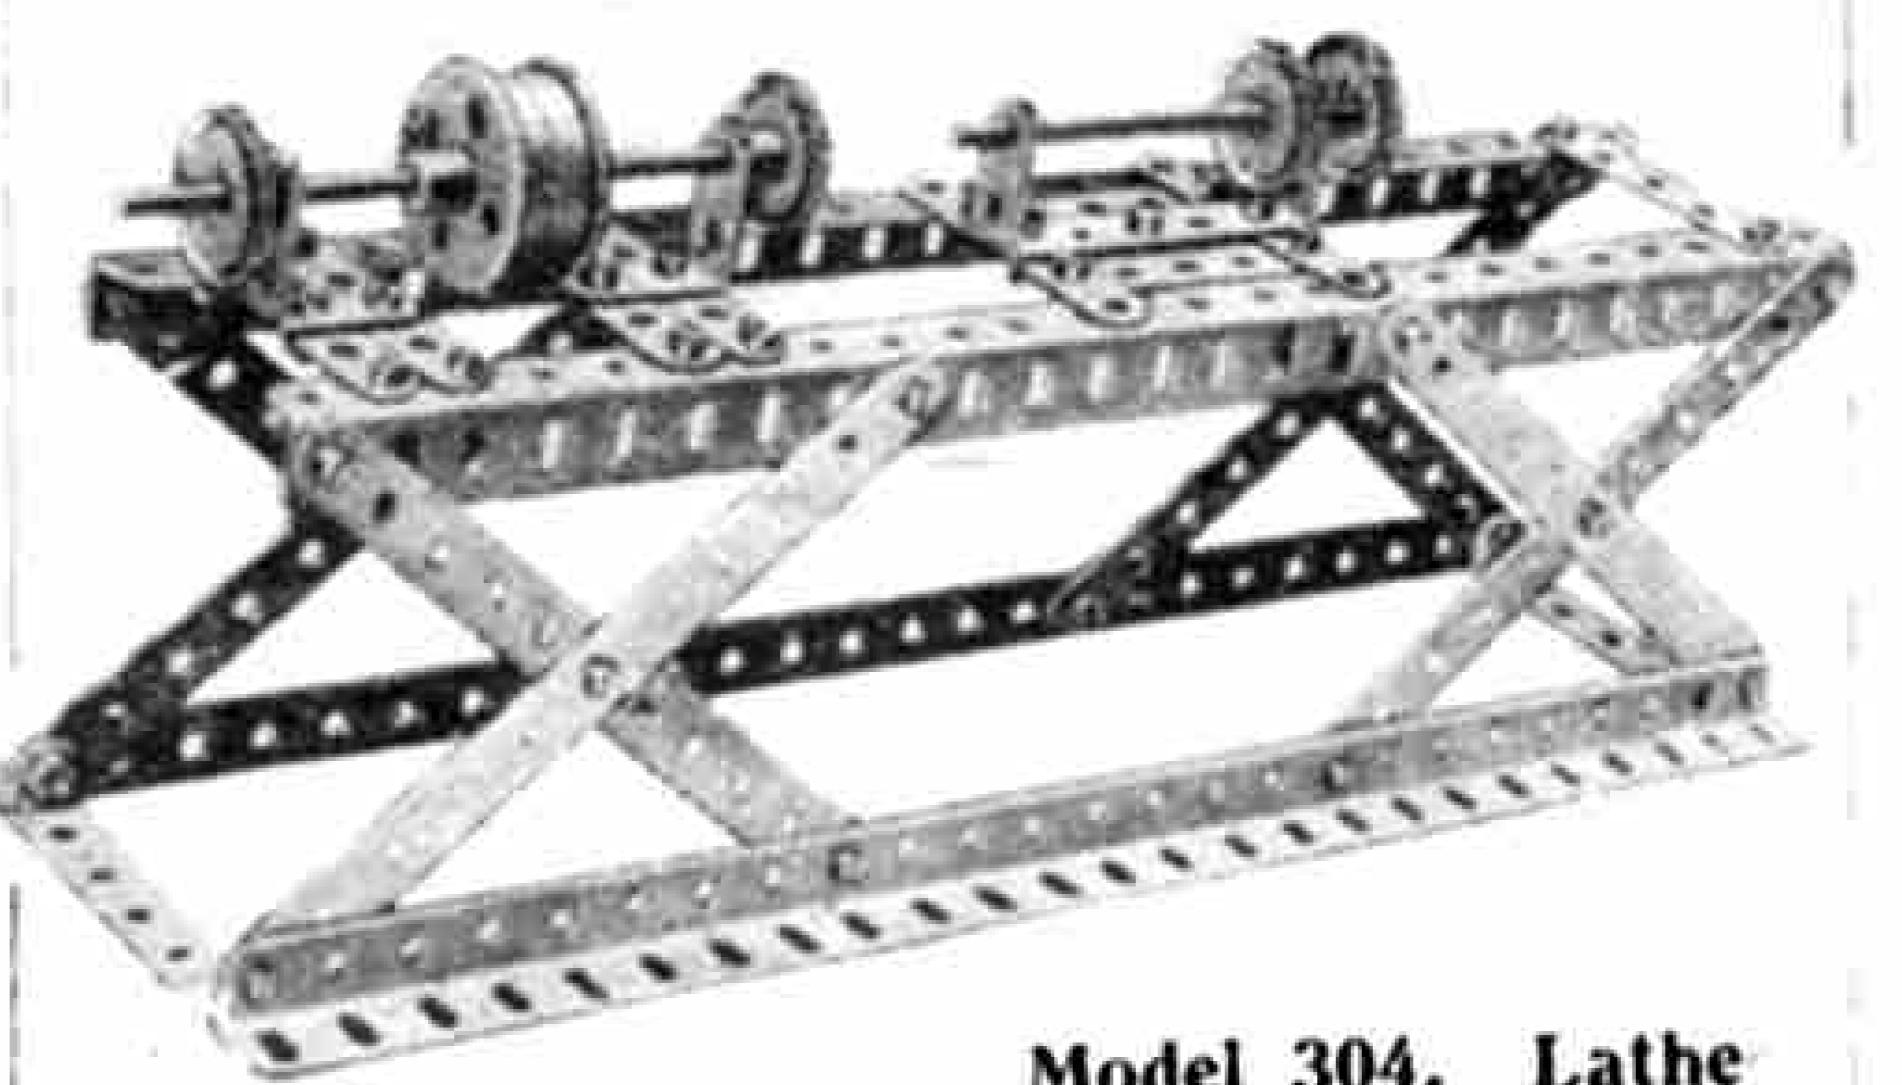


Model 304. Lathe

parts and is an accurate copy of this type of engine. When the oscillating steam engine is made to work, by turning the crank handle, the piston rods drive up and down in the cylinders in a very realistic manner. I have been told that before being published in the Manual, the original model was only slightly improved by the model-building staff at the Meccano factory. For instance, advantage was taken of a new part, the Fork Piece (No. 116), which came in very conveniently for use in the piston heads, where they join the crank-shaft.

Another model that is both interesting and useful to those possessing a No. 3 Outfit is the Letter Balance (Model No. 306). In the illustration the arms of the Balance have been fixed wide apart to show the construction of the model. In practice, however, the two flanged wheels should be touching until a weight is placed on the balance, when the curved strips open out and the double bracket piece shows the weight registered.

In the construction of this model a new and muchneeded part will be found useful. This is the 31" x 21" perforated flange plate (No. 53) that forms the top of the balance. This part is first met with inthe 2a Outfit.

It is often surprising to me to find how the addition of only one or two extra parts to an Outfit immensely widens its building scope. This is chiefly due to a principle that Mr. Hornby has discussed on more than one occasion. This is

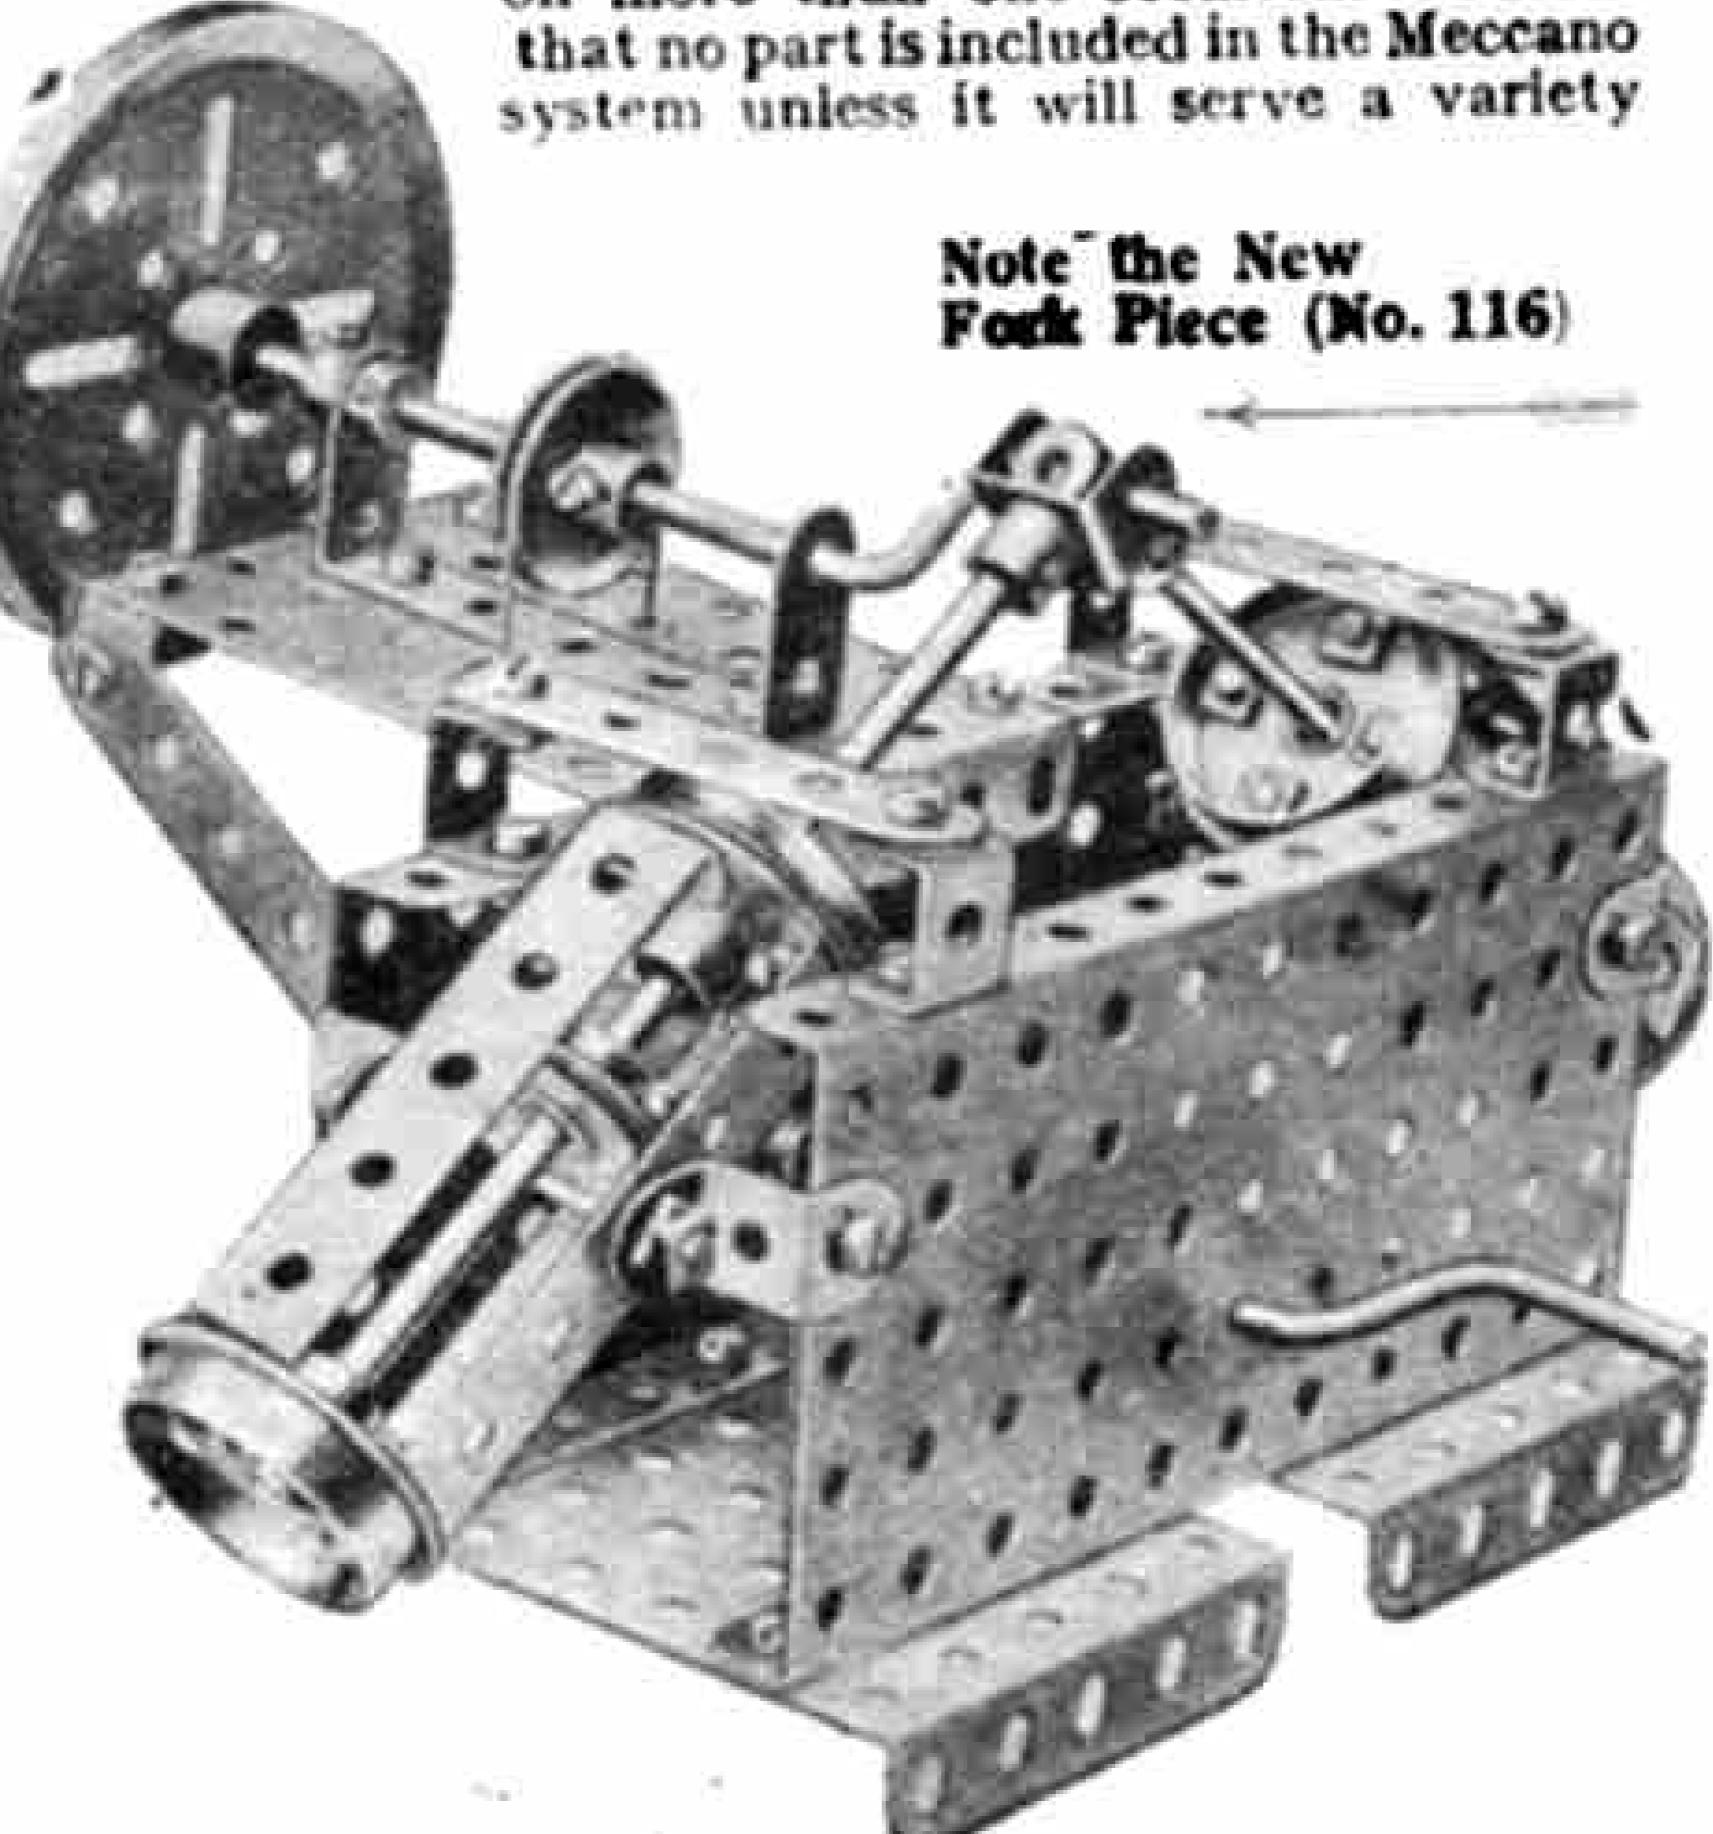

Oscillating Steam Engine Model 307.


of purposes and is applicable to several different models. Thus the Worm Wheel (No. 32), the Double

Angle Strips (Nos. 46 and 48b), and the 11" Pulley Wheel (No. 21) included in the 2a Outfit will, later on, be found indispensable in building many of the more advanced models.

Another type of balance (Scales, Model No. 343) may also be made with a No. 3 Outfit, and is an interesting model, if only because an entirely different principle is employed to that of the Letter Balance. The Scales are very simple to construct and the counterpoise weights, for which flanged wheels are used, are screwed on to a 5 axle rod (No. 15). Incidentally, it is very interesting to notice the great variety of purposes for which the flanged wheels may be used. For instance, in the four models illustrated on this page they are used respectively as weights, lathe-pulleys and cylinder heads. There are, in fact, very few models in which these handy wheels may not be employed in one capacity or another.

A model that gives a very good idea of the general working principles of a lathe is Model No. 304. This is an example of a simple form of lathe, such as is used in big engineering shops for turning metal, screw-cutting, boring and a number of other purposes.

Each of these four models, and the four described last month, are only a few of the very many illustrated in the new Complete Manual, a special section of which has been devoted to models that may be constructed with a No. 3 Outfit.

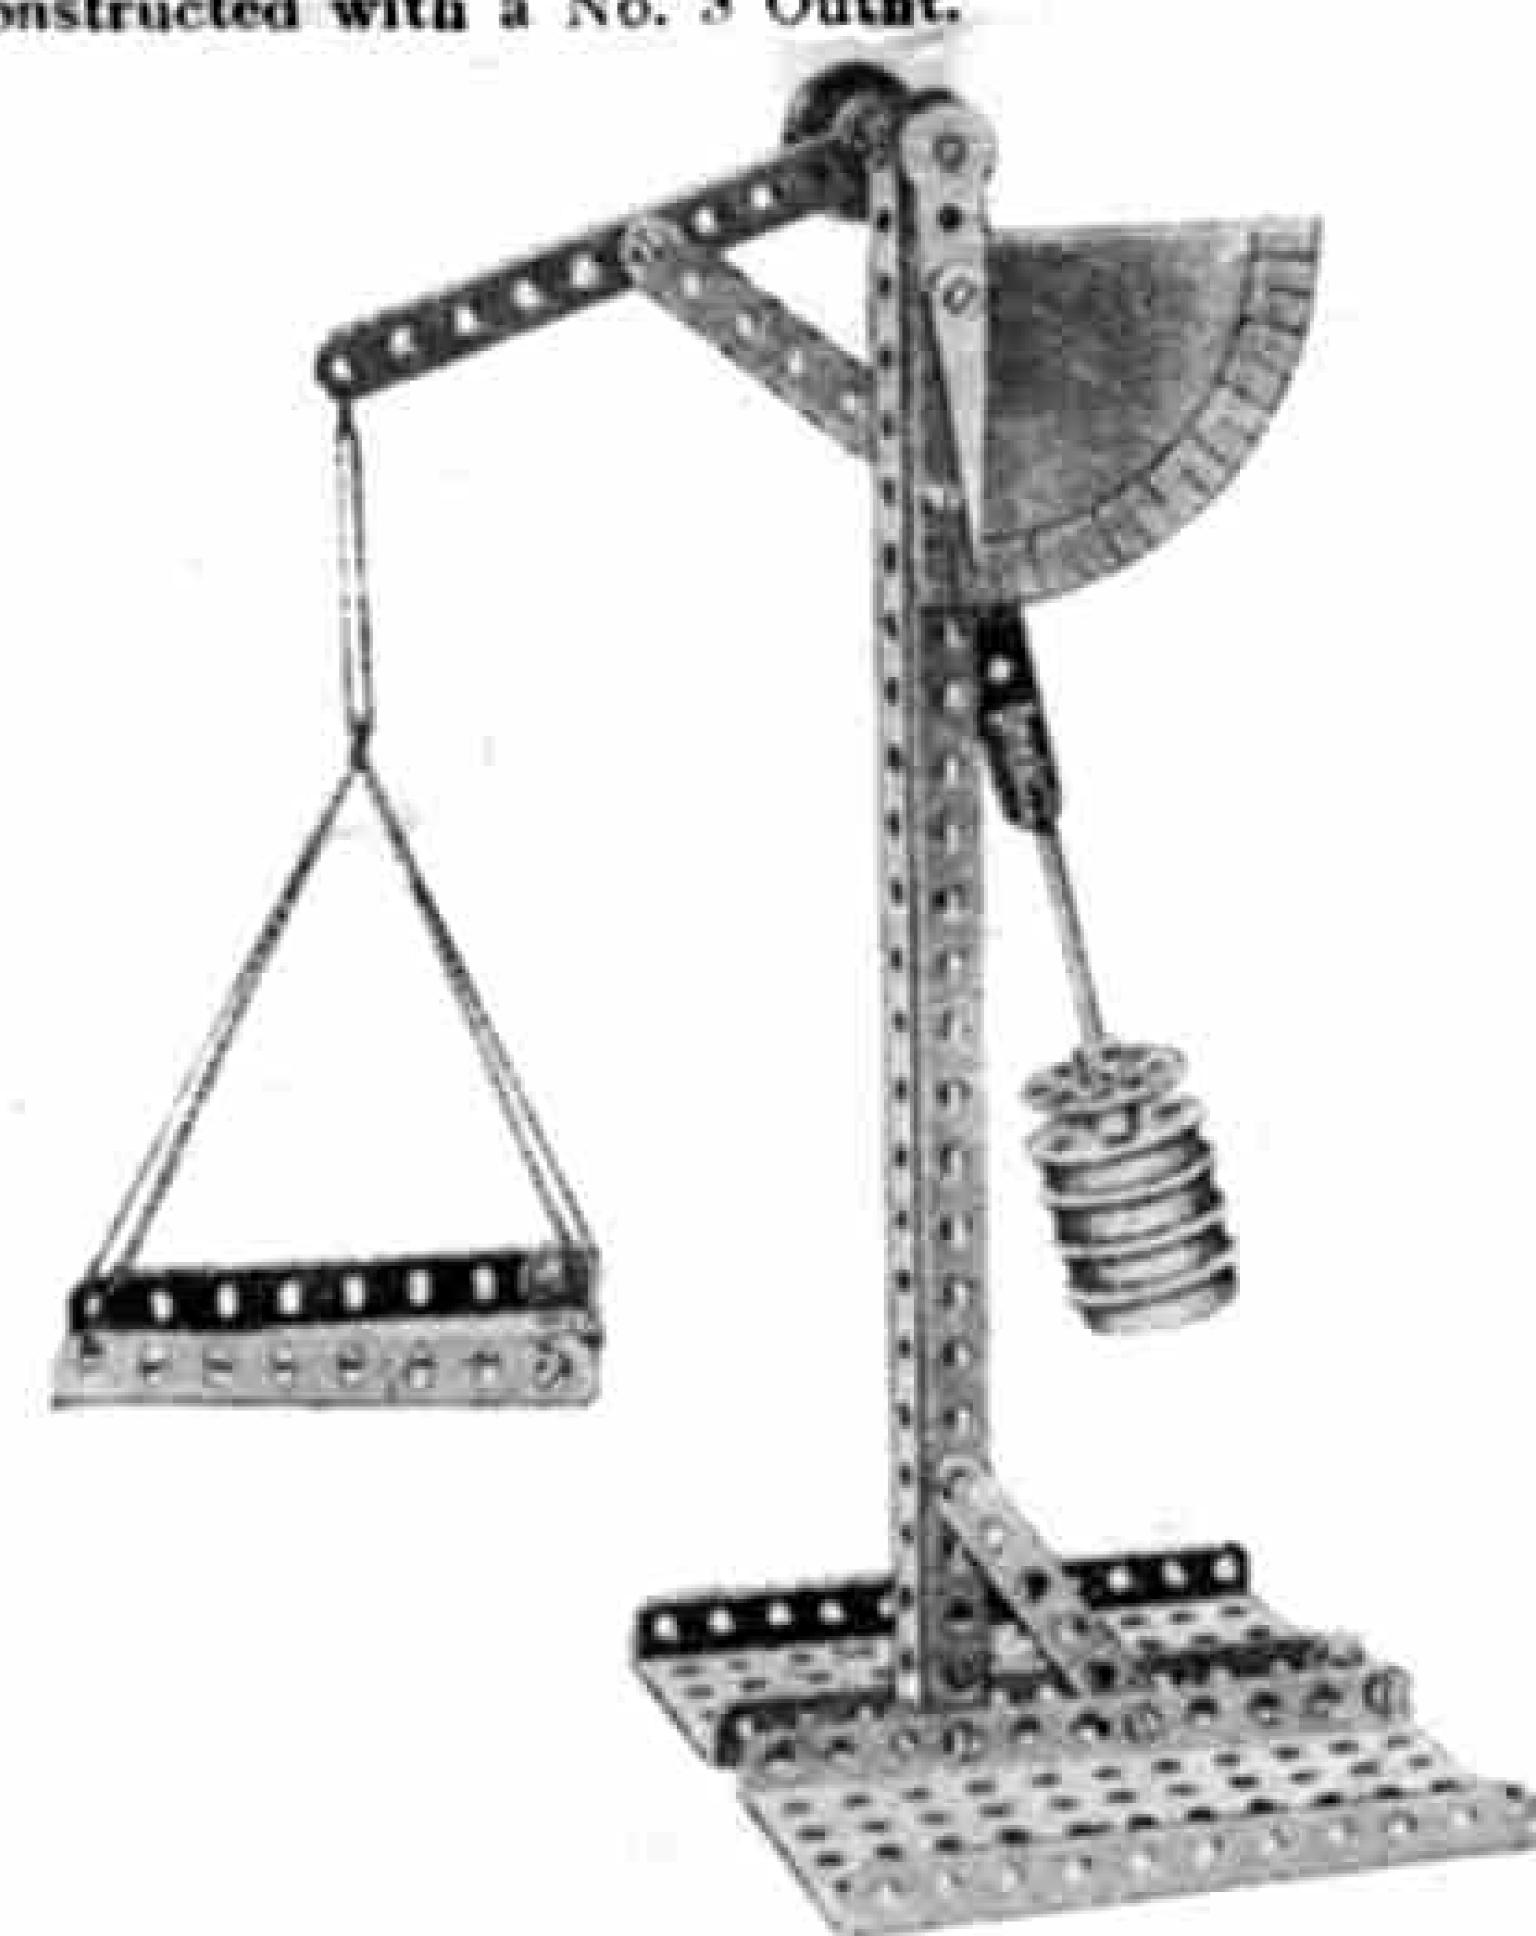


Model 343. Scales


Incidentally, I should like to take this opportunity of congratulating those responsible for the system of numbering followed in the new Manuals. All models that may be made with a No. 2 Outfit, for instance, fall between the numbers 200 and 299. Models for a No. 3 Outfit are numbered 300 etc., No. 4, 400 etc., and so on. Thus it may be seen at a glance what Outfit is required to build any given model, by simply noting the first figure in its number. This saves a great deal of labour looking up the models, as was necessary under the old arrangement.

May I also take this opportunity of saying that very much prefer the new type of illustrations in these Manuals, adopted for the first time last year. believe these illustrations are printed by what printers technically describe as the "half-tone process." At any rate, the new method clearly shows all the component parts of the models and makes model-building very much easier. As I remarked last month, the Manual should be in the hands of every Meccano boy.

Interesting No. 4 Models.

Unit No. 1 (complete)

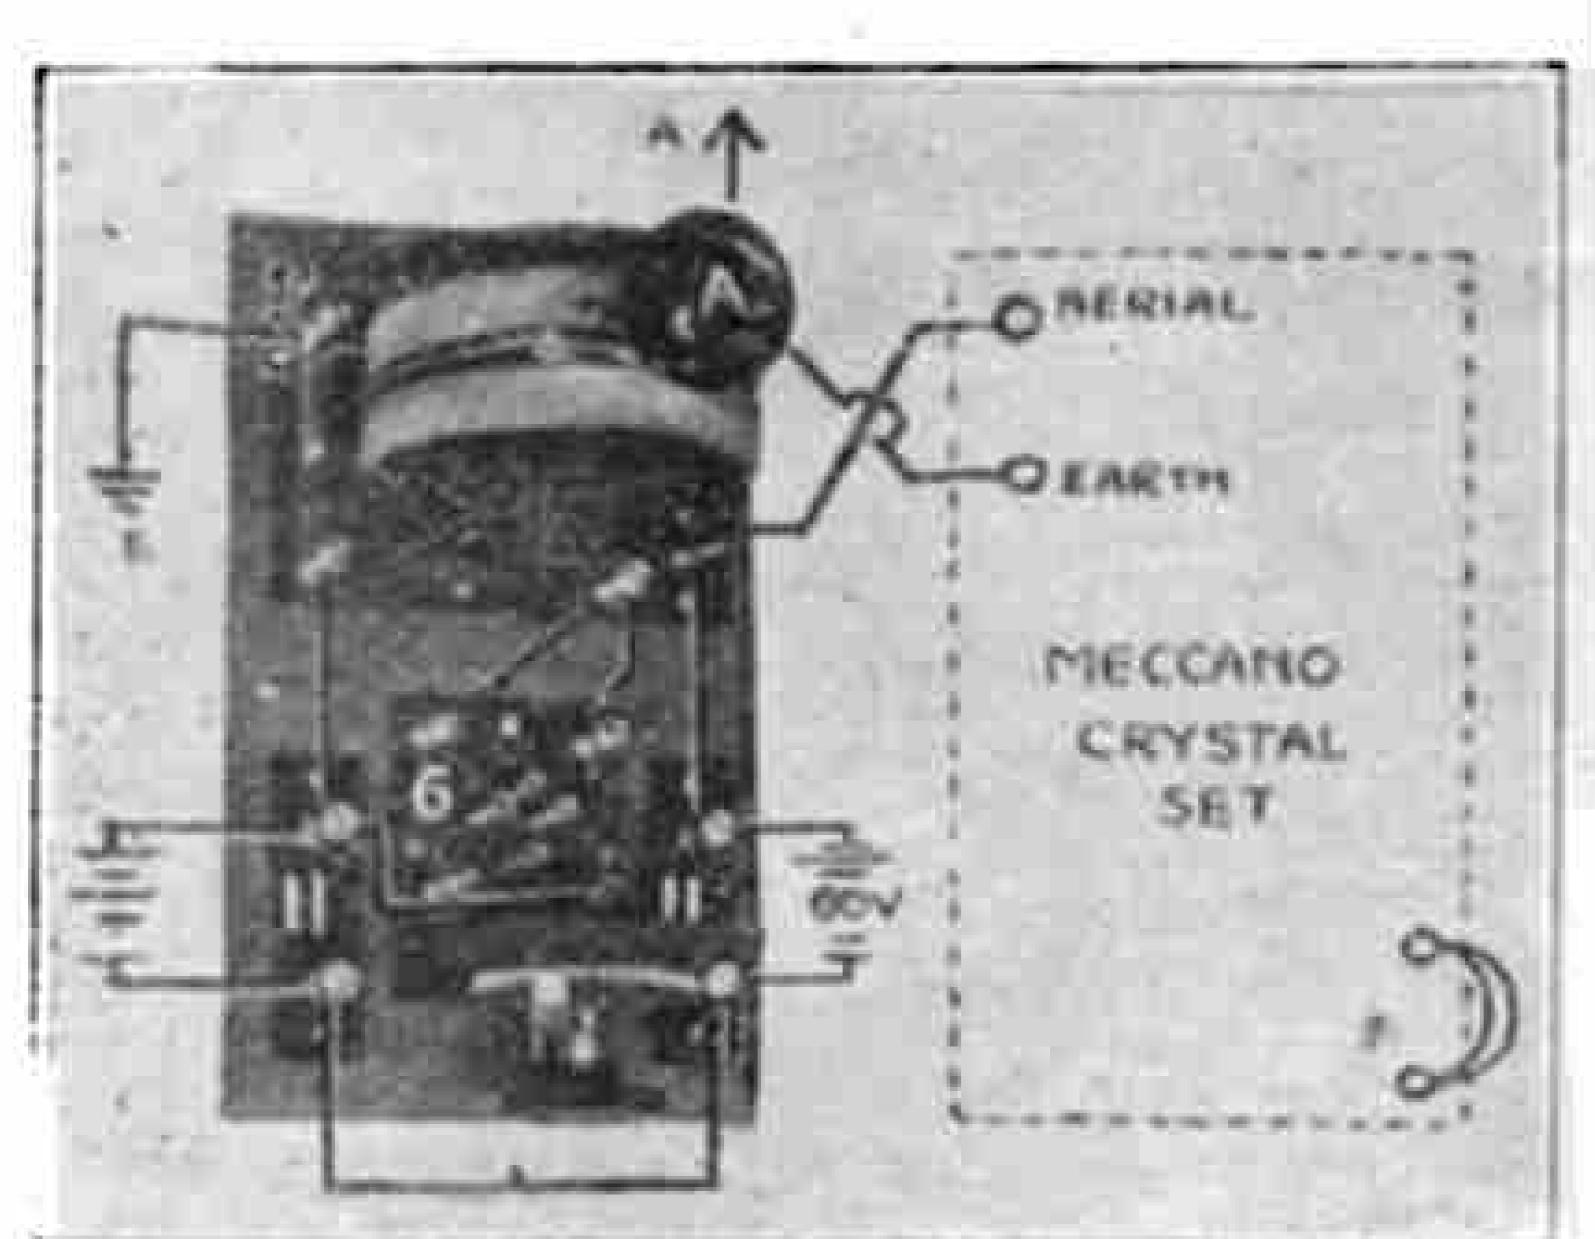


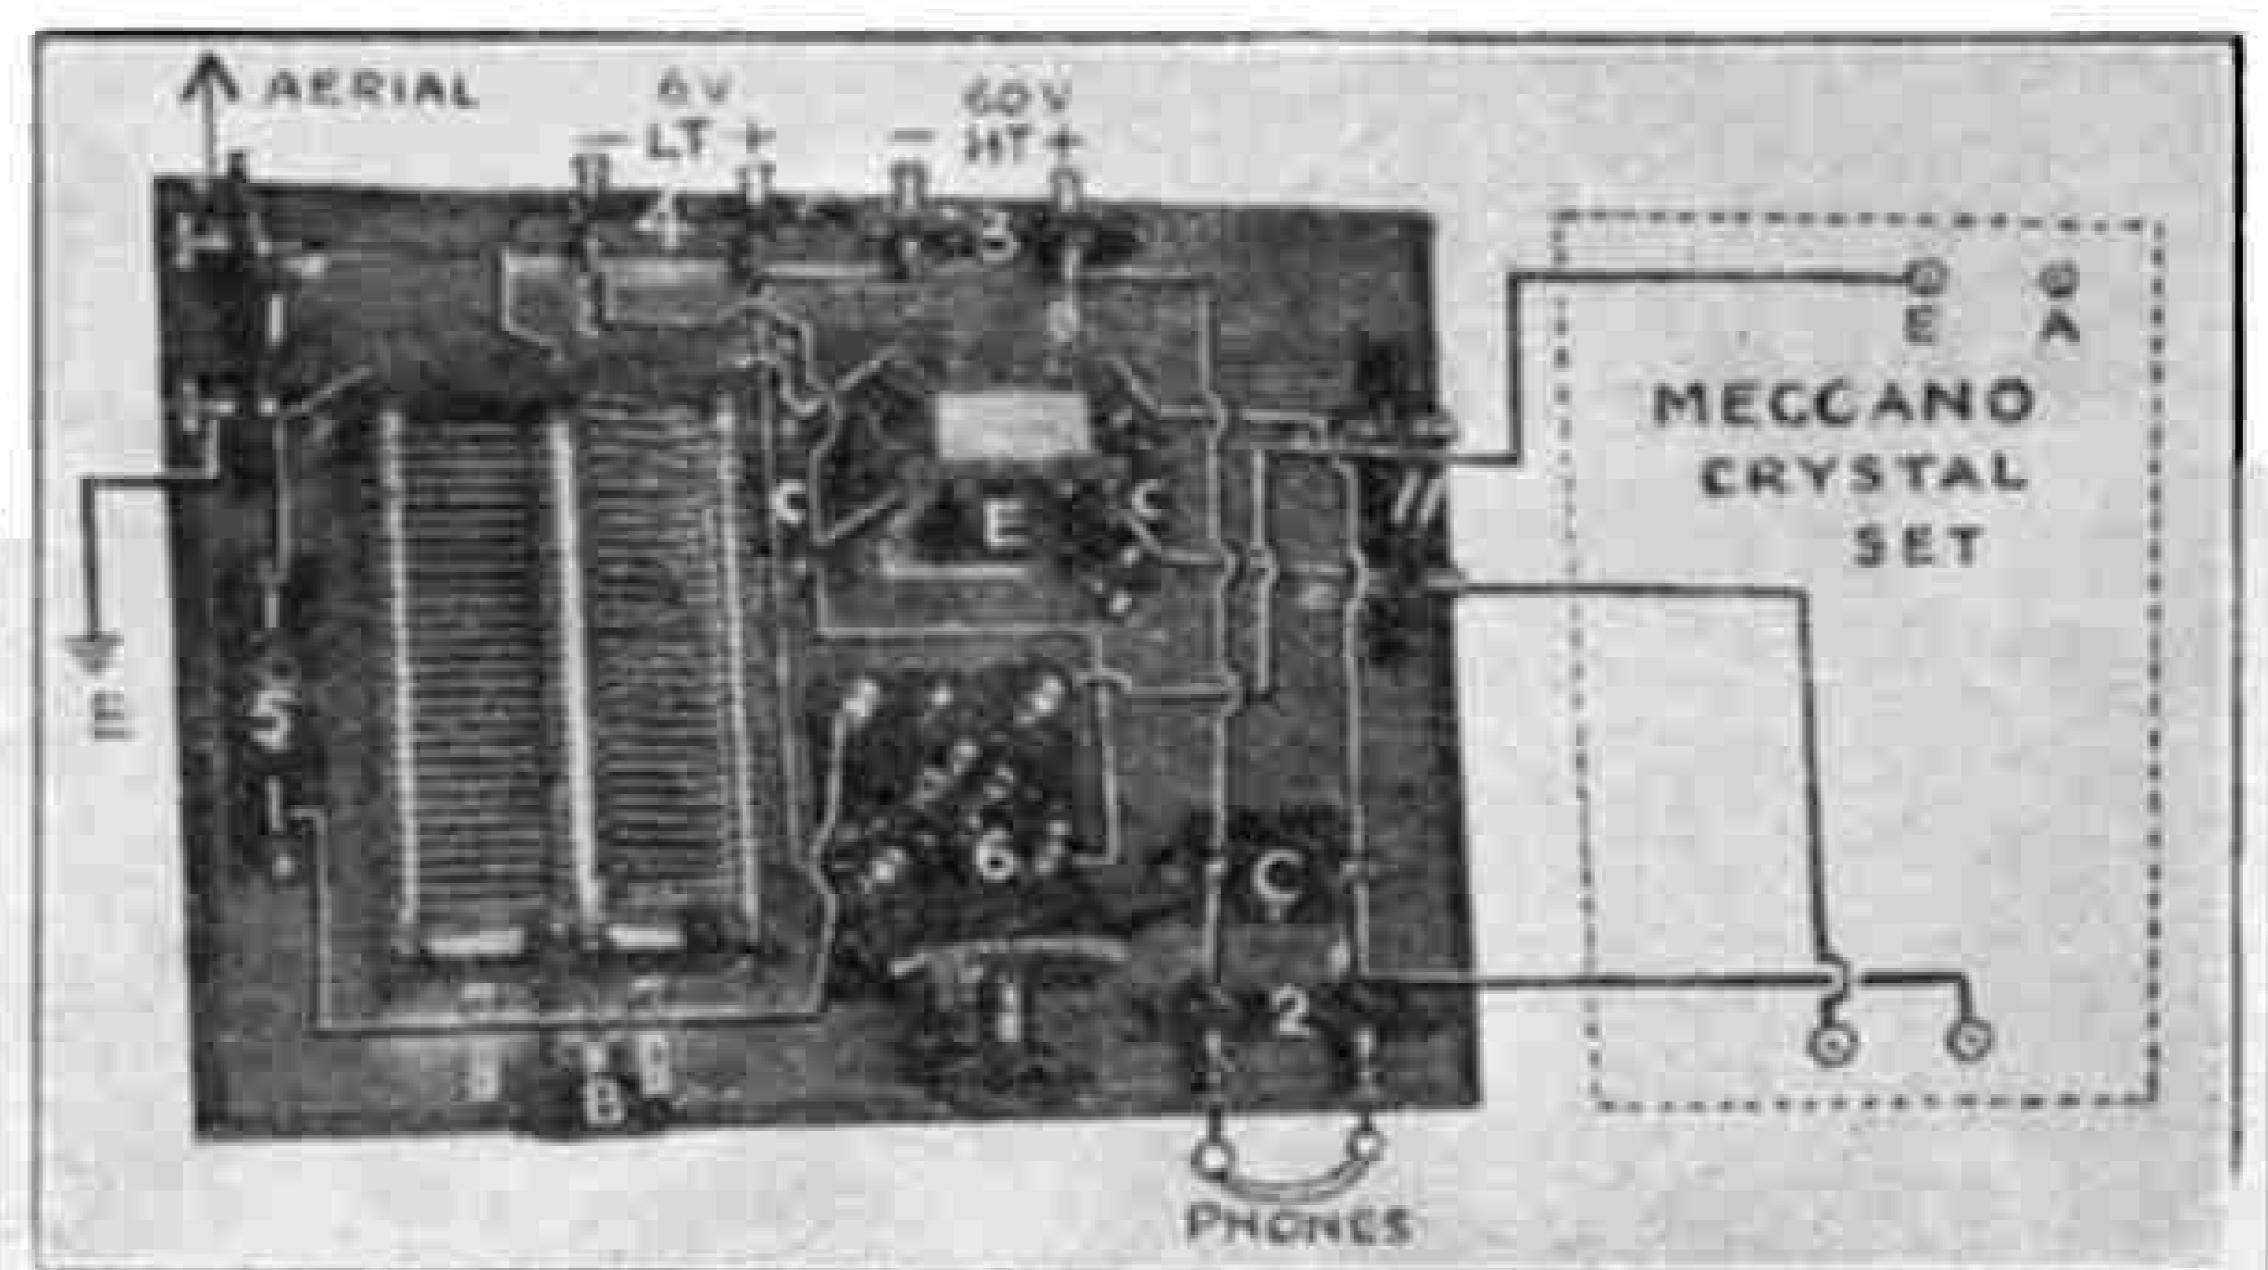

Unit No. 2 (complete)

Unit No. 3 (complete)

THE RESERVE AND ADDRESS OF THE PARTY OF THE

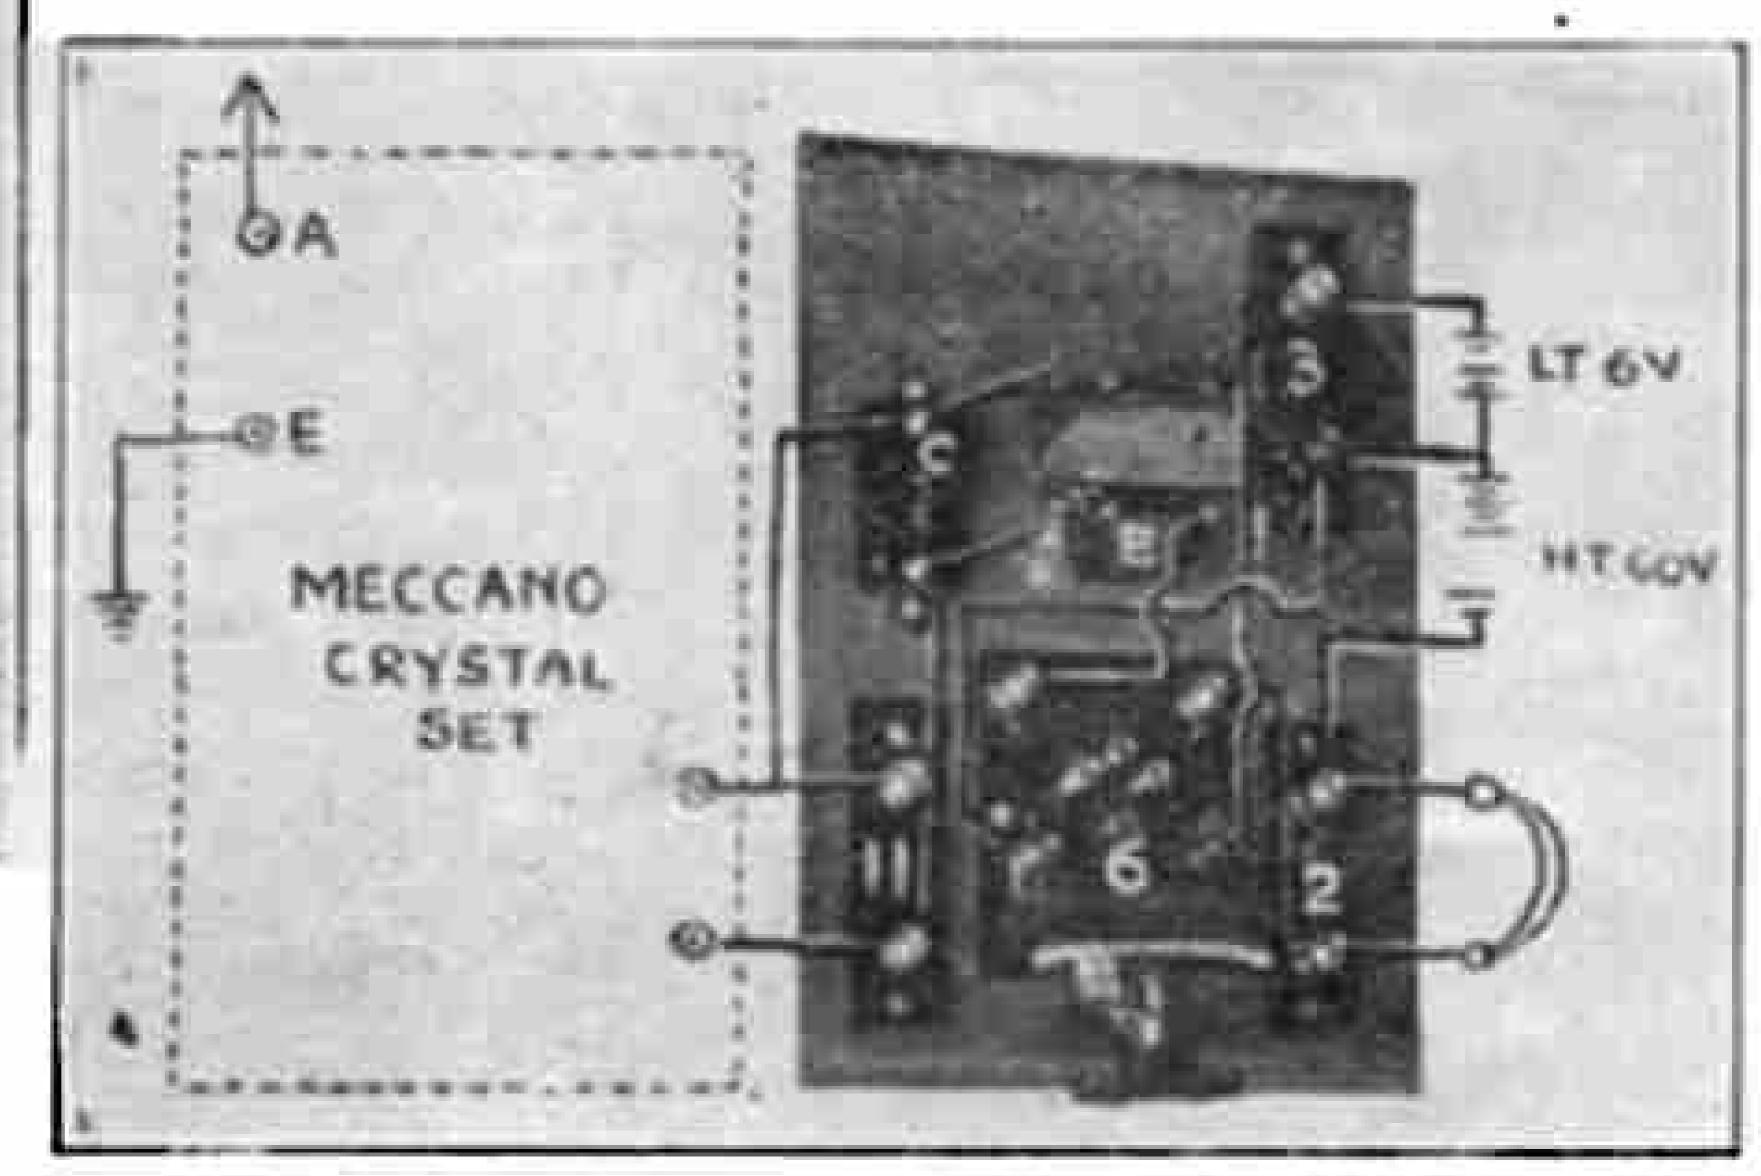

u you nave a

MECCANO CRYSTAL SET

here are three ways of improving it

TO INCREASE ITS RANGE (See Unit 1).

As you know, boys, the Crystal Set is not much good for long distance work, although for use within 20 miles from a Broadcasting Station it gives splendid results. But there is a way to increase the range of the excellent Meccano Set to as much as 70 or 100 miles—even more under favourable circumstances—and that is by using a Valve in front of it.

Look at the illustration above, and note how easily with only four components you can build up Unit No. 1 and increase the range of your Set at least three times.

TO MAKE IT LOUDER

(See Unit 3)

No Crystal Set gives sufficiently loud speech to work a Loud Speaker, and as most of you at some time or another will want your friends in to entertain this way, we show you in Unit No. 3 how you can add to your Meccano Set an Amplifier which will give you speech five times as loud. For this Unit you only require components No. 2, 3, 7, 11, C, E, nothing could be casier.

AND KEY TO PRICES PHOTOS 1. A and E terminal 2. TEL terminal strip 3. HT terminal strip LT terminal strip 5. Single coil holder Socostat (combined) valve holder and filament resist-11. Output terminal strip 9d. A. Variometer .001 Variable condenser (assembled)9/-.001 fixed condensers 1/6 E. Max-Amp. Trans-...18/6 former Rubber-covered connecting 2jd. per yd. wire H. Fixing Brackets

1 d. each

INCREASE ITS RANGE AND MAKE IT LOUDER AT THE SAME TIME

(See Unit 2)

This method is a combination of Units No. 1 and 3, but only one Valve is used. The Circuit used in this set is known as a Dual Amplification Circuit, and is very similar to the famous "P.W." Circuit which you have no doubt read quite a lot about in "Popular Wireless."

Here again, you will be able to see by the illustration, exactly what components you need, but if you have any doubt, write to us and we will be pleased to

tell you more.

VALVE HOLDERS


Can be used also for

carrying transformers,

solid ebonite ... 1/3



SEND TO-DAY FOR THIS BIG CATALOGUE Send to-day for a copy of our big 40-page Cataloguethe largest in the Trade. Fully illustrated, post free 3d.

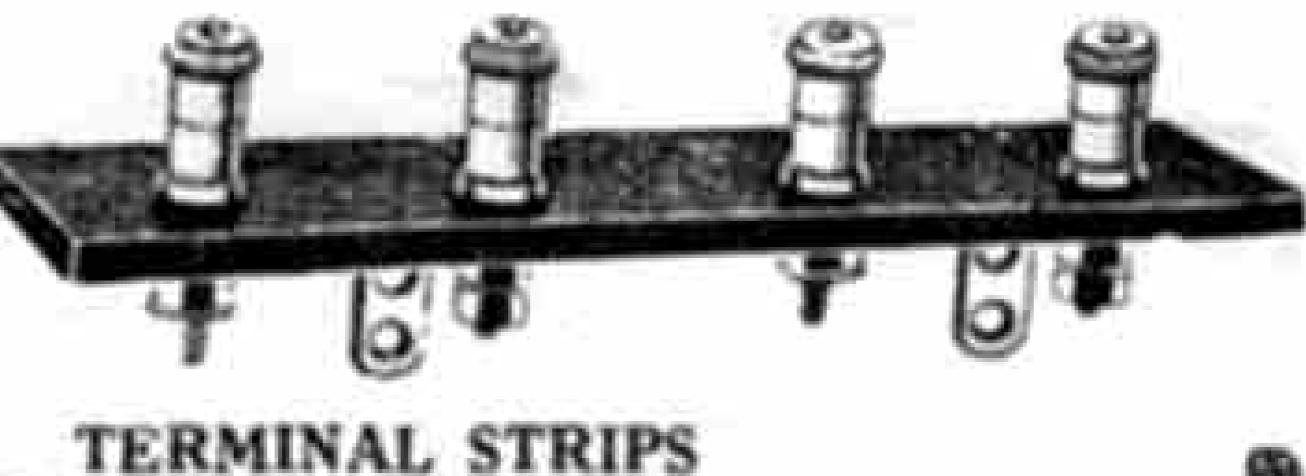

Sold in strips of 2 or 4. Engraved + HT-, +LT-, PHONES, price 8d. per pair of terminals. Ditto, minals throughout, 9d. per Large ditto, engraved Aerial and Earth, Per pair 10d.

COILS

290-390 mtrs. 2/-

3 420-650 .. 3/-4 570/900 .. 3/6 5 780-1140 .. 4/-


No. Wavelength

2 340-470




Enables coil to be moved through an angle to give coupling effects

SWINGING COIL HOLDER

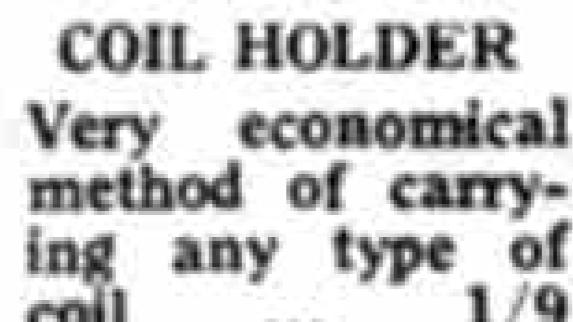



@ Please enclose postage for all orders under £2

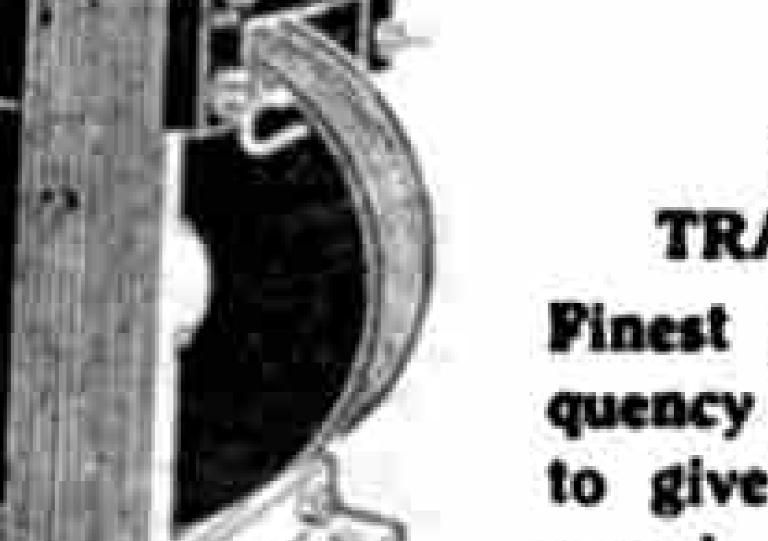

MAX-AMP. TRANSFORMERS

Pinest quality Low Frequency Transformer made to give wonderfully loud speech without a trace of distortion 18/6

Peto-Scott Co. Ltd.,

Head Office: 64, High Holborn, W.C.1.

Branches :

LONDON: 99, High Holborn, W.C.1. 3, Wellington St., Strand, W.C.2.

CARDIFF: 94, Queen Street. LIVERPOOL: 4, Manchester St. A Talk about Aerials

BY THE RADIO EDITOR

These articles describe the best type of aerial to erect and give suggestions for the erection of different aerials. When you have put up your aerial and connected to it your receiver you will be able to listen all night long to all manner of good things from the nearest broadcasting station. There need be no more dull evenings, and you will be able to entertain your friends by allowing them to listen-in.



important part of a crystal receiving set, for unless it is absolutely efficient, signals will either not be received at all, or if they are received they may be so faint as to be almost unrecognisable. To be efficient, an aerial must be perfectly insulated, as high up as possible, and of as great a length as the regulations permit. Whether the type of aerial employed is T-shaped or L-shaped is a secondary consideration, height and length being of the greatest importance.

We all know that there are many difficulties in erecting an aerial. First of all there is a plan to be made, and this is, perhaps, the least difficult part of the business. Those boys who cannot have a straight span of, say, 40 ft. between two supports have to think out some alternative scheme whereby the necessary length and height may be obtained.

Next comes the question of erecting the poles that are necessary in the majority of cases. Permission has to be obtained from father or mother—or sometimes from both! If the poles are to be attached to the brick-work of the house, permission may have to be obtained also from the landlord.

Having obtained these permits and the poles, the next thing is to secure the latter in position. Here more difficulties

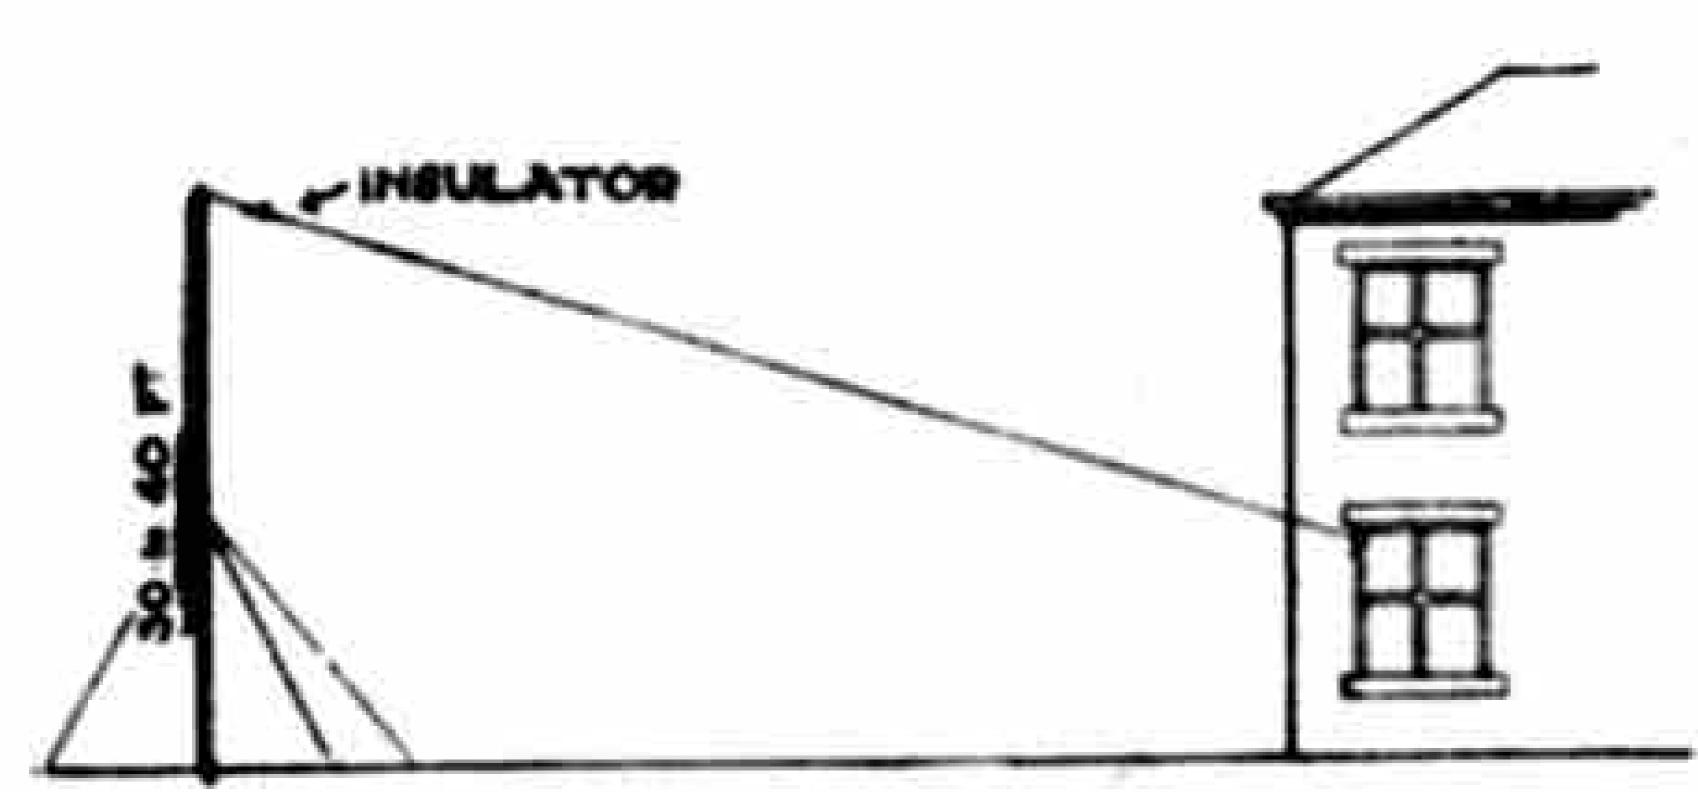


Fig. 1

may be encountered, especially if you get stuck on the roof with a 20 ft. pole in one hand and a hammer and staples in the other—then you really do begin to wonder who invented wireless, and why! Generally it is best to have the poles fixed by some local firm of builders, or by some handy-man." In some towns there are now firms who specialise in the erection of aerials, and their charges are generally quite reasonable.



Our illustration shows a very efficient aerial for both transmitting and receiving. The amateur to whom it belongs is fortunate in having been able to take advantage of a high water-tower near his house. The aerial is of the inverted "L" type

11.

Difficulties were

made to be overcome.

The ingenious boy will

not be prevented from


participating in the

joys of Radio because

of any difficulty in

erecting his aerial.

Although almost any kind of wire will enable signals to be received, a wire made of an alloy of copper—such as phosphor-bronze—is more susceptible to radio impulses than other metals. Even better is an all-copper wire. The wire

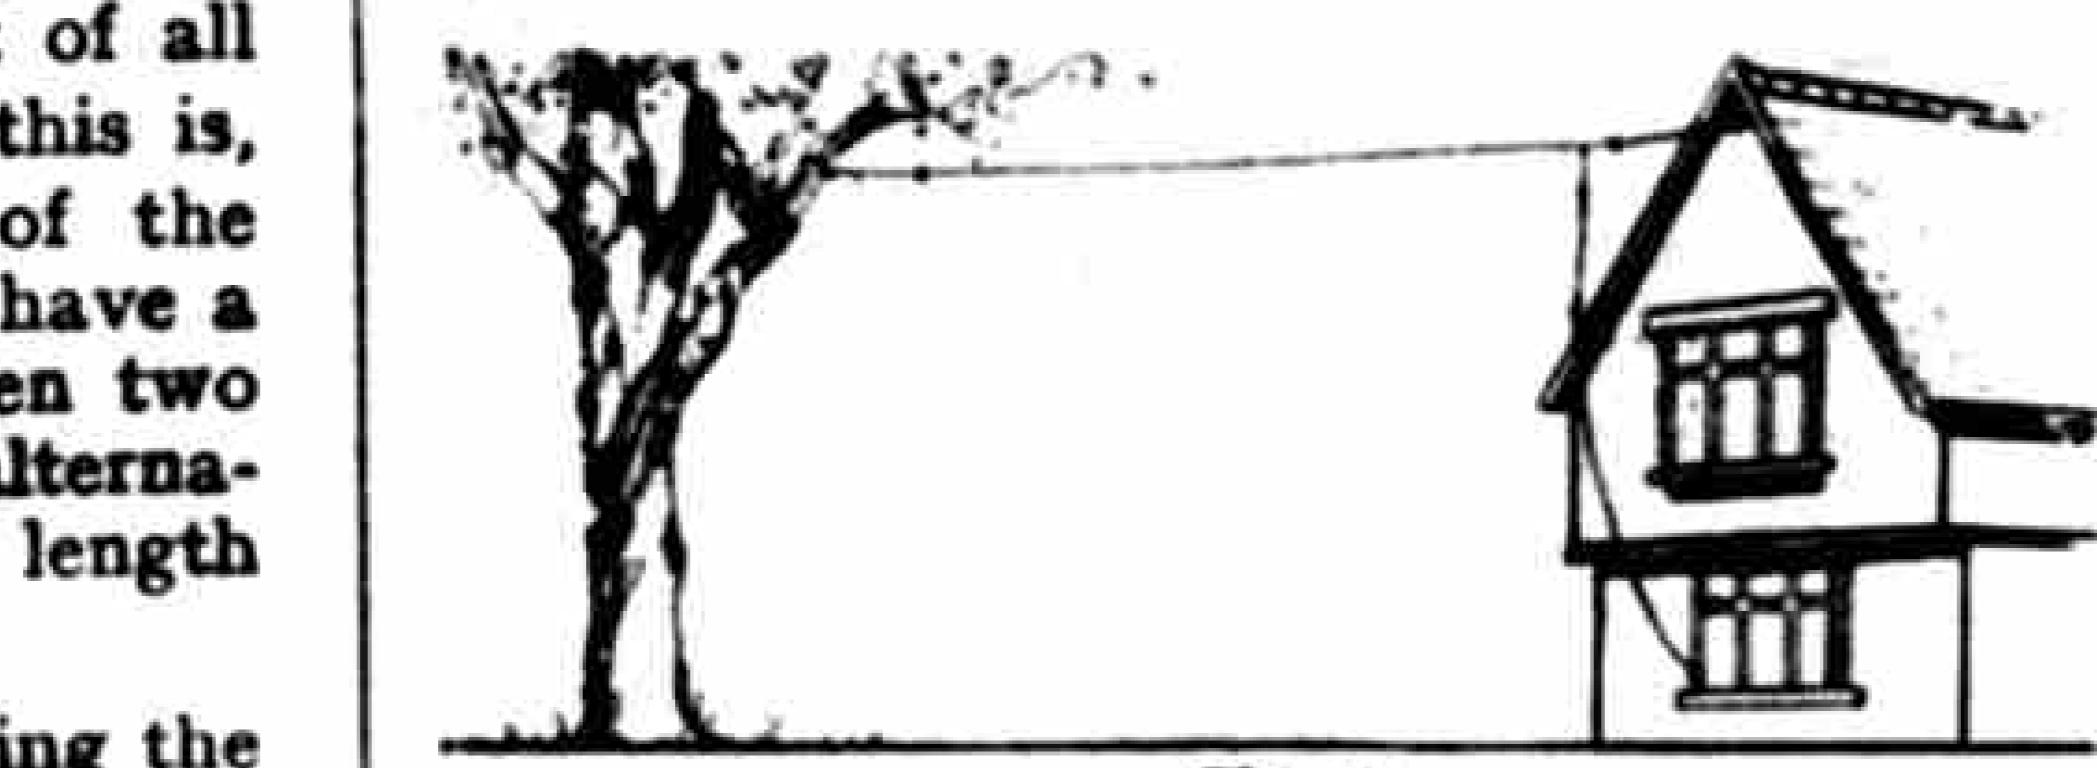

Pig. 2

should be fairly thick—gauge 14, 16 or 18, for single wire, or if the greatest efficiency is desired, a stranded copper wire should be used. (7/72's is perhaps the best of all). The wire may be bare or covered with insulation, which does not affect the impulses in any way. The Postmaster General allows an aerial length of up to 100 ft., including the height of the leading-in wire measured vertically from the leading-in point. In other words the combined height and length of the aerial must not exceed 100 ft. Any number of wires may be used in the aerial.

The "antenna," as the aerial wire is called, whether composed of bare or covered wire, must itself be insulated from the earth. Poles, house-walls, rope and such substances all conduct electric currents more or less completely, especially when wet. The antenna must not touch anything that is capable of conducting



Fig. 3

an electric current, or the impulses will be led to earth instead of to the receiving apparatus.

The best way of insulating the antenna is to fasten it to porcelain insulators, themselves suspended from the two points of suspension by rope or string. If the distance between the two points of suspension exceeds the desired length, the space may be bridged by suspending the insulators with a longer rope at either or both ends.

III

Nearly every mail brings me letters from the readers of the "M.M." asking "Which is the best type of aerial to erect?" This is a question that up a large subject. In the first place nearly every aerial that is erected is different to other aerials, because the situation of nearly every "listener-in" varies. One boy may be very fortunate and have a 30-40 ft. flag-pole at the bottom of his garden. He then has no difficulty in erecting his aerial by attaching one end to the pole and taking the other end directly into the house (Fig. 1). He is able to obtain a straight run of

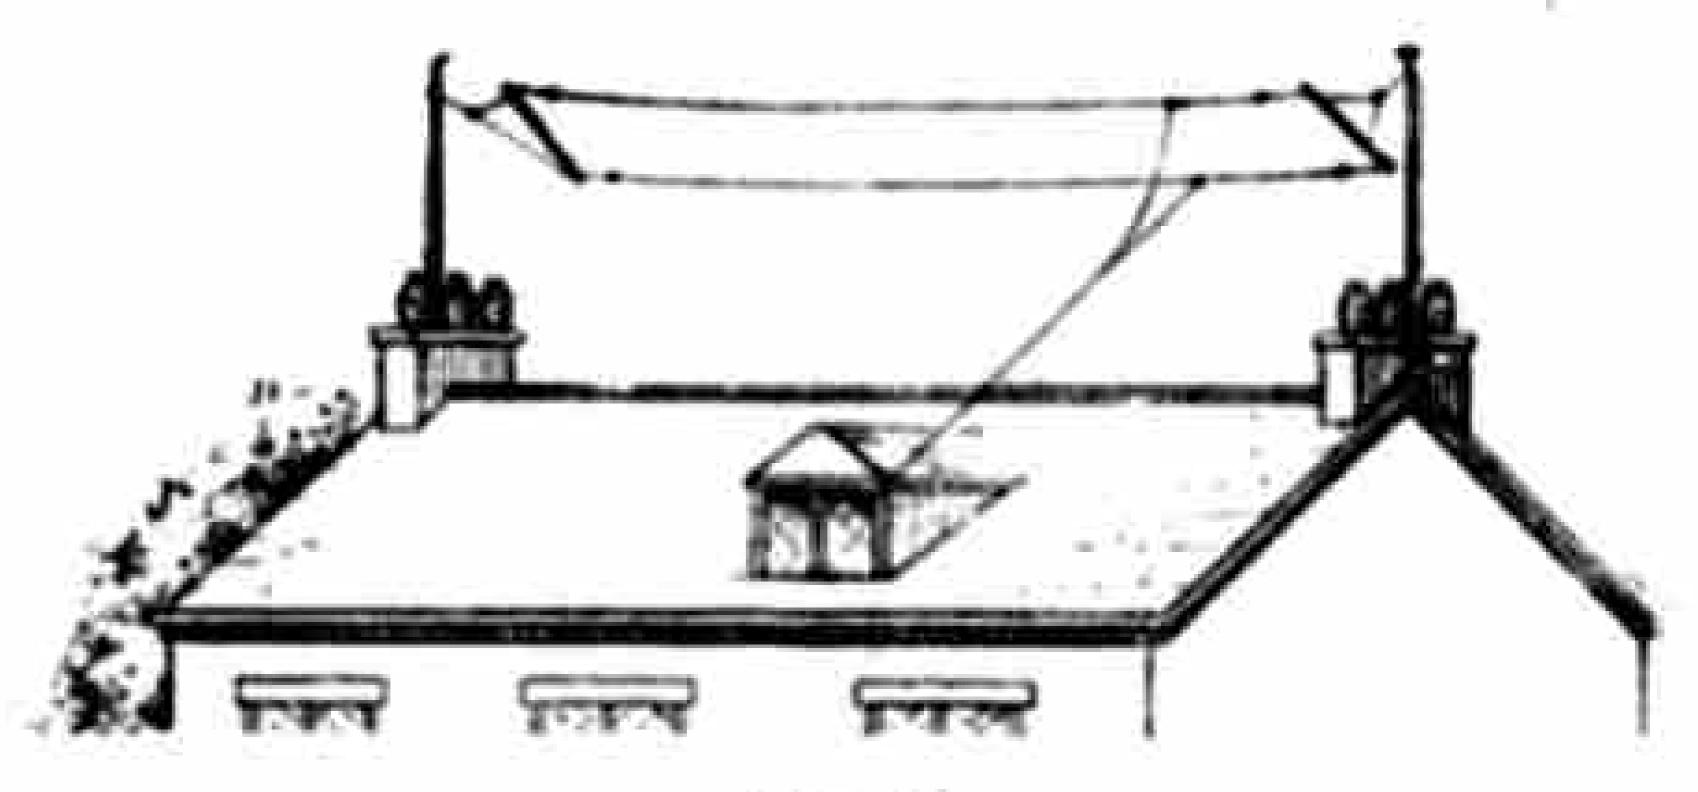


Fig. 4

say 60 ft. across the lawn, and so he uses only a single wire.

Another boy has no flag-pole, but there is a tall tree in the garden, and this he uses to support one end of the aerial.* He is more anxious than boy (Continued on page 155)

Nors.—When fastening the aerial to a branch of tree, it is a good plan to introduce a light spring between the insulator and the branch. This allows for alight movements of the tree in the wind.

Have you a Wireless Set?

Mr. E. J. BARNARD, Welling, Kent, writes:

"I think I ought to tell you how much I value 'The Amateur Mechanic.' It has proved of great assistance in a variety of jobs, and especially as to the article on WIRELESS TELEGRAPHY. I constructed an instrument entirely according to the instructions, and was rewarded with success on the first trial. Considering that my aerial is only 42 feet long and 18 feet high, I think these are grounds for self-congratulation. I may add that until I became interested in the article in your 'Amateur Mechanic' I had not the slightest elementary knowledge of Wireless Telegraphy."

You can do the same with

The Amateur Mechanic

There is no waiting to study or learn. The moment "The Amateur Mechanic" arrives you can start in to do one of 400 money-saving jobs about your home and garden.

How to build your own sheds, outhouses, poultry houses, etc.-How to cure damp walls, leaky roofs, and smoky chimneys-How to make garden frames, garden furniture, and garden paths—How to mend windows, and to make, mend, and strengthen locks and bolts-To clean, overhaul, and repair motors and motor-cycles-To instal electric light, etc.-To work in every kind of metal-To etch on brass-To write on glass-To make hectographs-To build a boat, a canoe, a canvas canoe, etc.-To paint and paper a room—To sole and heel and patch boots and shoes-To make a pair of handsewn boots-To restore colour to old brown shoes-To make household furniture-To re-seat chairs-To upholster sofas, etc.-To instal a speaking tube—To clean a stove—To repair bicycles -To work in metal-To colour metals-To repair water taps-To varnish a violin—To remedy damp walls—To repair the

piano-To make a padded chair from an old cask-To stuff animals-To dress furs-To stuff and mount birds-Wood inlaying-To prepare working drawings-To renovate a grandfather's clock-To make garden arbours, arches, seats, summerhouses, etc.-To use metal drilling tools—To renovate mirrors-To mend china-To do fretwork-To limewhite poultry houses-To do goldplating and silver-plating-To clean a watch -- To mend keyless watches and ordinary watches-To distemper ceilings and walls-To make picture-frames and frame pictures-Curtain fitting -Metal castings-To clean paint off glass—To clean boilers— To fix an anthracite stovelo re-guld and restore picture frames—Liow to use spanners— To make doors and windows draught-proof-To paint walls-To do nickel-plating-To cure noises in hot-water pipes-India and glue varnishes-To make plaster casts, etc., etc.

"Parents would be wise in buying these works for their boys. How you can turn out these books at the price beats me."--Mr. WALTER JOYCE, St. Philip's Place, Leeds.

THIS BOOK SENT FREE

The booklet which this coupon brings is free and places you under no obligation whatever. It tells you all "THE AMATEUR MECHANIC" does for you, and shows actual pages with clear illustrations.

CET IT NOW.

To THE WAVERLEY BOOK CO. LTD.

(M.M.N. Dept.)

96, Farringdon Street, London, E.C.4.

Please send me, free of charge or obligation to order, your Free Descriptive Booklet, explaining

Please send me, free of charge or obligation to order, your Free Descriptive Booklet, explaining contents, &c., of "THE AMATEUR MECHANIC," with specimen pages and pictures, and particulars as to your terms for small monthly payments, beginning thirty days after delivery.

NAME	*********						
	(Send	this	form	er a	postca	rd).	211

ADDRE65

M.M.N. 1923

Here's a Loud Speaker

YOU

CAIN

AFFORD

IT ONLY COSTS

120 ohns or

2,000 ohms



We have only been able to secure a limited number of these excellent instruments and consequently can only accept orders with cash. Delivery will be made in strict rotation and as quickly as possible.

These Loud Speakers are thoroughly reliable and efficient and give excellent results. Black Satin Finish, complete with Cord.

BRITISH

HEADPHONES

ONLY 18/~

120 ohms, 2,000 ohms or 4,000 ohms

Guaranteed efficient. Money returned if not satisfied. Send your order to-day.

BRUNET HEADPHONES

15/- per pair. Guaranteed

H. W. ROSENWALD 21, Dale Street, LIVERPOOL ______

The Men Who Gave Us Radio:

VI. HUGHES, HERTZ, ONESTI, and BRANLEY.

In previous instalments of this article we have described the work of those scientists, who, in the nineteenth century and previously, contributed to the discovery of the principles of wireless telegraphy.

Hughes

NTIL the end of the nineteenth century two methods had been used to transmit messages from one place to another without wires.

These were (1) Conduction, or the use of

the conductive properties of the earth and of water for conveying the electric force, and (2) Induction by which the electric impulse is transferred from one circuit to another, without there being connection between the two circuits.

Towards the end of the century. however, these two methods were superseded by the discovery that electro-magnetic waves may be radiated through space, and it is upon this fact that present-day Radio depends. Credit for

German named Hertz, but—although Hertz certainly was the first to publicly make known the existence of these waves—we now know that they were first discovered by a British scientist, Professor D. E. Hughes.

Hughes, who was the inventor of the microphone and of the printing telegraph, had been engaged in a study of wireless telegraphy from 1879 to 1886. He discovered that when a current passing through a coil of wire was interrupted it caused such intense currents at the exact instant of interruption in a second coil near by that the atmosphere was momentarily disturbed. Solid objects did not seem to present any obstacle to these disturbances, which seemed to be able even to pass through walls with ease.



HERTZ

Heinrich Rudolph Hertz was born at Hamburg on 22nd February, 1857. He determined to enter the Engineering profession, but devoted his attention to Physical Science. He studied successively at Munich, Berlin, and Keil, where he commenced his investigations on Clerke-Maxwell's Electro-Magnetic theory. He died at Bonn on 1st January, 1894.

Using this discovery, Hughes devised a means of transmitting signals to a considerable distance, and several leading scientists witnessed his demonstrations. In 1892 Sir William Crookes wrote that:
"Even now, telegraphing without wires

As will be seen from these articles, the invention of wireless telegraphy was not solely due to Marconi, although he was the first to put into operation a practical system. Many boys are surprised to find that Radio is the result of researches that extend over the past century. Progress may be traced by studying the lives of those men who devoted themselves to the science. The manner in which they overcame difficulties and step by step gained the desired end, is a splendid object lesson for every Meccano boy. In this series of articles we are outlining the development of Radio by briefly describing the researches of those scientists who, before Marconi's time, laid the foundation of communication without wires.

is possible within a restricted radius of a few hundred yards. Messages may be transmitted from one part of a house to another, without intervening wires."

Professor Hughes believed his success was made possible by electric waves. He did not announce his results, however, because three eminent scientists expressed the opinion that his achievement did not involve any new discovery. They stated that the results could all be explained by known electro-magnetic induction effects, and that therefore Professor Hughes's view, that there existed unknown electric waves, could not be accepted. In the face of this discouraging report, Hughes did not devote further time to the matter and the great opportunity passed him.

Hertz

Although the secret of wireless communication had not yet been solved, the triumph of science was rapidly drawing near, for a new era was to commence with the notable discoveries of Heinrich Hertz, of Munich. Hertz greatly advanced the science of electricity, taking up the subject at the point to which it had been advanced by Faraday and Clerke-Maxwell.

Hertz studied at Berlin, where in 1880 he became assistant to Helmholtz, a notable physicist. He was particularly attracted by Clerke-Maxwell's theory regarding light and electro-magnetic waves in the ether, and (in 1888) commenced to investigate the subject at the suggestion of Helmholtz. His object was to establish the existence of the waves by actual experiment, and at last, after considerable work and study, he succeeded in doing so.

In these experiments Hertz used an apparatus, called an "oscillator," consisting of two metal discs each mounted at the end of a rod. Metal knobs were

and when these were connected to an induction coil they became charged. This caused a spark to jump across the small gap that separated the two balls. When this occurred, electric waves were

radiated from the apparatus, each oscillation causing, as it were, a ripple in the ether.

Hertz next bent a wire into a circular shape, cut it and placed a small metal knob at the end of each wire. This part of the apparatus, called the "resonator," was placed a short distance away from the oscillator. When the latter was set in action, sparks were seen to jump across the gap in the resonator, although the latter was not connected in any way with the oscillator.

Hertz showed that the waves in the ether caused by the oscillation closely resemble waves of light. He showed also that they might be reflected, refracted and even polarised, just as may light. He thus brilliantly demonstrated beyond doubt Clerke-Maxwell's theory that light and electricity are identical in their essential details.

Onesti

Before wireless telegraphy could become possible, some more delicate apparatus than a resonator spark-gap was necessary for the detection of the Hertzian waves. In 1885 Professor Galzecchi Onesti, an Italian, introduced a more sensitive detector. He used a small quantity of iron filings, enclosed in a glass tube, between two corks. Through each cork there (Continued on page 168)



BRANLEY

Edouard Branley was born at Amiens in 1846 and was educated at St. Quentin College and Henry IV. College, Paris. He is a Professor of Physics at the Catholic Institute. Paris, and a Member of the Institute of France. His discovery of the coherer in 1890 marked a distinct stepping-stone in the history of Radio.

Listen-in with a Meccano Receiver

No. 1 Meccano Crystal Receiver


With a good aerial this set will receive telephony up to about 25 miles from a broadcasting station, and Morse signals up to, and exceeding, 100 miles. The set, which may be used with a broadcasting licence obtainable from any Post Office at a cost of 10/-, will receive on wave lengths from zero to approximately 1,000 metres.

R.S. 1-Receiving Set complete, tested and guaranteed, price ... Compulsory Broadcasting Fee

Price 30 /-





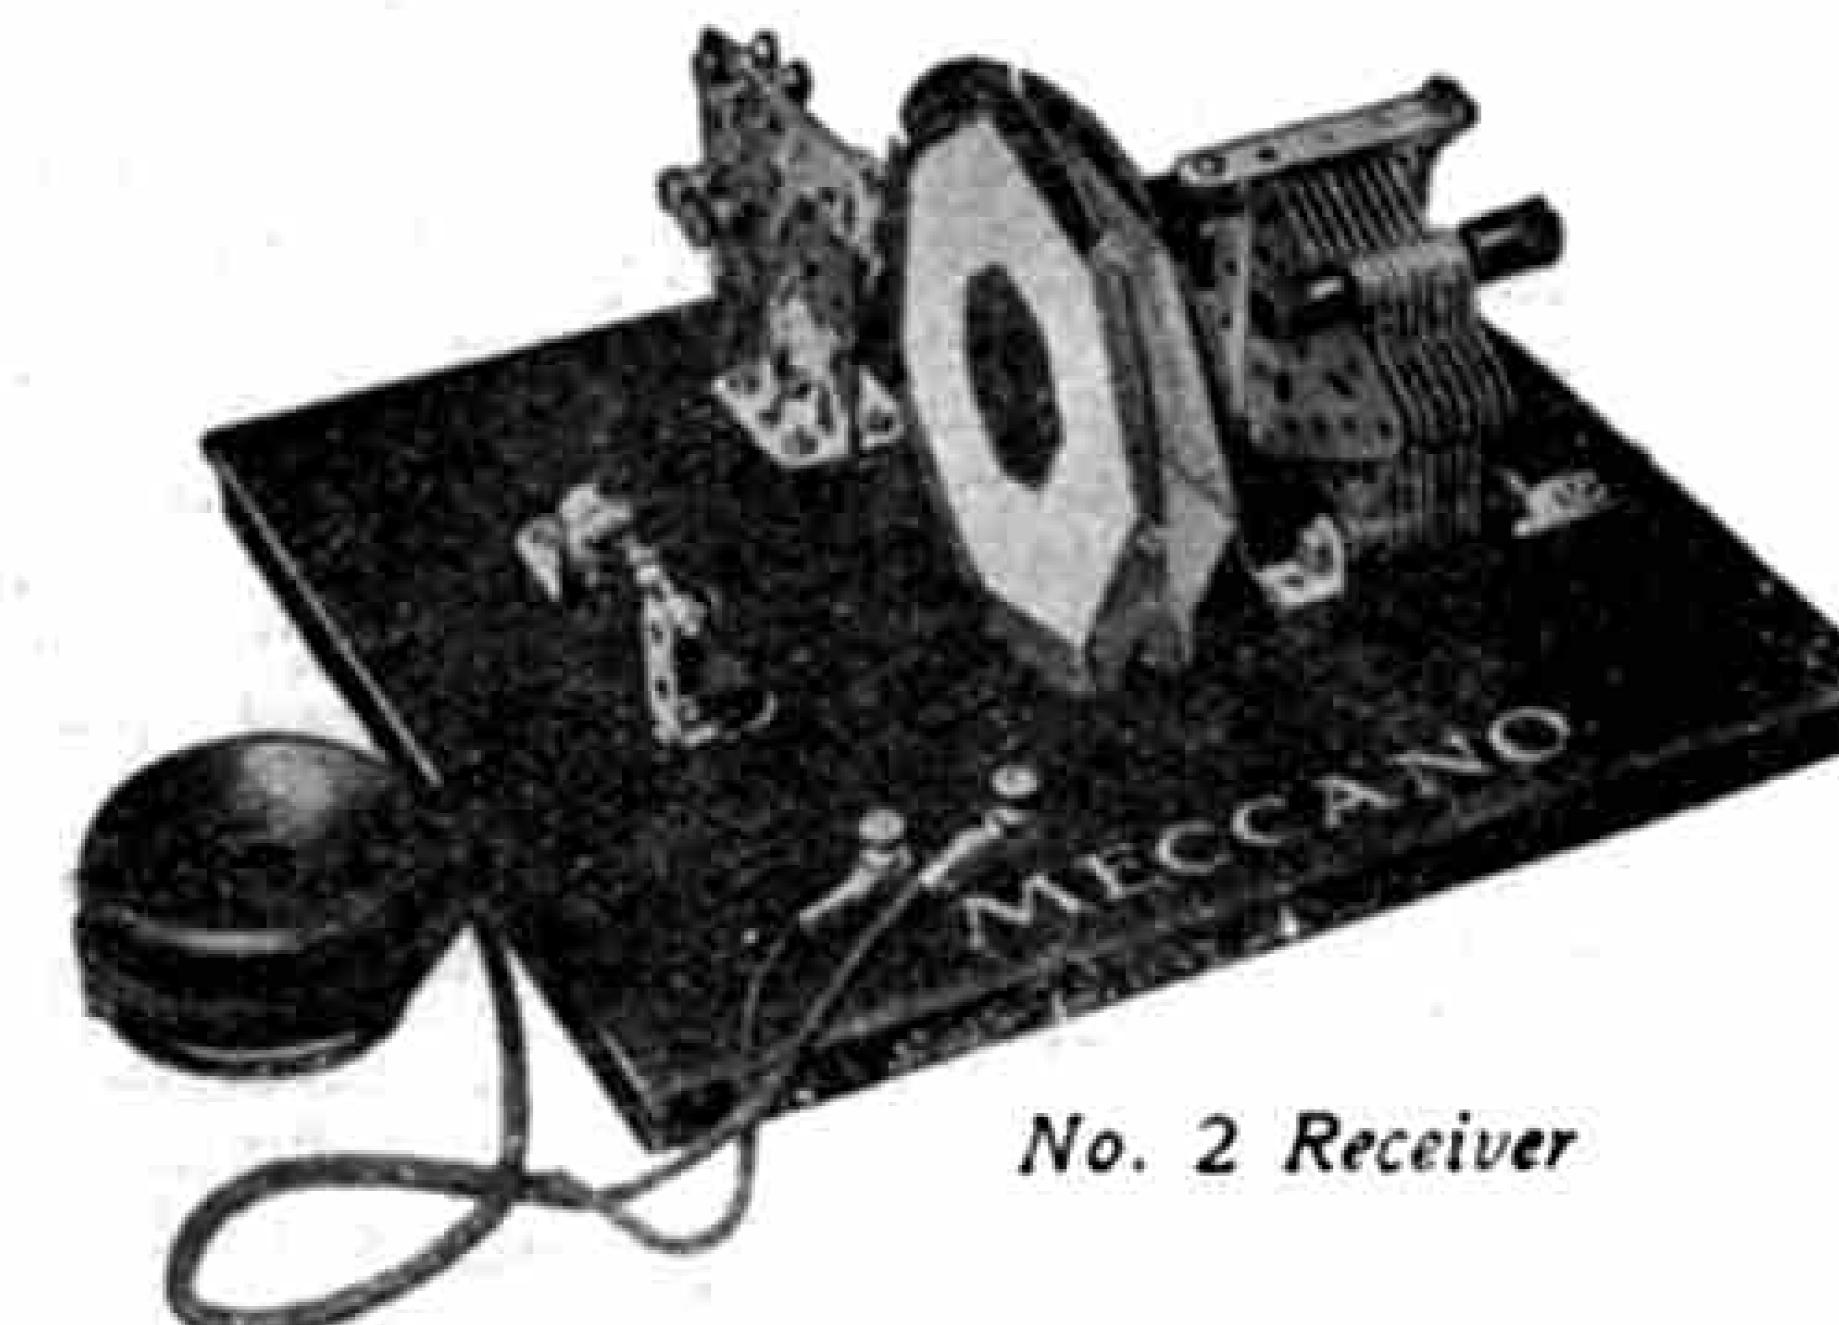

Meccano Crystal Receiver

This set is of the constructional type and is specially adapted to the requirements of those who wish to carry out simple experiments. Its range is the same as that of No. I set described above, and it receives on wave lengths of approximately 300-500 metres. It may only be used with a constructor's licence, which costs 15/-, and is obtainable from any Post Office.

R.S. 2—Complete Set of Parts, in strong carton, including single telephone 2,000 ohms resistance, price R.S. 2a—Complete Set of Parts, in strong carton, without telephone, price

MECCANO AERIAL OUTFIT

The Meccano Aerial Outfit contains everything for the erection of a regulation aerial with the exception of poles. The contents are as follows: Antenna 65 ft. 16 Gauge Bare Copper Wire. Lead-in (soldered to Antenna) 29 ft. 16 Gauge Bare Copper Wire coupled to 6 ft. of insulated 16 Gauge Bare Copper Wire. Earth Wire 30 ft. 18 Gauge Bare Copper Wire. Insulators (egg-shaped) 2. Pulleys (porcelain) 2.

MECCANO LIMITED

BINNS ROAD

LIVERPOOL



R. Griffiths (Doncaster). - The No. 2 Crystal Receiver is constructed of Meccano parts. These parts are particularly suitable for carrying out experiments.

C. Andrews (Maidenhead). - (1) As you are approximately 26 miles from London you should have no difficulty in receiving broadcast from 2 L.O. with a Meccano Crystal Receiver, provided your acrial is erected as high as possible and carefully insulated. (2) Although it is possible to use two crystals on a set it would not materially affect its power of reception, and I would advise you to use one crystal only. (3) Marconi House is the nearest broadcasting station to Maidenhead.

P. Scott (Stratford-on-Avon). - The Meccano Crystal Set No. I may be used with a broadcasting licence. The Meccano Crystal Set No. 2 may only be used with a constructor's licence (15/-). Either is obtainable from any Post Office.

J. E. Savidge (Southborough).—It is generally recognised that a Crystal Receiver is capable of receiving telephony up to a distance of 15-20 miles. but much depends upon local conditions, and sometimes this distance is increased to 25-35 miles.

R. S. Sanderson (Edinburgh) .- The size of the former disc is 31" diameter. (2) 120 turns of 22 G. enamelled copper wire. (3) Yes, you may purchase the scale separately.

A. J. Riley (London, E. 11).-I trust that you have had satisfactory results from your set using the revised circuit I sent you. Your suggestion for a new Meccano part was duly passed to the Editor of the Bright Ideas column.

H. Critchley (Southport) and R. Carman (Chester.) -(1) 28 turns of 23 G.SSC wire. (2) 32 turns of 36

G.SSC wire.

A. Illingworth (Bradford).—It will be impossible to receive telephone broadcast from Manchester with a Crystal Receiver, owing to the circening effect of the Pennine Range.

L. Hart (Liverpool) .- It is immaterial if there are any joins in the wire of a tuning coil, providing they are soldered and insulated.

H. J. Bowers (Surbiton).—The Postmaster General limits the length of an aerial to 100 feet, including lead-in wire.

Rowland Hill (Kettering) .- (1) The Meccano Receivers may be supplemented with a high frequency amplifying valve, which would increase the distance of reception. (2) I have never heard of steel plates being treated in the way you mention.

D. Parker (Newport). -- An extra inductance disc may be added to the No. 2 Meccano Receiver by bolting an extra hinge on the fibre plate.

R. Kirkwood (Holt).—To carry out your suggested programme you will require to obtain a 5-valve receiving set



A specially-equipped radio station has been installed at the Vollot Observatory, on the peak of Mont Blanc. Climbing parties in the Alps are now warned to carry radio apparatus with them so that help may be called from the Observatory in case of emergency.

To a great extent this innovation eliminates the splendid rescue work hitherto carried out by the St. Bernard dogs of the Alpine Monasteries.

Beyond the cost of a licence, amounting to one dollar, radio amateurs in Canada have no restrictions whatever to contend with.

A man who has been deaf for thirty years has recently heard a wireless concert.

The desolate recf of Cabras Island, Porto Rico's icper colony, has been considerably brightened by the installation of a radio set. This enables the untortunate exiles to enjoy concerts and orchestral recitals broadcast from New York and Chicago.

Whilst on a voyage to Australia, the Aberdeen liner " Themistocles "-fitted with the latest Marconi Radio apparatus—was constantly in communication with land stations in Great Britain. During the voyage no less than 65,000 words of news were received.

The record for Canadian long-distance broadcasting is held by an enthusiast living in Darlington, England. On September 23rd, he heard a service broadcast from the Grace Presbyterian Church in Calgary, a distance of over 6,000 miles.

Recent changes in wave lengths have been announced by the British Broadcasting Company for the following stations: -Aberdeen, 495 metres; Bournemouth, 385 metres; London, 363 metres; Manchester, 370 metres. The wave lengths of other stations remain unchanged.

To decide whether it was possible for radio waves to penetrate thick walls an interesting experiment was carried out in America. Three Bank officials were locked inside the four-foot walls of a burglar-procf vault and clearly heard a radio concert broadcasted from New York, 60 miles distant. The aerial used was of the loop type, and, with the rest of the apparatus, was inside the vault.

King Christian has opened the new wireless telephone system between Copenhagen and the island of Bornbolm, in the Baltic, a distance of about 100 miles. The wireless is linked up at each end with the ordinary telephone system, and the ceremony demonstrated the ease with which communication can be carried on.

The installation of a relay station on the outskirts of the city, enables owners of crystal sets in Sheffield to hear broadcast from Manchester, and other distant stations. A special land-line has been laid to the station from Manchester, so that the whole programme may be re-transmitted from the Sheffield station. To prevent any distortion of the sound, amplifiers are used at each end of the line and the signals are then sent out on a wave length of 350 metres. The relay station also transmits local talent once a week in response to repeated requests from listeners.


The Sheffield relay station is the first of eleven that are to be erected all over the country. The scheme includes stations for Plymouth, Liverpool. Leeds, Bristol, Hull, Bradford, Wokingham, Portsmouth, Stoke on-Trent, Leicester and Edinburgh.

BELOW a RIVER on an EXPRESS ENGINE

A Run Through the Severn Tunnel

By Master Harold Simpson

HE safety valve was lifting gently and the Westinghouse pump clicking softly, as I swung myself on to the footplate of the huge express engine. The driver, an old grizzled veteran of the iron road, welcomed me with a smile and a nod, and advised me to hold on to my hat when we started. Meanwhile

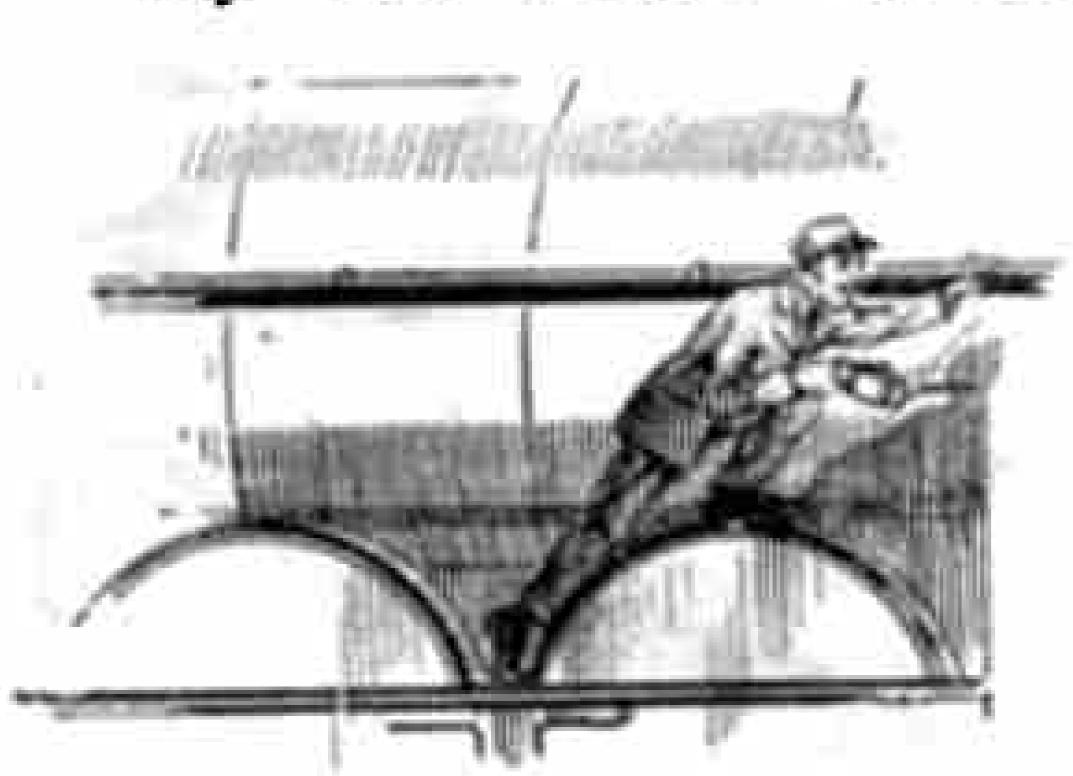

scrambling, Tarzan fashion, over
the wheel-guards
towards the cab.
He carried an oilcan in his hand
and had been
oiling a slidevalve.

Just then the signal fell with a crash, and the driver immediately crossed over to the other side of the cab and, leaning out, looked down the platform for the guard's "Right-away!" The slamming of doors denoted that all the passengers were aboard. The stoker scrambled in,

the guard's whistle blew. Giving a warning blast on the whistle, the driver moved the regulator, and with a tightening of couplings, we were off on our long journey.



Chattering and lurching over the points and crossings we soon joined the main track, and with the engine purring contentedly we quickly left the smoky city behind us. With a glance at the steamgauge, the driver "let her rip," as he laughingly described it. Signal-boxes, telegraph posts, bridges, deep and narrow cuttings, wayside stations—all flashed past so swiftly that I was bewildered. Not until we approached Severn Valley Junction did the driver check the pace.

Speeding again, we crashed over points, and past a long goods train, laden with



by a fussy tank engine.
Then we reached another clear stretch. A signalman waved his hand as we passed his box, shouting some unintelligible words. "Speed, speed" was our only cry, as we thundered over an iron bridge spanning a canal.

Suddenly the driver applied the steam brake and shouted to me to hold tight. Far off I could see what looked like a tiny dot upon the red cliff ahead.

"That's the Severn Tunnel," shouted the driver, above the noise and clatter. "it's over four miles long."



We were now tearing down the long incline at over sixty miles an hour. A prolonged shriek of the whistle, then daylight

was gone! The darkness seemed full of flying shadows, and the driver and stoker looked like dim, shadowy outlines. Sparks rising in front of us from the now invisible funnel, flew backwards like fire-flies.

In the middle of the tunnel I noticed what seemed like a group-of pin-points of light in the distance. These swiftly grew larger and larger, and I saw the blurred

outline of another train approaching. It passed us as a long stream of light, which lit up our eager faces. The



roar and rattle it raised was deafening, yet shrill above it rose the scream of our whistle.

Once the stoker threw open the furnace door, and I was startled by the sudden, unexpected glare and heat. I had a

view of the sooty and dripping walls of the tunnel above, with the shadow of the stoker assuming gigantic




proportions. The carriages behind looked an enormous size, as they rushed along under the rounded roof. Only for a second or two did the glimpse remain, however, and with the shutting of the furnace door we swept again into the darksome cavern. It seemed wonderful to think that on the broad river above there were huge ships steaming or lying at anchor.

We were ascending the upgrade now

and ahead I saw a spot of light, which slowly took a rounded shape.

Then came a sort of green faintness of light which in-

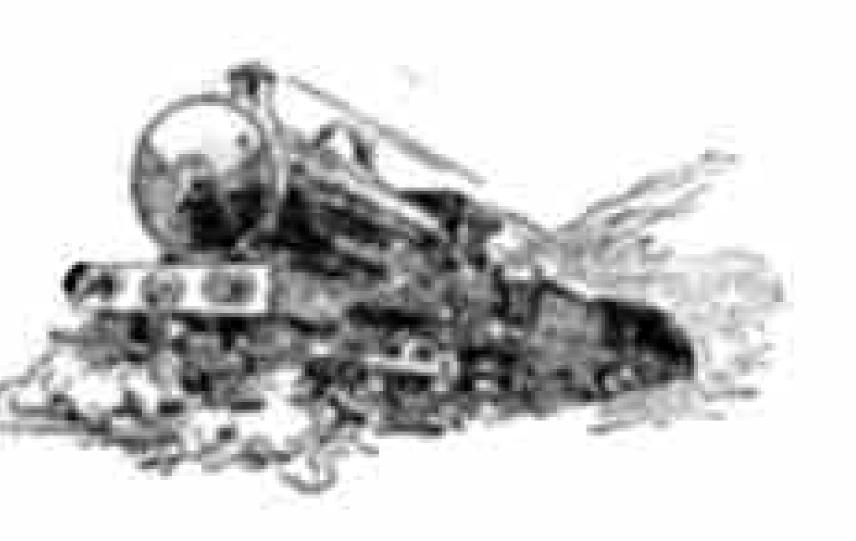

creased in power, until at last we burst through again into the brilliant day-light. The engine, puffing like a worn-out beast, yet strong enough to haul the train for many miles more, went speeding on its way and seemed almost to rejoice at being in the bright sunshine once again.

Interesting Paragraphs

A tree-doctor in America is said to earn £200,000 a year by curing the various ills to which all trees are subject. When this man, whose name is John Davey, was 27 years of age, he went to America as a farm labourer and bought books on trees. Later he became a prosperous farmer, and wrote a book called "The Tree Doctor" which made him famous. He has now earned for himself the title of "The Father of Tree Surgery," and is the head of the Davey Institute.

The Big Wheel at Paris has now been d.smantled, and all that remains of the massive structure are the two pylons which supported the 36-ton axle.

In a new twisting machine recently invented for the textile industry, the bobbins rotate simultaneously with the spools that receive the spun thread. This causes both ends to twist and gives great firmness and strength to the thread. It is claimed that the new machine twists seven times as fast as machines of the present type.

The contract for the construction of a new reservoir and dam for the Belfast Water Commissioners has been secured by a London firm, Messrs. S. Pearson & Sons Ltd., who estimate the work will cost £1,035,000. The reservoir will be built in the Mourne Mountains area, County Down, and will supply 10,000,000 gallons of water a day. Its construction is expected to take several years.

Our Special Xmas Number

A special double number, combining the December and January issues of the "M.M." will be ready on or before the 15th December. Price 2d. from any Meccano dealer or newsagent or bookstall. (3d. post free from this office).

Order your copy now, as only sufficient magazines will be printed to fill actual orders.

Meccano Magazine, Binns Road, Liverpool.

Two New Books by the Editor

of the Meccano Magazine


Engineering for Boys.

By Ellison Hawks, Editor of the Meccano Magazine.

This book has been specially written in response to the many appeals that Mr. Hawks receives every year from boys who are keen on engineering, asking him to tell them of a book that describes engineering subjects in which they are particularly interested. As Editor of the *Meccano Magazine* Mr. Hawks is in a position to speak with authority.

Nearly 400 pages are packed with just that kind of information that Meccano boys want, while there are over 100 pictures from unique photographs of marine engines, liners warships, docks, lighthouses, locomotives, bridges, dams, canals, engineering shops and machinery, generating stations, etc., beautifully printed on plate paper, besides many

text cuts. Boys who wish to become engineers will be specially interested in the chapter "The Making of an Engineer," which will enable them to decide which branch of engineering they will take up.

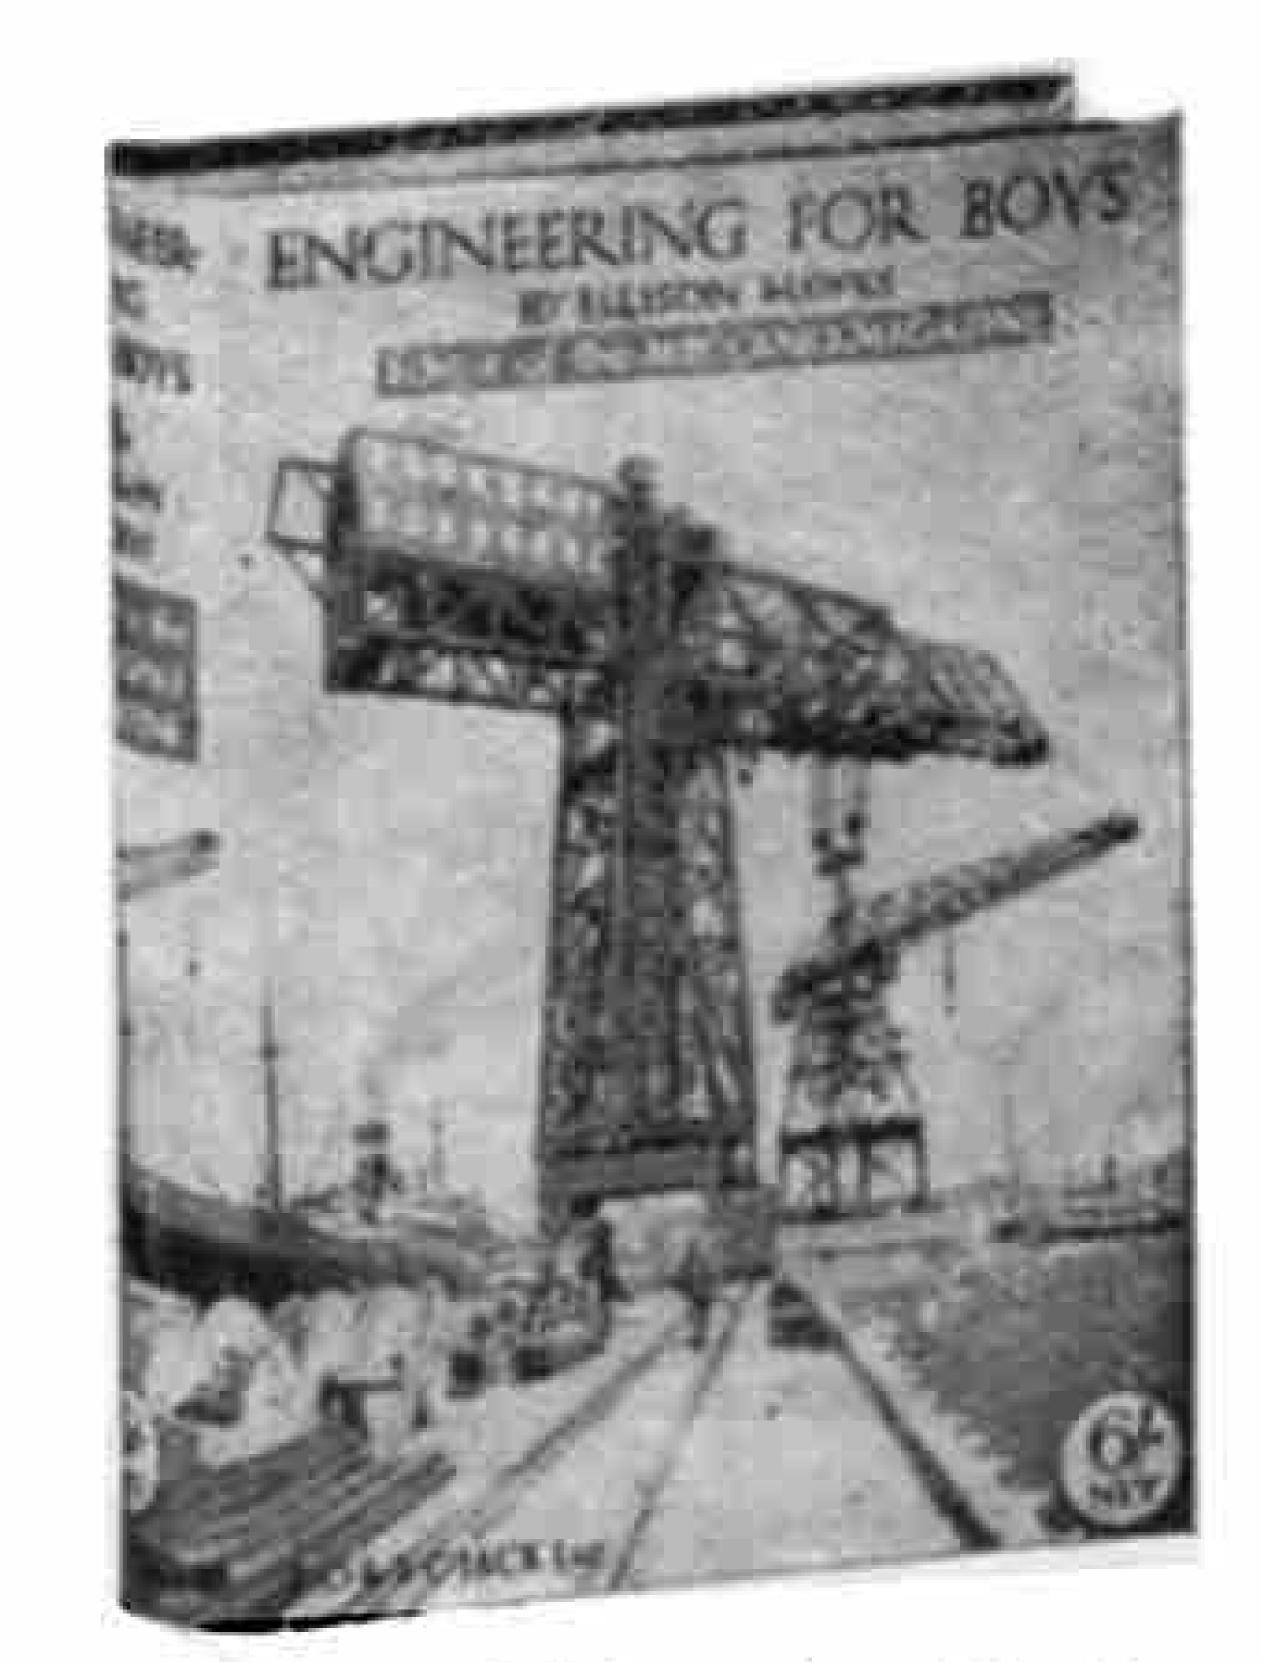



The Romance and Reality of Radio. 3/6 new

By Ellison Hawks, Editor of the Meccano Magazine.

This book is intended for those who wish to obtain, as briefly and as clearly as possible, a comprehensive knowledge of Radio.

It brings together, in one cover, a brief account of the History, Theory and Practice of the highly-important and rapidly-growing science of Radio, from the early experiments of Morse to the wonderful trans-oceanic Radio communication of to-day.

No mathematical symbols, forbidding-looking formulæ, or other technicalities find place in the pages of this book, which will show the beginner that Radio is one of the most fascinating of sciences, and as a hobby, a pleasant and instructive pastime. Fully illustrated with plates and text cuts.

All About Our British Railways.

By G. GIBBARD JACKSON.

All boys of a mechanical turn of mind know the fascination of railways, and this book will satisfy their curiosity and scientific leanings. The author has had the help of the chief mechanical engineers and superintendents of the line of the great railway companies. Nearly 120 pictures from photographs on plate paper, together with numerous cuts, illustrate the interesting text.

The "ROMANCE OF REALITY" Series.

A series of books by well-qualified writers, introducing the youthful mind to the wonders of nature and of discovery and invention. Well illustrated. Per volume, 6/- net.

Astronomy. By Ellison Hawks.

Water in Nature. By W. Coles Finch and Ellison Hawks.

Electricity. By W. H. McCormick.

The Man-of-War.

By Commander E. H. CURREY. R.N.

Etc.

Engineering. By Gordon Knox.

Modern Inventions. By V. E. Johnson.

Geology. By A. R. DWERRYHOUSE, D.Sc.

How Animals Work.

By F. MARTIN DUNCAN, F.R.M.S.


ALL ABOUT OUR

BRITISH RAILWAYS

Etc.

Supplied by all Booksellers. Write for a copy of the New Illustrated Catalogue.

THOMAS NELSON & SONS LTD. (T. C. & E. C. JACK LTD.)
35 and 36, Paternoster Row, LONDON, E.C. 4, and Parkside Works, EDINBURGH

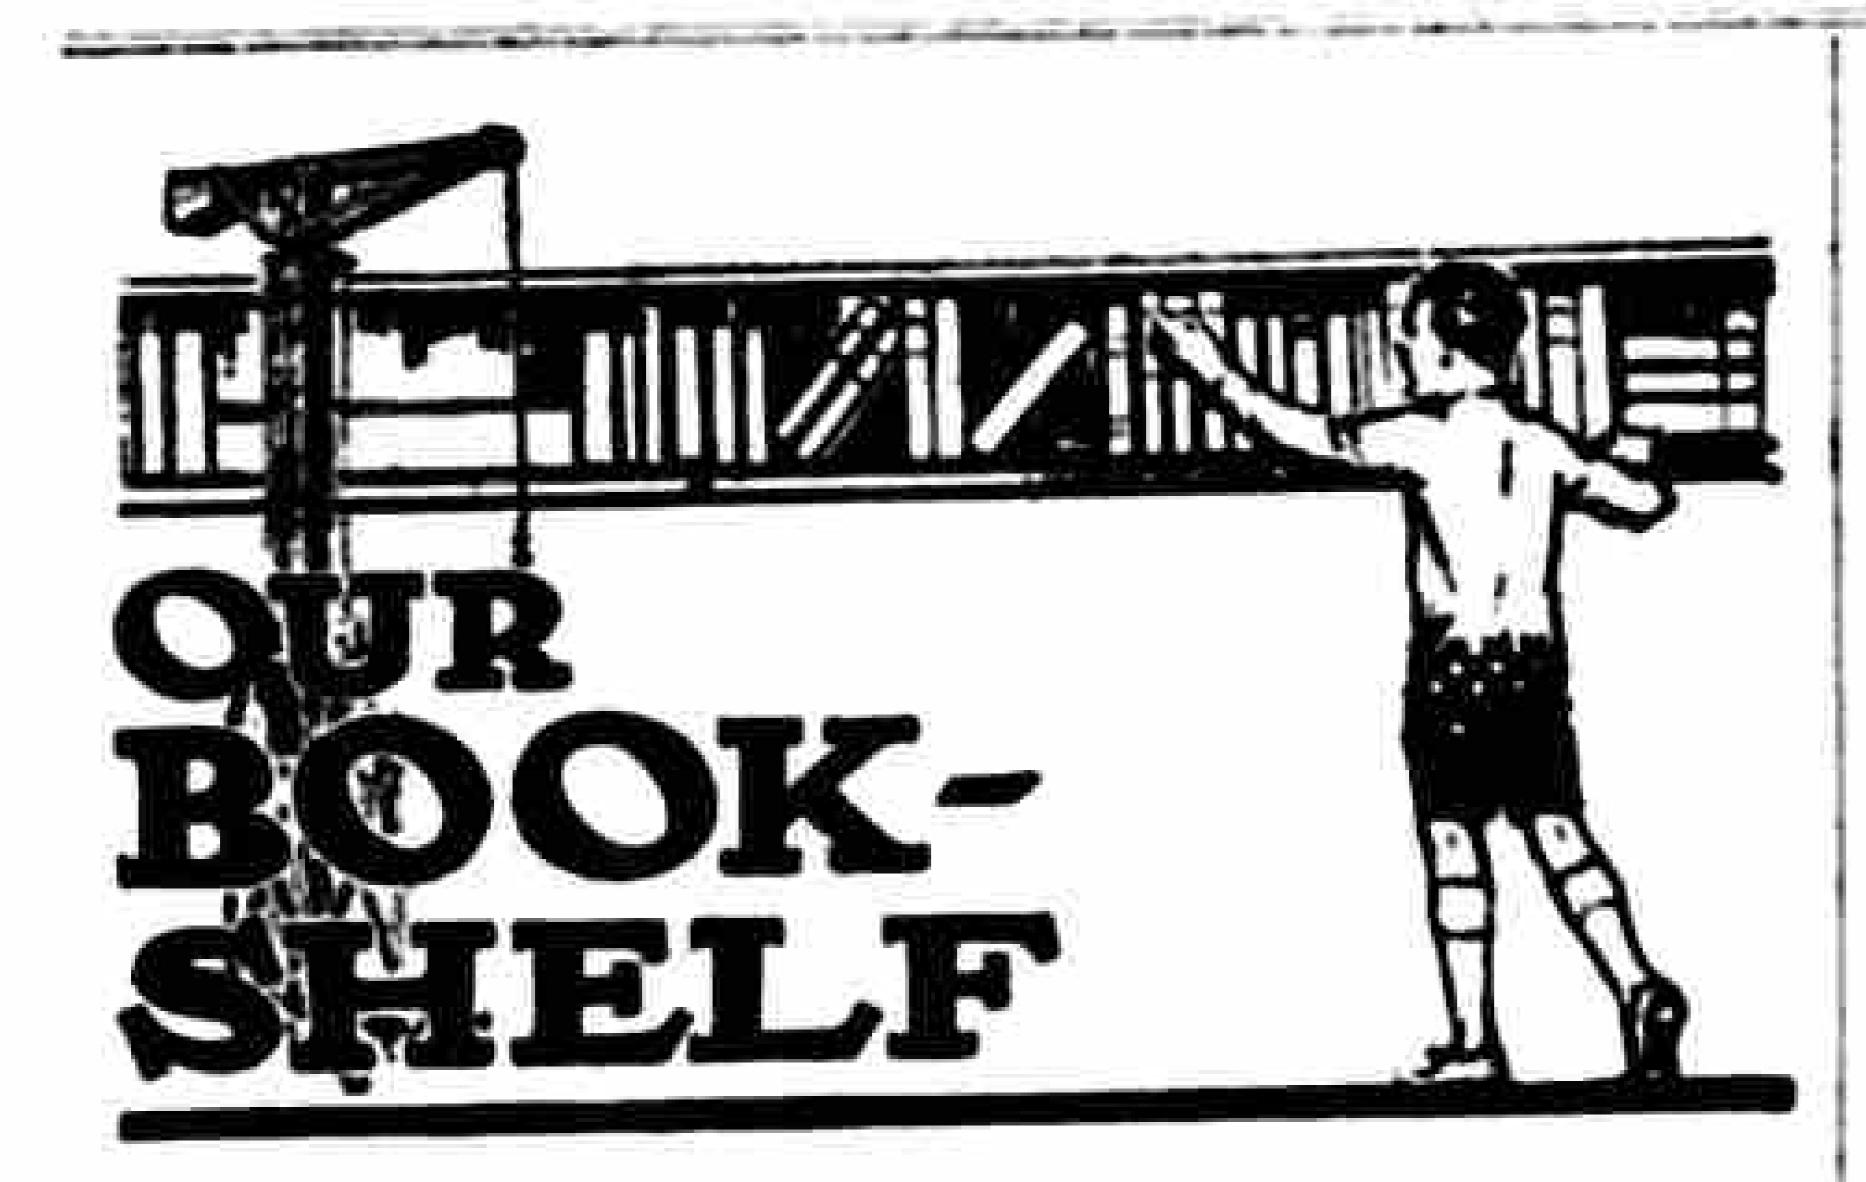

Readers frequently write to me asking if I can recommend books that are both of interest and of use. In this column I hope to review books that I consider specially appeal to Meccano boys. I do not actually supply these books, which may be obtained either through any bookseller or direct from the publishers.

THE last three months of the year are the best for book lovers, because there are then so many new books to read, and one is able to enjoy them in comfort at the fireside during the dark, cold nights.

Surely boys get the best books these days, because there are such wonderful stories written for their entertainment. Since such masters as R. L. Stevenson, Mark Twain, Rudyard Kipling, and J. M. Barrie established the fashion, our best writers have not disdained to set their hands and brains to the writing of boys' books, to the permanent eclipse, one hopes, of the futile "blood-and-thunder" and "penny-dreadful."

"Carpentry and Bench Work"

(Pub. by " B.O.P. " Office. Price 1/6 net).

This is a wonderfully handy little book, belonging to the "How to Make" series. The 200 pages are packed with useful information on all kinds of wood-working. A very wide field is covered, dealing with the making of a simple tool box; a variety of book cases and picture-frames; rustic garden seats and arches, and fancy occasional tables; beehives; steam and water turbines, etc. Written in a simple manner, and clearly illustrated, this book also contains warning hints regarding many common errors. The articles on chip-carving and the making of one's own tools alone make the book worthy of a place on the practical boy's bookshelf. Any Meccano boy who is handy with his tools, and interested in model yachts and boats, is advised to add this volume to his bookshelf.

"The Romance and Reality of Radio" by Ellison Hawks

(Pub. by T. C. & E. C. Jack. Price 3/6).

This book tells the story of wireless telegraphy and telephony in a clear and simple style that compels the interest of the reader. It is the only book published containing historical, theoretical, and practical information regarding Radio. Radio is not an easy subject, and we should be grateful to the author for explaining the principles of this new science in a manner which the non-technical mind can easily follow. In addition to describing the work of the pioneers—the "Men who gave us Radio"—their disappointments and their triumphs, the book also deals with the construction of receiving sets, types of aerials, and other useful information. There are many plates and figures in the text to help to make everything plain. Altogether this is a well-written and well-illustrated book.

The Last Secrets

by John Buchan

(Pub. by Nelson. Price 5/- net).

It is the privilege of the reader of this thrilling book to accompany some of the world's bravest men on wonderful journeys of endurance and exploration. Among other adventures the author lays bare the mysteries of the impregnable fortress of Lhassa, that stronghold of worshippers of a strange religion. The Mountains of the Moon, situated in equatorial Africa yet covered in snow all the year round, are discovered and climbed. The holy Cities of Islam, the virgin forests of New Guinea, and the mighty splendour of Mount Everest deliver up their age-old secrets to the courageous explorer. Last but not least is the memorable dash across snow and ice to plant Peary's victorious standard at the North Pole, and the account of Scott's daring expedition, with references to Capt. Oates, "a very gallant gentleman.

Jack Without a Roof

by Major Charles Gibson

(Pub. by " B.O.P." Office. Price 4/6 net).

This is a tale of the French Revolution, and the author has well preserved the atmosphere and spirit of this period. boy of three, the son of my Lord Marquis de Savenay, escapes one day from his nurse and is lost in the woods. He is found by a dwarf, who takes this "cub of an aristocrat " to his own home. his new name of Jacques Sansabri he is reared in squalor and misery until he is eighteen, when he takes part in the storming of the Bastille. Unknowingly he saves the life of his father, and the two come together later under tragic circumstances. The story of the reunion of father and son is vividly told.

The Empire Annual for Boys

(Pub. by " B.O.P." Office. Price 6/- net).

This volume, which makes a welcome reappearance, contains splendid school stories and tales of adventure in India, North America, Greenland, Central Africa and Mexico. It concludes with a diverting ghost story from New Zealand. Thirty stories in all by well-known writers. A handsome volume well illustrated.

A Scout of '45

by E. Charles Vivian

(Pub. by " B.O.P." Office. Price 3/6).

Amongst the many good books published this month I have read this one with interest. It is a tale of the Jacobite Rising in which Arthur Wyland, heir to Sonsett, leaves his guardian's roof and sets out to make his fortune. He encounters Gay Harry, a "knight of the road," and the two join in the pursuit and rescue of Mistress Dorothy Trafford, who has been carried off by the Jacobites and held as hostage for her father. It is a stirring tale of the road, of nightly encounters with desperate men and a final clash of arms on the bridge at dawn. Illustrations by Gordon Browne, R.I.

Model of Wireless Receiver.

(Pub. by Geo. Philip & Sons Ltd. Price 2 /6).

This is an excellent cardboard model of a twovalve receiving set, which, by means of a very ingenious device, shows exactly how the valves function. Seven different positions are obtainable, and in each, the changes in the circuit are shown by recognised symbols which automatically become visible.

BOOKS RECEIVED

We have received copies of the undermentioned books during the past month, and these will be reviewed in this column in a future issue.

"ENGINEERING FOR BOYS"

by Ellison Hawks (T. C. & E. C. Jack), 6/"TODDY SCORES AGAIN"

by Alfred Judd (Nelson), 5/"BETWEEN TWO SCHOOLS"

by Harold Avery (Nelson), 5/-

" JACK O' LANGSETT"

by R. A. H. Goodyear (Nelson), 5/"MORE ABOUT P. J., THE SECRET
SERVICE BOY" by Hamilton (Nelson), 5/-

"THE BOY ELECTRICIAN

by A. P. Morgan (Harrap & Co. Ltd.), 7/6
"THE SCHOOLBOY'S ANNUAL"
("Boy's Own Paper" Publishers), 3/6 net.

Catalogues Received

We have received the following catalogues this month. Should any of our readers write to the firms concerned, they will assist us by mentioning the "Meccano Magazine."

The Nelson Lists (issued by Messrs. T. Nelson & Sons Ltd., 35/6, Paternoster Row, E.C.), come to us with their dainty covers and capital illustrations of tempting books. It is much easier and more satisfactory to select from lists such as these, than to spend long hours in book-shops. Free on application.

The Peto-Scott Co. Ltd. (64, High Holborn, W.C. 1), send us a very complete list of Wireless Components. The wireless accessories supplied by this firm have a high reputation and their Unit System is reliable and efficient. The catalogue is exceptionally well illustrated and costs 3d.

The Games Dept. of Messrs. D. & W. Gibbs Ltd. ("Cold Cream Soap Works," London, E.1), add a joy to Christmas by publishing "Games for Children." If you are giving a party this book will help you wonderfully. The "Ivory Castles" books are good fairy stories. Each book costs 6d., but Messrs. Gibbs Ltd. will tell you how to get them free on receipt of a postcard.

From where do Dean & Son Ltd. (29, King St., W.C.2), get all their ideas for children's toy books? The "Youngster's Modeller" series of four books, are fine fun, and the new "Stencil Books" compel you to paint like a true artist. The Dean catalogue "What Every Youngster Wants" describes scores of dainty and pleasing painting and drawing books, plays for young actors, etc. Free on application.

From Lott's Bricks Ltd. (Watford, Herts.), we receive a list of their "Building Blocks" Outfits, 2/- to 35/-, and a further series containing Trees, Fences, Shrubs, Palings, etc. There are illustrations of villages, churches, skyscrapers, colleges, etc., which look astonishingly real. A well-designed building block system. Lists free on application.

A Talk About Aerials—(cont. from page 149)

No. 1 to obtain the very best results possible. Instead of taking the second end of the aerial directly to a room on the ground floor, he makes a bid for greater efficiency by fixing it to the gable-end of the roof. (Fig. 2).

A third boy has a flag-pole in the garden, but much nearer the house than the first boy's pole. Instead of using a single wire, therefore, he erects an aerial with a double antennæ, attaching the other end to a short pole, fixed to the chimney

(Fig. 3).

Boy No. 4 has neither flag-pole nor tree, but he is able to obtain parents' and landlord's permission to fix two poles to the house chimneys, and with a span of 30 to 40 ft., finds his double aerial very

efficient (Fig. 4).

We thus see that, in the first place, local conditions determine, to a large extent, the details of aerial erected.

NEXT MONTH.

"T" and "L" AERIALS. DIRECTIVE AERIALS. AERIALS WITHOUT POLES

I'o-day the world relies on Ingersolls for Time

In the Watch and Clock-making industry Ingersolls hold first place for accuracy, dependability and long faithful service.

Their reputation is world-wide. Whether you need an inexpensive sturdy watch for rough and tumble wear; a handsome jewelled model; or a reliable alarm clock; get an Ingersoll and you can depend upon it for years to come.



RADIOLITE SHOWS TIME NIGHT

The Hands and Figures glow brightly in the dark, a valuable feature for almost everyone, and particularly for boys in the dark room and under the pillow at night.

> Look for the dealer who displays the sign: ACCREDITED AGENTS FOR

INGERSOLL WATCHES & CLOCKS REFUSE SUBSTITUTES.

Dealers who offer you a substitute have an ulterior motive for so doing. Insist on an Ingersoll and buy it at the sign of The Ingersoll Accredited Agent.

INCERSOLL WATCH CO. LTD., Ingersoll House, Kingsway, London, W.C.2



Yankee Improved Radiolite 17/6
Plain Dial 12/6
Other Models ... 7/6 to 45/-

3/6

Cloth

Cover

GUARANTEED WATCHES AND CLOCKS



BUY YOUR INCERSOLL WHERE YOU SEE THESE SIGNS





ALL RADIO ENTHUSIASTS



Coloured Wrapper

A concise and reliable guide—helpful to the experienced and essential to the amateur. It explains how to choose the correct Aerial, how to make both Crystal and Valve Sets, how to use a Valve Combination with a Crystal, and expounds many knotty Wireless problems.

On sale everywhere, or post free, 3/9, from the Publishers, GEORGE NEWNES LTD., 8-11, Southampton Street, Strand, W.C.2.

l'he Hornby Tank Loco



We have pleasure in announcing that we have added a Heavy Tank Loco to the Hornby Clockwork Train system. A glance at the above illustration will show how beautifully this Loco is designed. It is thoroughly representative of the latest type of its class. Measuring 11½ in. in length, it embodies all the characteristics of the Hornby Trains.

Beautifully finished in colours: lettered L.M.S. and L.N.E.R. Fitted with reversing gear, brake and governor.

Price each ... 32/6

MECCANO LTD.,


BINNS ROAD

LIVERPOOL

Government Sky-Scraper

in Meccano

WHEN completed, the new Custom House at Boston, U.S.A., will be one of the finest buildings in Boston and will form an impressive landmark from the harbour. From a constructional point of view the building is interesting because it is being built on top of the existing Custom House!

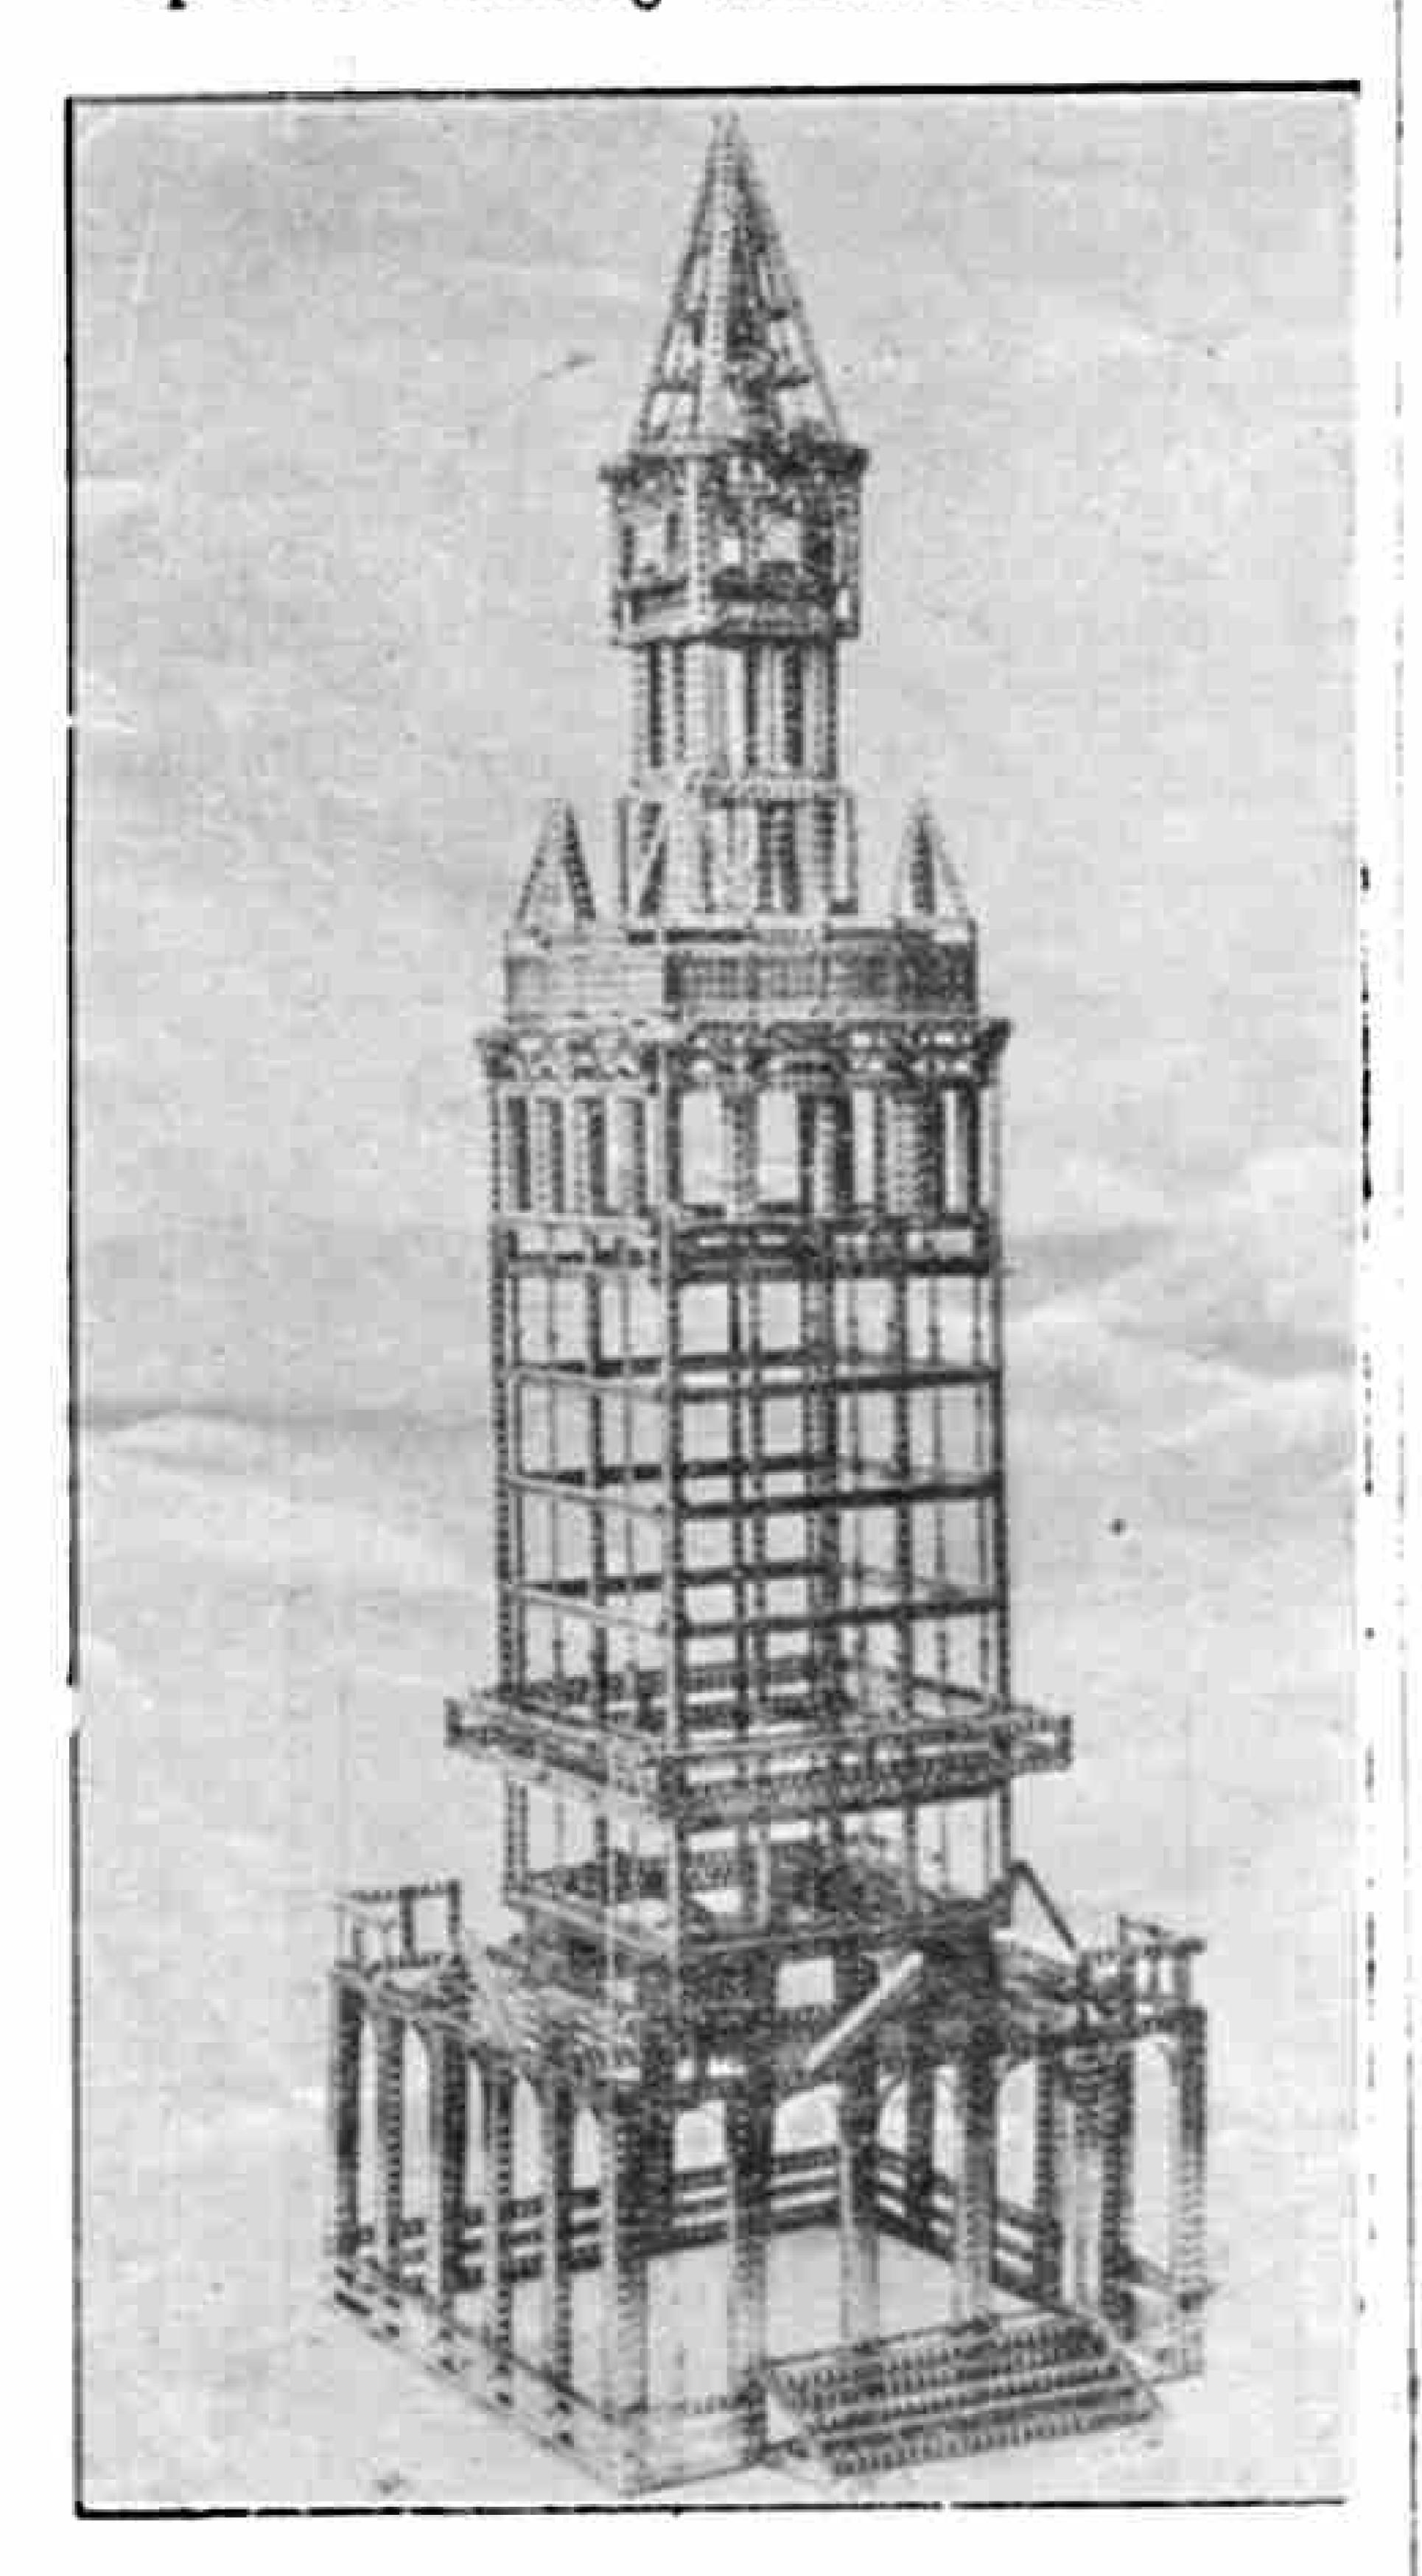

The model illustrated is the new Custom House at Boston, U.S.A., described in the accompanying article.

The original building, which dates from 1847, was surrounded by tall granite columns and surmounted by a low dome. The interior is of beautiful design and contains marble columns, supposed to have been copies from the monument of Lysicrates at Athens.


Boston is an important port, and its traffic has increased considerably every year. In 1908 it became evident that it was impossible to carry out the increased work from so small a building, but as the Government refused to purchase land to accommodate a new building, matters were at a standstill. At last, however, it was suggested that a building of several stories built on the existing colonnade, would not only accommodate the increased staff but would also result in preserving the splendid architecture of the old building.

This idea was officially sanctioned, and it was decided that the new building should take the form of a tower, above the central part of the old Custom House. The tower is to be 504 ft. in height, 65 ft. in width and 70 ft. in breadth. In order to provide a firm foundation for the great weight, massive concrete caissons have been sunk a hundred feet below the street level.

One of the most prominent features of the building will be an immense clock with a 21 ft. dial and an 11½ ft. minute-hand. The clock-face will be of reinforced concrete, marble, and bronze. The numerals and minute-dots are to be formed by slits in the concrete, opening into a room lined with white-enamelled bricks. From this room light will be reflected through the openings.

In the building, now in the course of erection, there will be approximately three times as much office space as in the old Custom House, and the new building will be fireproof throughout and equipped with all the latest modern appliances.

It is not surprising to find that the new Custom House suggested itself as the

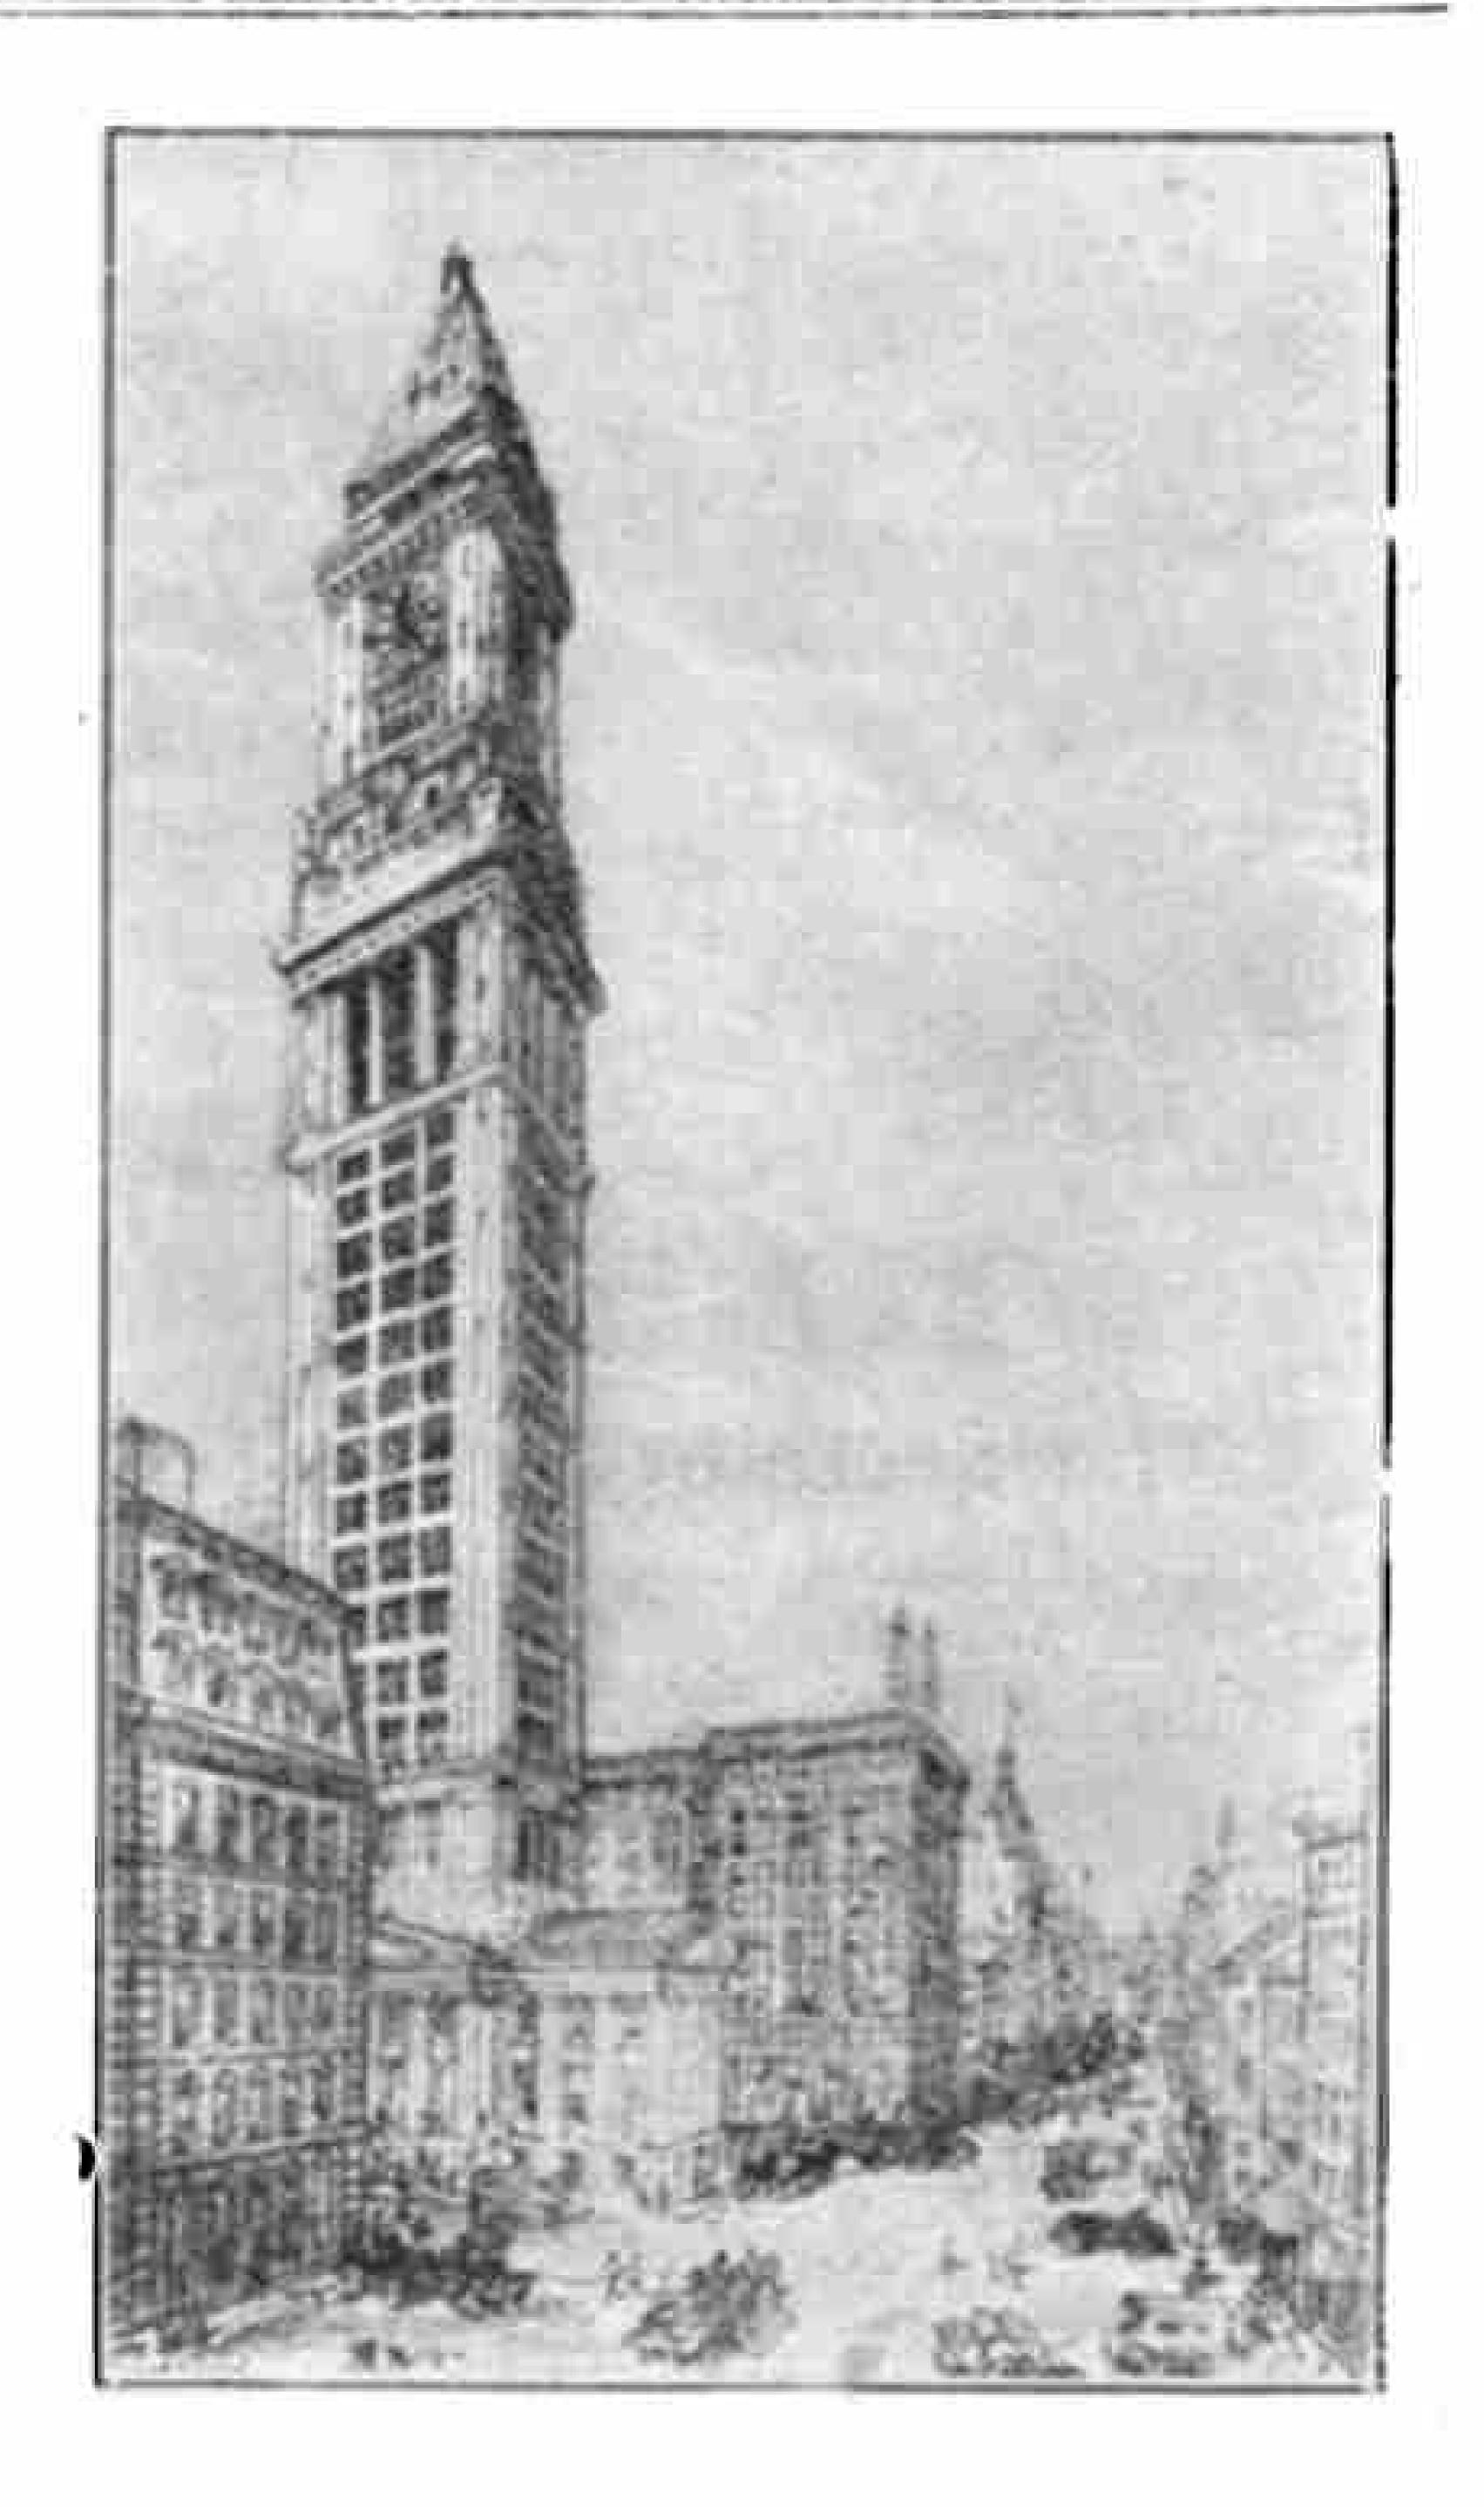

subject of a Meccano model to a smart American boy. We are able to illustrate his model, and a comparison of the two illustrations accompanying this article shows that the model is a very creditable reproduction of the original.





The Secretary's Notes

From time to time I receive letters from Secretaries asking for advice in connection with the raising of Club funds. There

ClubFunds is no better method of raising funds than by organising Exhibitions and Concerts, which always prove a

popular means of raising comparatively substantial amounts. In many cases Exhibitions and Concerts have been combined. and in this form also very successful appeals have been made. Exhibitions are best held towards the end of the Sessions, so that the members may work on their models for exhibition during the Session. Each member should undertake to provide at least one model for the Exhibition. Side shows may be organised and guessing competitions have proved both remunerative and interesting. For instance, a prize is offered for the best guess as to the number of parts employed in some particular model, or the number of Meccano nuts and bolts contained in a glass jug. With a little thought many other similar competitions may be arranged. It is customary for one or two prizes to be offered for the best model exhibited, and this leads to healthy rivalry and provides the members with some object for which to work. Parents and friends of members may be invited to these Exhibitions, being admitted at a moderate charge.

In addition to augmenting Club funds, functions of this nature arouse the interest of the general public in the work of the

Successful Concerts


Club. When Concerts are given in conjunction with the Exhibition, it is best to run them under the supervision

of the Club Leader, or one of his friends who is, perhaps, specially interested in such functions. Of course, where a Club runs a Concert Party or Minstrel Troupe in connection with the Club work, no difficulty is experienced in arranging a Concert at the shortest notice. In addition to raising funds for their own Club, many Clubs have loaned their exhibition models to bazaars, sales of work, etc., and Minstrel Troupes and Concert Parties have given entertainments in connection with local charities.

The Club Membership Cards for the Winter Sessions 1923-4 are now in my possession, and I shall be pleased to send

Overseas Meccano Harriers

Guild Meccano Football Cricket Teams have all been illustrated in these pages, and now I have pleasure in reproducing an interesting photograph of a pack of Meccano These Harriers. jolly-looking athletes are members of the Malvern (Johannesburg) Meccano Club, and a few weeks ago they held their first Annual Cross-Country Run.

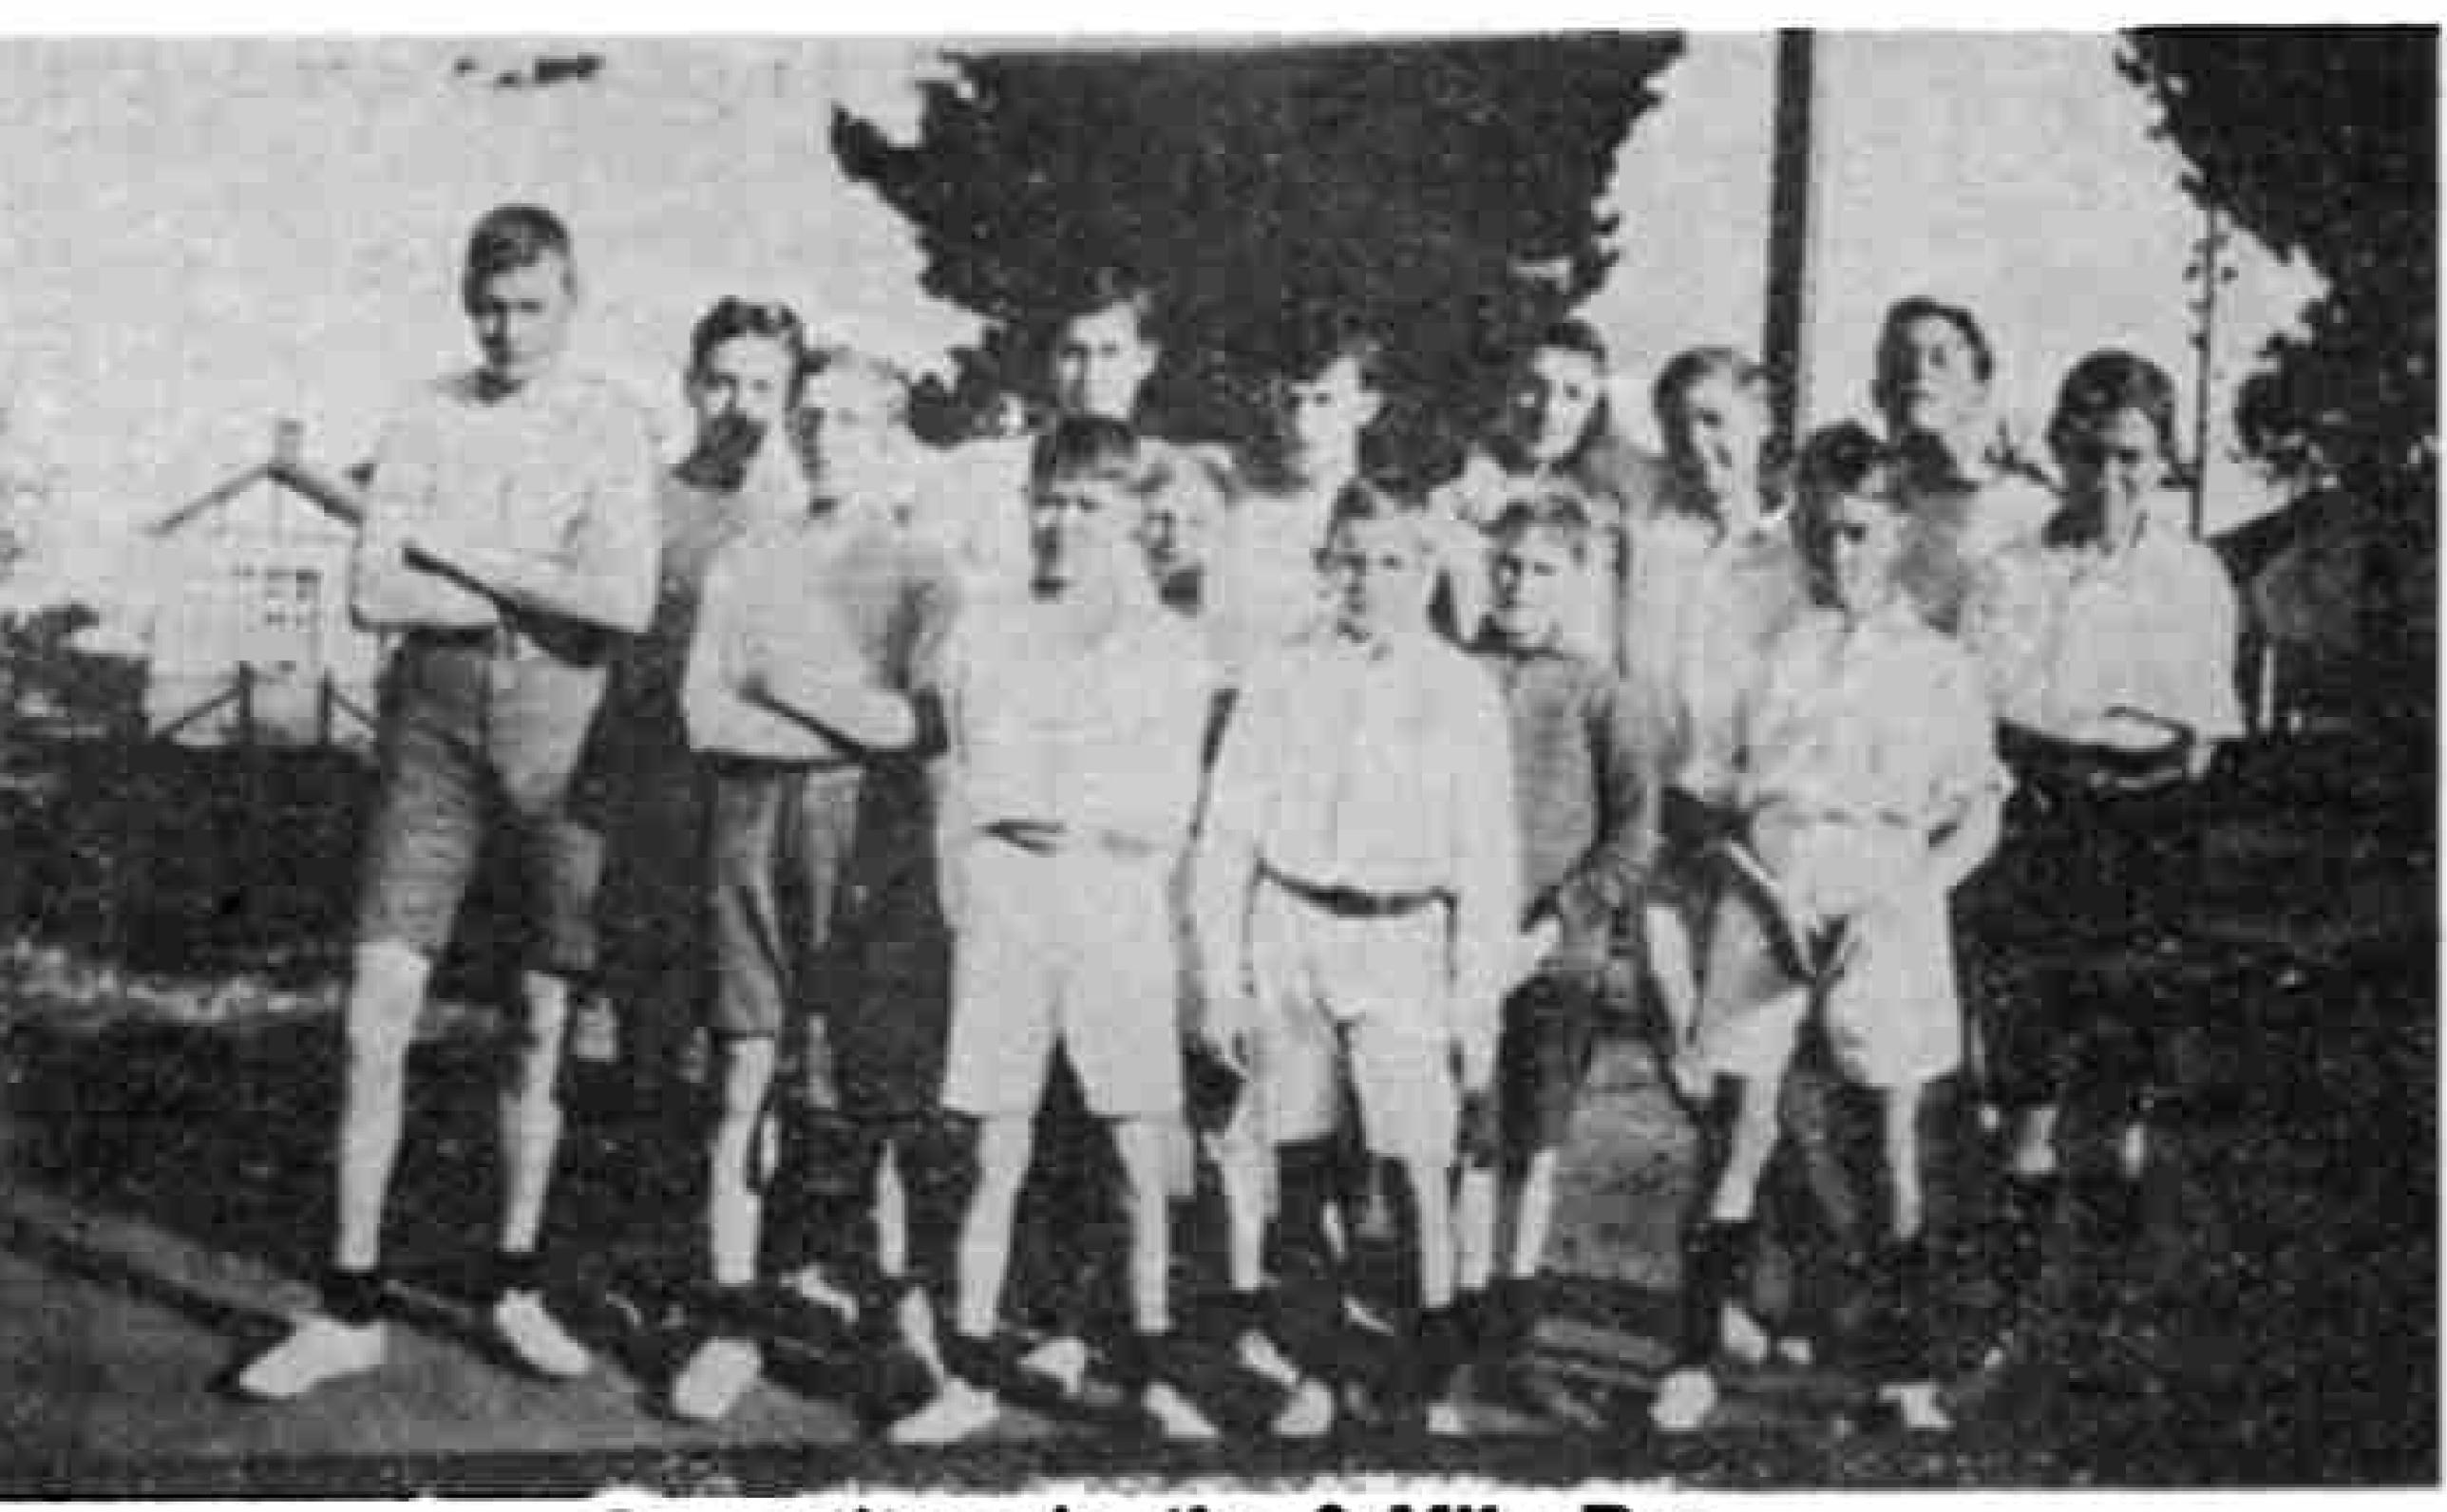

Competitors in the 9-Mile Run

Altogether there were 15 entries, and the first man got away exactly at 4 p.m., the remainder leaving at equal intervals up to 4.14. After a keenly-contested race Master H. Mumford began to draw ahead and finally arrived home first at 5.15. His time was I hour and 4 minutes with a start of 5 minutes. Master E. Sykes, who started from scratch, gained second place, with the excellent time of 1 hour and 2 minutes.

After the run the Club entertained to supper the members of the Jeppe Boys' Club, and finally a very successful meeting was closed by three hearty cheers for the Meccano Guild.

Club Membership Cards

all Club Leaders who have not already had their regular supplies. cards are tastefully printed in green, and include the rules

of the Guild with space for the insertion of the programme of Club meetings for the two Winter Sessions. Each affiliated Club is provided with a card for every member of the Club.

I am pleased to notice the increased activities in connection with the Correspondence Club. Guild members have long

felt that they belonged Correspondence to a great brotherhood of boys, each between having the same Members thoughts, sharing the same pleasures, and thrilled by the same ambitions. They often think of other Guild members in far corners of the earth. and wish that they might learn something of what they are doing in those far off countries. The Guild Correspondence Club makes this possible, and already many lasting friendships have been formed through its medium. Those members who are interested, and wish to take advantage of this opportunity of exchanging letters with other Guild members, should write to the Guild Secretary for further particulars.

I have several times had occasion to Guild members against begging letters received from abroad, and as the

Warning

practice seems to be on the increase I am again mentioning the The letters matter. come principally from

native boys on the West Coast of Africa who see the names and addresses of Meccano boys in the Meccano Magazine. either as prize-winners or in connection with the Guild. Sooner or later they ask for presents of fountain pens, silk handkerchiefs, etc., and offer to exchange native baskets and monkey-skins. advise all Meccano boys to ignore communications of this type.

Meccano Club Leaders

No. 7. Mr. L. LEWIS



Mr. I. Lewis is the Leader of (Wolverhampton) " Dudley M.C." This Club, inaugurated in October 1920, was affiliated with the Guild in February 1921, when Mr. Lewis accepted the Leadership. At present there are twenty-four members on the roll. The Club possesses a Wireless Outfit, and Mr. Lewis hopes to organise a Concert Party in connection with the Club next Winter. We have no doubt that, under his splendid leadership, this new departure will be a great success.

and seems

to be ther-

oughly en-

joying the

freshment

so strangely

adminis-

The prizes

n each

case were

Hawk - Exe

Cameras.

made by

the Kodak

Company.

Next month

we hope to

publish in

the "M.M."

liquid

tered.

CLUB NOTES

Leckhampton M.C.-Winter activities have now commenced, and as all the members are thorough sportsmen, a Football Team has been organised. The Club programme includes Lectures, Debates

and Model-building. Secretary: Master B. Rhodes,

Cotswold View, Charlton Lanc, Leckhampton, Cheltenham.

Ormskirk Wolf Cub M.C. The Summer Session included Cricket, walks, etc., and recently the members made a trip to Chester. Several models, including the High-Speed Ship Coaler and the Electric Loco. have been exhibited in a local dealer's window with gratifying results. The Club is in a sound financial position with a balance of over 16 and Meccano Setand parts to the value of over [20. Secretary: Senior Rover Master Chas. Walsh, 111, Wigan Road. Ormskirk.

St. Luke's (London, W. 10) M.C. During the Summer months the members were in camp for a couple of weeks at Beadenham, near High Wycombe. and the holiday proved a great success. An interesting programme is being arranged for the Winter Sessions. Leader and Secretary: Mr. J. P. Betts. 178, Wornington Road, N. Kensington, London, 10.

Herne Bay M.C.-Some enjoyable picnics were held by this Club during the Summer months, and a monthly meeting for model-building was well attended. Winter activities started on September 17th, and with every sign of a successful Session. Secretary: Master C. W. Russell, 4, Clifton Villas, South Road. Herne Bay.

St. John the Baptist's (Liverpool) M.C. Inc Winter Sessions commenced early this month, and meetings are held every Saturday evening from 7 p.m. until 9 p.m. in the Wellington Road Schools, Toxteth. Any boy who wishes to become a member should write to the Leader for further particulars. Club Leader. Mr. J. S. Lewis, 46, Durning Road, Liverpool.

Cobham M.C.—First Winter Session commenced with a membership of twenty. The programme includes Model Building, Swedish Drill, Games fournaments and Lectures. A Social Evening is being arranged for the close of the Session. Secretary: Master A. Phillips, The Fox and Hounds, Cobham, Surrey.

Barnetby (St. Barnabas) M.C.-Winter activities have now commenced, and as a means of increasing the membership, each member has been asked to bring a friend to the next club meeting. A stamp collecting section is proving a popular addition to the club's activities. Secretary: Master R. H. Ward, Laurel Villas, Victoria Road, Barnetby, Lincs.

Woodville (Thornton Heath) M.C.-During the Summer months a Cricket Club was organised, but now Winter activities have again commenced. As all the members are keen on Radio, this subject is being included in the club programme. Secretary: Master D. Morley, 12, Liverpool Road, Thornton Heath. Surrey.

Wynberg (S. Africa) M.C.—This Club was reopened early in September, and since then many interesting meetings have been held, including a visit to the General Post Office, Capetown. Reports received from the Secretary show that the Club is well organised, and it should continue to make rapid progress. Secretary: Mr. A. J. Lewis, Tea Rooms. The Park, Wynberg, near Cape Town, S. Africa.

Davenport (Stockport) M.C.-Mr. Main has unfortunately resigned from the Leadership, but another local gentleman, Mr. Massey, has accepted office. The members hope to perform the Meccano play "Nonsense Nana" at the close of the Winter Session. and rehearsals have already commenced. A Footbali Team has been organised, and is proving very popular. Secretary: Master A. D. Stoker, 124, Bramhall Lane, Stockport, Cheshire.

King Edward's (Birmingham) M.C. An interesting programme is being drawn up, and Meccano outfits are being carefully overhauled. A new Secretary has recently been elected, and it is intended to issue a Club Magazine very shortly. Secretary: Master A. lims, Albert House, 23, Key Hill, Birmingham.

West View (Nottingham) M.C.—The Leader informs me that the prospects for the Winter Sessions are very good, and that the members are as enthusiastic as ever. Special features this year are being made of Model Building, Games and Lectures. Locator: Mr. H. W. R. Cousens, 494, Mansfield Road, Sherwood, Nottingham.

Dudley M.C.—Good progress has already been made by this Club, and great interest is being shown in a Competition for the simplest and most efficient Wireless Set. All the members are keen and enthusiastic. Secretary: Master C Whitworth 19 Smith Street, Dudley.

Meccano Photographers "Get Busy"

Results of

FOURTH PHOTOGRAPHIC COMPETITION

CONSIDERABLE increase in the number of entrants and in the quality of the work rendered difficult the task of judging our Fourth Photographic Competition. On the whole

the subjects were well chosen and correctiv locussed and exposed, and altogether the standard of work surpassed that of any previous competition.

The winner of class A is Gerald Rennison of East V i e w

success-

ully.

Generally

it comes

out blurr-

e d or

foggy, but

in the

winning

photo-

graph

clearly

B Master

Baker, of

24, Had-

dock's

Hill

Sidley

takes the

prize. His

photo-

graph

In Class

Ε.

ripple

seen.



Photo hyl

Seaton Delaval, with the happy snap

"Crossing Ships." This is an excep-

tionally clear photograph considering the

view chosen; for moving water is at the

best of times very difficult to photograph

"The Foster Mother"

The subject is one of which we often read.

where the mother sheep has died and

the young lamb has to be reared with a

bottle. In this snap the lamb is evidently

quite at ease with its new 'parent'

J. F. Baker

the photographs that secured the in each section.

Those competitors who entered photographs in the competition but who were not fortunate enough to secure prizes

should not be discouraged, but should enter our Fifth Photographic Competition, particuars of which are announced page \mathbf{on} 161.

Entries are particularl y invited from our Overseas readers for these

Photo by]

"Crossing Ships"

Master G. Rennison

entitled "The Foster Mother" is certainly a very interesting piece of work.

petitions, and a specially late date has been arranged for the Overseas sections.

Buckfastleigh M.C. The indoor Sessions recently commenced, and the club room has been brightened up by decorating the walls with Meccano coloured posters. It is hoped to make this a record Session. Secretary: Master H. Parsons, Bell Cottage, Buckfastleigh, S. Devon.

Club Recently Affiliated

Ethersall (Nelson) M.C.—This Club has already made good progress, and the first Club Exhibition was held on October 16th. The members are very proud of the fact that in a recent Swimming Gala at the Nelson Schools, Master Fred North, a member of the Club, came in second in the final for the nestest breast-stroke. The Dramatic Section of the Club recently produced "The Death of Mark Antony." Secretary: Master H. Dewhurst, 145, Waids House Road Nelson Lincs.

A Forthcoming Exhibition

An interesting Exhibition of Mechanical and Eu gineering Meccano Models is to be held by the St. Mary (Newington) Meccano Club on November 21/22 commencing at 3 p.m. All Guild members living in London should make a note of this date and visit the feast of good fun and enjoyment that is being prepared. There will be stalls showing Meccano models, Hornby train sets with the latest rolling stock, and a full size model of the wonderful Grandfather's Clock illustrated in this number. The address is St. Mary's Parochial Hall, Kennington Park Road, S.E.11, and can easily be reached by bus, tram or Underground railway.



e All-About Splendid Series of original and 32 illustrations. Each

All About Treasures All About Inventions of the Earth

FREDERICK A. TALBOT

The story not only of gold and the way man sacrificed all to find it, but also of other well-guarded treasures. and the way in which they are wrested from the bowels of the earth.

and Discoveries

FREDERICK A. TALBOT

The story, written brightly and as untechnically as possible, tells of the romantic development of the Telephone, Wireless, the Typewriter, the Atmospheric Brake, Food from the Air, the Steam Turbine, Oil and Coal Gas, etc., etc.

EDWARD CRESSY

Every type of engine and its accessories, locomotives, marine engines and pumps, internal combustion engines, gas, oil, petrol, and the Diesel engine are explained here in a

About Engines All About Railways

F. S. HARTNELL

"As interesting as a novel though much more instructive, 'All About Railways' should win for itself a high place as a boys' book for its contents, illustrations, and handsome exterior."- Evening Standard.

Cassell & Co Ltd La Belle Sauvage EC4.

GIRL can afford to be without the world-renowned largely-advertised

WRedd. Trade Mark)

Tubes 4}d., 6d., 9d. Everywhere.

The best general adhesive the world knows. For wood, leather, bone, paper, etc., objects large or small. Used in bulk for manufacturing purposes. Of great utility to boys and girls who long to make things.

FIRMAS (Heat Seccotine)

(Regd. Trade Mark)

Tubes 6d.

For glass, china, delph, etc. Articles joined with it can be boiled without coming asunder.

The LINENHALL WORKS, BELFAST.

Telegrams: "CLACIER, BELFAST."

Telephones: 4261 (3 lines).



and several new contests of interest will be announced in our future issues. Elsewhere on this page particulars are given of the £250 Champion-ship Contest for the best models, which every reader of the "M.M." should enter.

New Essay Competition

I am able to announce a new Essay competition the subject of which is :-

"WHAT I INTEND TO BE, AND WHY."

Everyone of our readers has his ambitions, and no doubt the majority already have decided what they intend to be. Many wish to be Engineers or Electricians. Some have a taste for farming or wish to go abroad as Planters or Ranchers. Others wish to be Soldiers or Sailors, or to enter one of the professions and become Doctors, Lawyers, Accountants, etc.

Every boy has his place to fill in the great scheme of life, and I feel sure it will be of interest to learn what Meccano boys intend to be, and also to know why they are choosing that particular walk of life.

Essays, to be written on one side of the paper only, should not exceed 1000 words. A prize of Meccano goods to the value of £1/1/- (to be chosen from our current list) will be awarded for the best essay, and three Hawk-Eye cameras (taking pictures 3½" × 2½") made by Kodak Ltd., to the next best. The winning essay will be published in the "M.M."

Closing date, 31st January, 1924 (Overseas 31st March).

Fifth Photographic Competition

This competition closes on 30th November (Overseas: 29th February, 1924), and is divided into two sections (A) 14 years of age and under, and (B) over 14 years of age. The subjects are (1) A Family Group, (2) An Animal Study, (3) Miscellaneous Section. The First Prize in each section is a Hawk-Eye Camera (taking pictures 3½" × 2½") made by the Kodak Co.

Puzzle Column

We shall commence a Puzzle column, particularly appealing to Guild Members, in our next issue. Prizes will be offered each month for the best puzzles submitted.

Tom Sawyer Result

Three contests closed on 30th October. The entries for two of these, the Holiday Essay and Photo Essay competition, are now being classified, and the results will be announced in our Xmas number.

The winner of the "Tom Sawyer" competition is Master Albert E. Bebb, of Redditch, whose sensible comment reads:—

"I should say that the chief point of the Tom Sawyer story is that Tom used his brains and turned what would otherwise have been work, into pleasure.

"It shows us also that to do our duty brings its own reward, as although Tom did his duty reluctantly, he was amply repaid.

"Another point is that we always desire most that which we cannot have. The boys would not have wanted to whitewash the fence unless Tom had made them think that it was a pleasure to him."

A No. 1 Meccano Radio Receiving Set has been despatched to the winner, and I hope he will spend many happy hours listening in to broadcast from the Birmingham station. A second prize of Meccano goods to the value of 5/- has been awarded to Miss Dickie Jones, of Gloucester, who also sent a very sensible comment.

Are You an Artist?

In response to numerous requests received from Meccano boys, I have pleasure in announcing a Drawing Competition. As mentioned in this month's Editorial on page 141, the subject of this competition is to be: "The Editor of the 'M.M.' as I imagine him to be." In this competition the drawings may be of any size and the subject may be treated in any manner desired, i.e., it may be either in black and white, pencil, crayon or wash.

There are no restrictions, except that the drawing must, of course, be the unaided work of the competitor. The competition will be divided into two sections:—

- (A) Boys under 12 years of age.
- (B) Boys of 12 years of age and over.

A prize of a Hawk-Eye camera, manufactured by the Kodak Company, will be awarded in each section. The closing date is 31st January, 1924, in the United Kingdom, and for entries Overseas, 31st March, 1924. I hope to receive a large number of entries for this, our first drawing competition, which, if well supported, will be followed by other similar competitions. The winning drawings will be published in the March "M.M."

CHOOSE YOUR OWN CHRISTMAS PRESENT

It is a wonderful sensation to sit down and study illustrations and descriptions, and select your own Christmas present. Try it! The Christmas Double Number of the "M.M." will contain advertisers' announcements of all kinds of splendid toys, books, and all manner of articles for giving pleasure to boys at Christmas. We are going to make at least one boy happy by giving him just the very thing he wants, from amongst the articles advertised in our columns.

Let us know what you want— On a Postcard

Obtain a copy of the Christmas number of the Meccano Magazine, which will be ready on December 15th, look at all the

articles advertised and then decide which you would like the postman to hand to you on Christmas morning. Write the name of it on the top of your postcard, marking it No. 1. Then write the name of the article that you would like second best and mark it No. 2. Do this with six articles altogether, write your own name and address at the bottom in very plain letters, and send the postcard to "Christmas Presents, Meccano Magazine, Binns Road, Liverpool."

To the boy whose list corresponds most nearly in order of merit with the total voting we will post the article that heads his list, to reach him on Christmas morning.

"Christmas Presents" postcards must reach us not later than December 20th.

MECCANO £250 CHAMPIONSHIP CONTEST 21 Cups and 460 Medals

In the 1923-4 Model-Building Contest 21 Championship Cups, 110 Silver and 350 Bronze Medals will be awarded, together with a number of Special Certificates of Merit. The total value of the prizes will amount to £250. The various countries have been divided into seven groups, and these, again, are divided into sections according to the age of the entrants.

The awards will be made for the best models submitted—particularly for those models that embody ingenious and original features. The winner of each cup will hold the title of "Meccano Champion" for his particular group and section for twelve months. The cups, which have been designed for us by a well-known firm, are of superb quality, and very handsome in appearance. Each cup will be engraved with the name of its winner, and provided with a suitable pedestal.

Meccano Gold Medallist.

The competitor who submits the best model in the entire competition will be awarded a specially-designed Solid Gold Medal. He will be the "Meccano Gold Medallist" for a year, and his name will be engraved on the medal, which will, of course, remain his property. Full particulars and entry form may be obtained from any Meccano dealer, or will be mailed (post free) on request to the Editor.

Model Building Competitions

In last month's Magazine we printed a list of dealers who are arranging Meccano Model-Building Competitions for boys living in their districts. Below we give a further list. Full particulars, together with an entry form, will be supplied by any of the dealers on application.

ASHTON-UNDER-LYNE

S. Harrison Ltd., 43/5, Market Street.

BATH—Barley & Sons, Centre of Corridor.

BURNLEY—W. H. Frost, 179, Colne Road.

BURY—Sam Taylor, 16, Silver Street.

CHELTENHAM—Pantoys Ltd., 7, Promenade.

EDINBURGH—Thornton & Co., 78/9, Princes Street.

KINGSTON-ON-THAMES—

Stirling Ltd., 17, Clarence Street.

LEEDS—J. S. Savile & Co., 12, Otley Road.

LEIGH—H. M. Morris, 10, Market Street.

LONGTON—Hughes & Harber Ltd., The Royal Press.

MORECAMBE—A. Edmondson, 35/7, Queen Street.

NELSON—Robinson, 8, Market Street.

NORWICH—R. E. Pilch, Brigg Street.

ROTHERHAM—Wallace Heaton Ltd., High Street.

SITTINGBOURNE—Cleaver, 53/59, West Street.

WIGAN—J. J. Broughton, 76, Market Street.

Competition Closing Dates 1923 30 Nov. Fifth Photographic. 1924 31 Jan. Essay. Drawing. 15 April £250 Championship. Overseas Closing Dates Holiday Essay. 1923 30 Dec. Photo Essay. Fifth Photographic. 29 Feb. 31 Mar. Essay. Drawing. (250 Champtonship.

Who are the lucky ones?




To whom is "SUNNY JIM" taking this jolly breakfast? Count the plates. There are seven of them. Seven lucky boys and girls are going to breakfast off "FORCE" and hot milk. To think of it is to smell the fragrant aroma of the malted whole wheat as it rises up from the steaming plates. What a breakfast!—or lunch—or supper! They might even have it with fruit! You might have had some, too, if you had persuaded mother to get it for you. Tell her it's wholesome whole wheat—she can't refuse you then, because it is so good for you. All grocers sell "FORCE." If you've never tasted it, send for the free sample.

FORSTED MALTED WHEAT FLAKES

FREE

Send Post Card to A. C. Fincken & Co., Dept. A.Y.3,197, Great Portland Street, London, W.1.

Indoor Games of all kinds

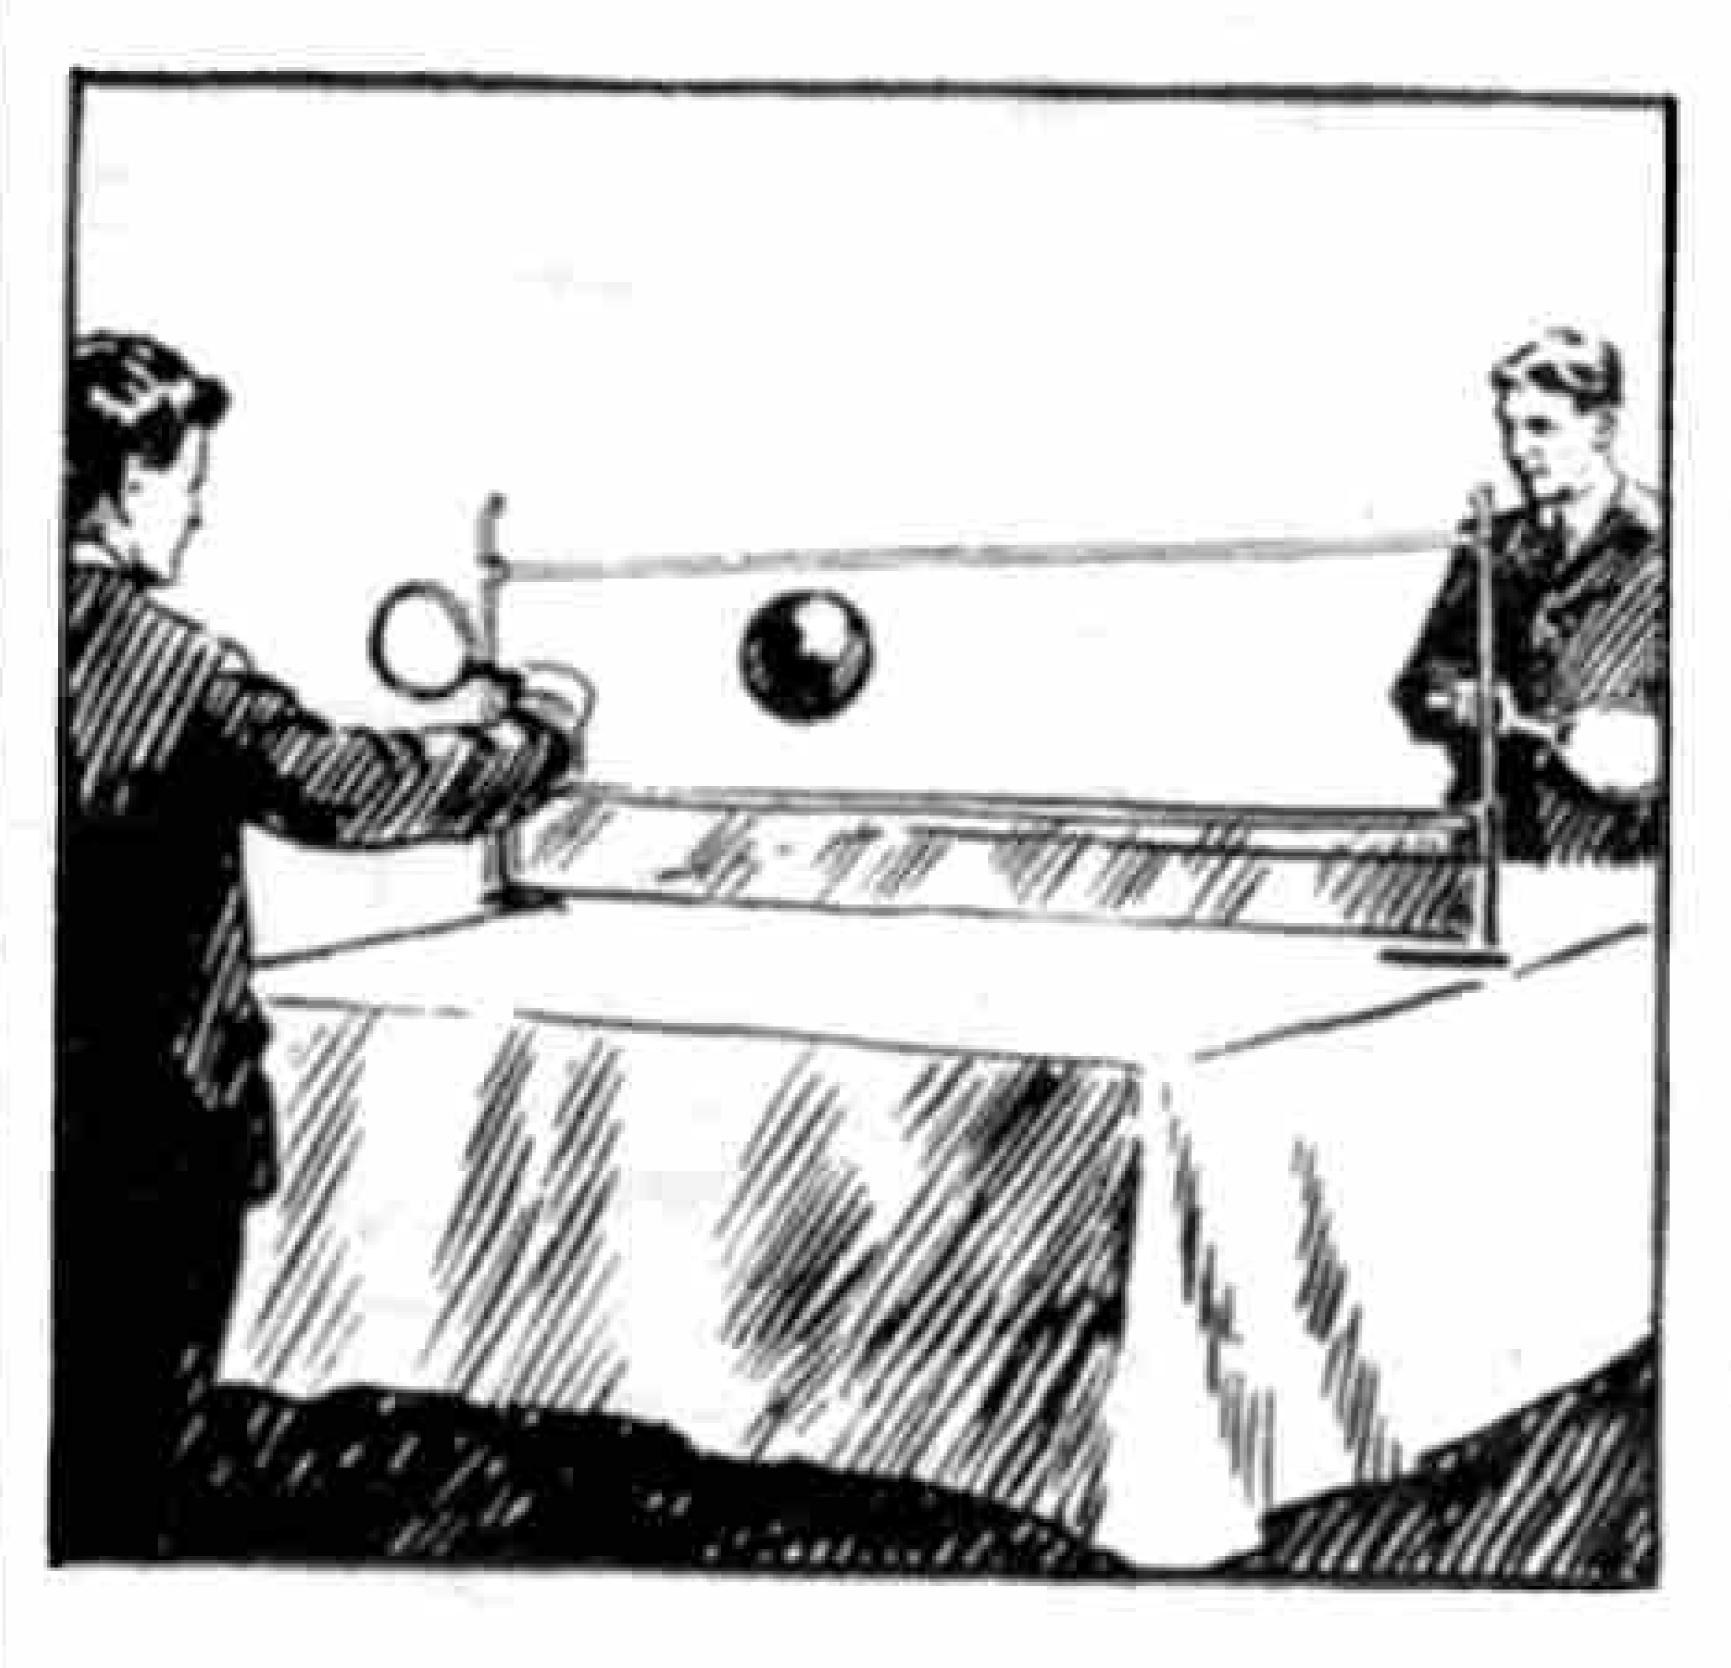

MINIATURE BILLIARD TABLES

of various sizes.

A Ready Seller


The Air Ball Game
Great Fun.

Badminton Piladex

Played somewhat similar to Table Tennis but with air ball—no noise when ball struck, and ball is seldom on the floor.

Send for Full Particulars :-

ROBERTS BROS., Glevum Works, GLOUCESTER

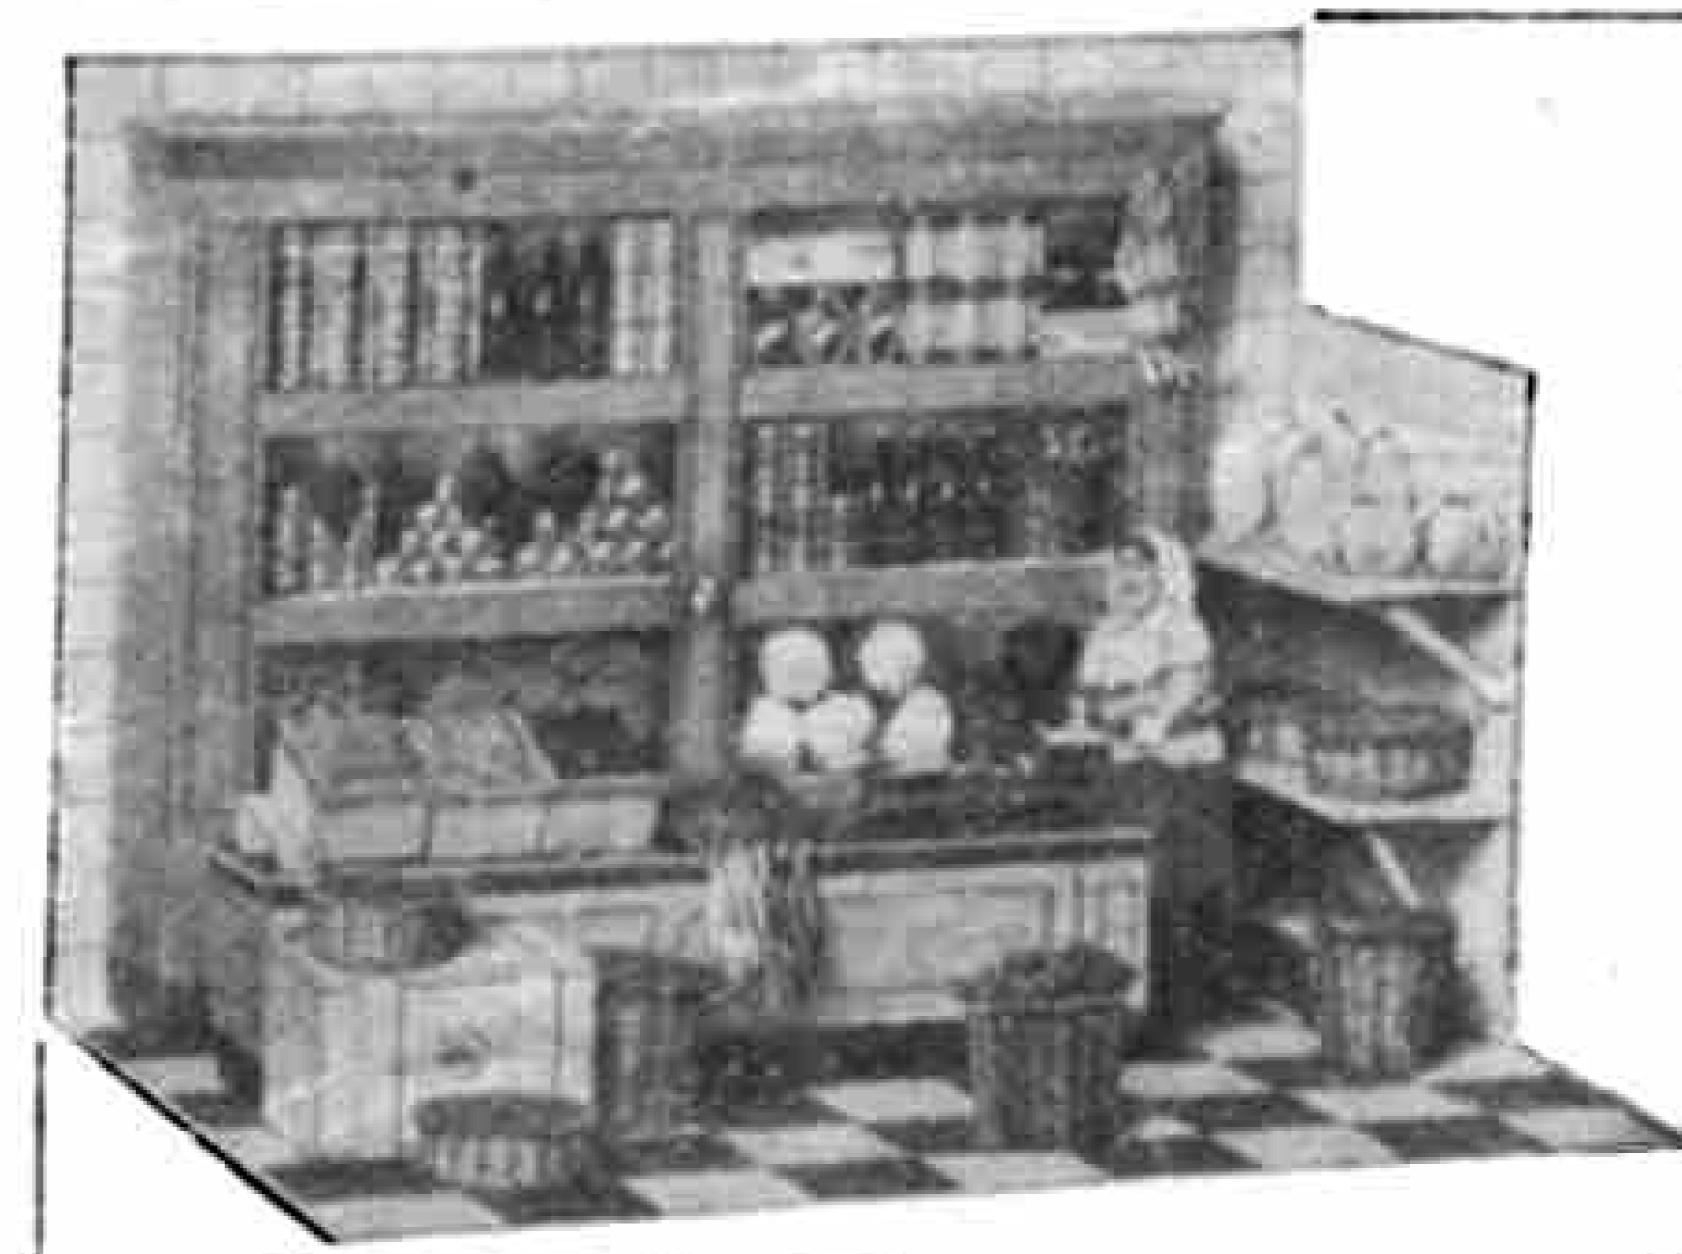

Dean's Youngsters Modeller 1/- each. Size, 84 × 11 in.

An entirely new series. Each book has all the necessary material for making into the finest models, in full colours:—

No. 1. A SPLENDID KITCHEN, with stove, sink, table, pots and pans complete.

No. 2. A WELL-FILLED GROCER'S SHOP, with salesman, counter, cupboards and goods displayed in the most attractive way.

No. 3. A BEDROOM with all the necessary furniture.

No. 4. A GREENGROCER'S SHOP, with sales-woman, counter, greengrocery, baskets and scales.

Full directions gwen:

Very casy to make 14.

Just the thing for the Present-day Youngster

Dean & Son Ltd., Debrett House, London, W.C.2

Small Advertisements

(For Advertising Rates see page 168)

FREE!! FREE!! FREE!!

For 30 days only I am presenting all applicants for approvals with a Grand Pictorial Packet containing New Issues, Airpost, etc. Write to-day and save disappointment.

L. C. Jones, 13, North Road, Bourne, Lines.

50 DIFFERENT. FREE. Persia, Travancore, West Russian Army, Togo, German Austria, Brit. Cols. Postage. Stammers (Dept. M), 51, St. George's Rd., Leyton.

1000 ASSORTED STAMPS. 1000 Mounts. 3 Packets Stamps. Price 2/-. North Bros., Bostock Avenue, Abingdon.

STAMP BARGAINS.

New German Provisionals at low record prices. Set of 22 different surcharges up to 2 million marks. Price 1/- only. Others without surcharge including the 5 million marks. Set of 14, 1/-

Danzic also offered at bargain price. First issues, bi-coloured, surcharges to millions, etc., 25 different for 1/-.

Other Bargains. 200 all the world, 35 U.S.A., 30 Czecho, 35 Bavaria, 20 Finland, 6d. each lot, and each lot different stamps. Fine approvals, 6d. in 1/- disc't. H. E. UPSON, 32, Norman Road, Canterbury.

14/- PACKET FREE

We will send absolutely FREE a packet of 110 WAR REVOLUTION AND ARMISTICE STAMPS including many pictorials and unused sets, catalogued by Gibbons at 14/- to all genuine applicants for our Approvals, which contain a fine lot of stamps from a 4d. each. Space will not permit any description, but send a POSTCARD and be delighted.

R. WILKINSON, Provincial Buildings, COLWYN BAY.

10,000,000 MARK UNUSED GERMAN STAMP FREE to all applicants enclosing 3d. postage for our Approval Sheet 2 M. SEVERS & JENKINS, 2, rue de Meridien, BRUSSELS.

FREE—WITH APPROVALS—25 different, including Congo (1923), Kenya, Cyprus, Konang-Teheon, Oubangui (1923). Glass, 72, Birch Rd., Southville, Bristol.

100,000 GERMAN MARKS FREE With every "M.M." pkt. of 50 guaranteed diff.

MOORE, 6, Seymour Road, Broad Green, Liverpool

MILLIONS

Every genuine applicant for an approval selection enclosing postage will receive the 1, 2, 3 and 5 Million Mark Mint Danzig Provisionals Free.

H. Llewellyn, 41, Dereham Road, Norwich (Member J.P.S.)

SETS AND PACKETS.

100 Austria, 1/-; 50 German, 1/-; 50 Roumania, 1/-; 30 Finland, 1/-; 100 United States, 1/-; 50 Spain, 1/-; 500 Postage, 5/-; 500 Revenue, 5/-; 50 Cards and Envelopes, 1/- 50 Railway Parcel Stamps, 1/-.

Large number of Approval Sheets ready of either Postage or Revenue, at large reductions off catalogue. Postage on Packets and Sets extra.

I. Russeil, Chetwynd, Shanklin Drive, Westeliff-on-Sea.

NORRISCO BARGAINS B

All postage extra. Full Satisfaction Guaranteen on everything ordered from us, or cash refunded.

123 BAVARIA, Ludwig issues complete, mint, perf. and imperf. (the perforate stamps are alone catalogued £4/17/9), only 5/500 diff. BRITISH COLONIALS, 18/6; 1,000,

(4/5/-: 1,500, £10: 2,000, £18. 500 dlff. FRENCH COLONIALS, 30/-; 750, £3/7/6; 1,000, £6/3/6; 1,500, £18/10/-.

300 diff. PORTUGUESE COLONIALS, 19/-; 500, 45/-; 1,000, £7/10/-; 1,200, £13/10/-. 500 diff. WAR & NEW EUROPE, 7/-; 1,000 30/-; 1,500, £3/10/-.

28-page Illustrated Price List of Bargains, with Pocket Book and Perforation Gauge, Free on Request.
COLLECTIONS OF COUNTRIES for sale at 1 to

NORRIS & CO. (Dept. M.M.), LEABROOKS, Alfreton, DERBYSHIRE, England.

FREE!!! To appro. applicants sending 3d. 20 diff. stamps incl. Belgium TIN HATS, 1000 hinges, dup.book and perf. gauge with waterm'k detector. HENRI LOUFS, GRANDHEZ, MUNO (Belgium). Mention "M.M."

30 DIFFERENT STAMPS FREE, including sets 7 Japanese, 6 Denmark and 2 German Air Post to approval applicants. Hook Bros., 26, Vale Road, London N.4.



Buying Packets

N our last issue we discussed what kind of postage stamps to collect in view of the fact that there are so many kinds other than those used for sending letters or packages through the post. We decided that perhaps the best plan is for the young collector to give his first attention to ordinary postage stamps, while collecting also any specimens of the less usual stamps that may come his way. The best way to begin a collection is to buy the largest packet you can afford. You may buy packets of stamps of the kind you want at anything from 1d. to £1,000 or over, so that prices may be truly said to suit all purses! Do not buy a 2/6 packet this week, however, and another 2/6 packet next week. If you do, there are certain to be many duplicates, or second copies, in the second packet. It is better to buy no stamps this week and a 5/- packet next week, so that you will obtain only stamps that may be put in your collection.

Tongue Twisters!

In regard to increasing the size of your collection and the best method of mounting your stamps, we shall have more to say later. At present the main thing is for you to start your collection. Meanwhile, having purchased your packet, do not be in a hurry to buy an album and stick the stamps in. Devote your energies to trying to arrange your stamps into their respective countries by studying them. Read all the inscriptions. Most stamps have the name of the country on them somewhere. even if it is not in English spelling. It the name looks peculiar, try pronouncing it aloud, for you can often find out the name of the country to which a stamp belongs by doing this, and at the same time afford considerable amusement to yourself and friends by trying to pronounce some names such as Djibouti. Cesko-Slovenska, Azerbaijan, Chimborazo, and Kiautschou!

Identifying Names

Not all stamps bear the name of their place of origin in English spelling or even in English letters. With few exceptions, however, all the countries of the British Empire are named in English or in a form almost as easy to read.

Sometimes the name of the country differs on various issues, such as Rhodesia. On the earlier Rhodesian stamps the name appears as "British South Africa Company," a fact very likely to confuse collectors who are unable to find that name in their catalogue. In the album, however, both kinds of stamps are mounted under "Rhodesia."

"Oranje Vrij Staat" is easy to identify if you follow the hint to try pronouncing the name of the country aloud. Miss out the "j" of "Vrij" and you hear yourself say "Orange Free State!" Another puzzling South African colony is the Transvaal, which appears on its earlier stamps as "Zuid Afrikaansche Republiek," or, abbreviated, "Z. Afr. Republiek." This is the Dutch for "South African Republic."

Four Chief Groups

It will be found that the stamps of foreign countries may be divided into four main groups: (1) those on which the name of the country is in English spelling or nearly so, (2) those on which although the name is not n English it is in letters of the English alphabet, (3) those on which the name is in a foreign alphabet, and (4) those bearing no name of country.

The first group should offer no difficulty. It is easy to see that "Brasil" stands for Brazil, "Island" for Iceland, "Nederland" for the Netherlands (Holland), "Romania" for Roumania, and so on. Here, again, pronouncing the name aloud is a great help.

Sometimes the origina name of the country is changed by an overprint. When this is the case the overprinted name is the latest, and therefore the one under which the stamp is to be classified. The term "overprint" denotes some inscription that alters the usage of the stamp, but not its value. On the other hand, a "surcharge" is an overprint that alters or confirms the value of a stamp.

The word "Française" or "Français" appears on nearly all French colonial stamps. Do not be too hasty, however.



An overprinted stamp to be classed under Togoland. The original stamp belonged to Dahomey, but also had the word "Francaise" on it.

in calling these stamps French, but look for other names. the name of another country appears, that is the one to which the stamp belongs. If there is no other name, then the stamp is French. Bear in mind, also, that "Franc" is the name of a coin as well as an abbreviation of francais."

The South American state of Bolivar, now a part of the Republic of Colombia,

at one time issued postage stamps of its own. The country was called Bolivar in honour of a hero of that name, whose portrait and name often appear on stamps of other countries. Accordingly, whenever you come across a stamp bearing this name, see if there is another name as well; if so, this latter is the heading under which the stamp is to be classified and "Bolivar" is here used as the name of a person only.

NEXT MONTH:

STAMPS with "UN-ENGLISH" NAMES

A Handy WORK BENCH


and How to Make it is only one of the many items in



for NOVEMBER, 1923 that will appeal to Meccano Boys

OTHER SPECIAL ARTICLES include:—

THERMIONIC VALVES and Their Application in Wireless

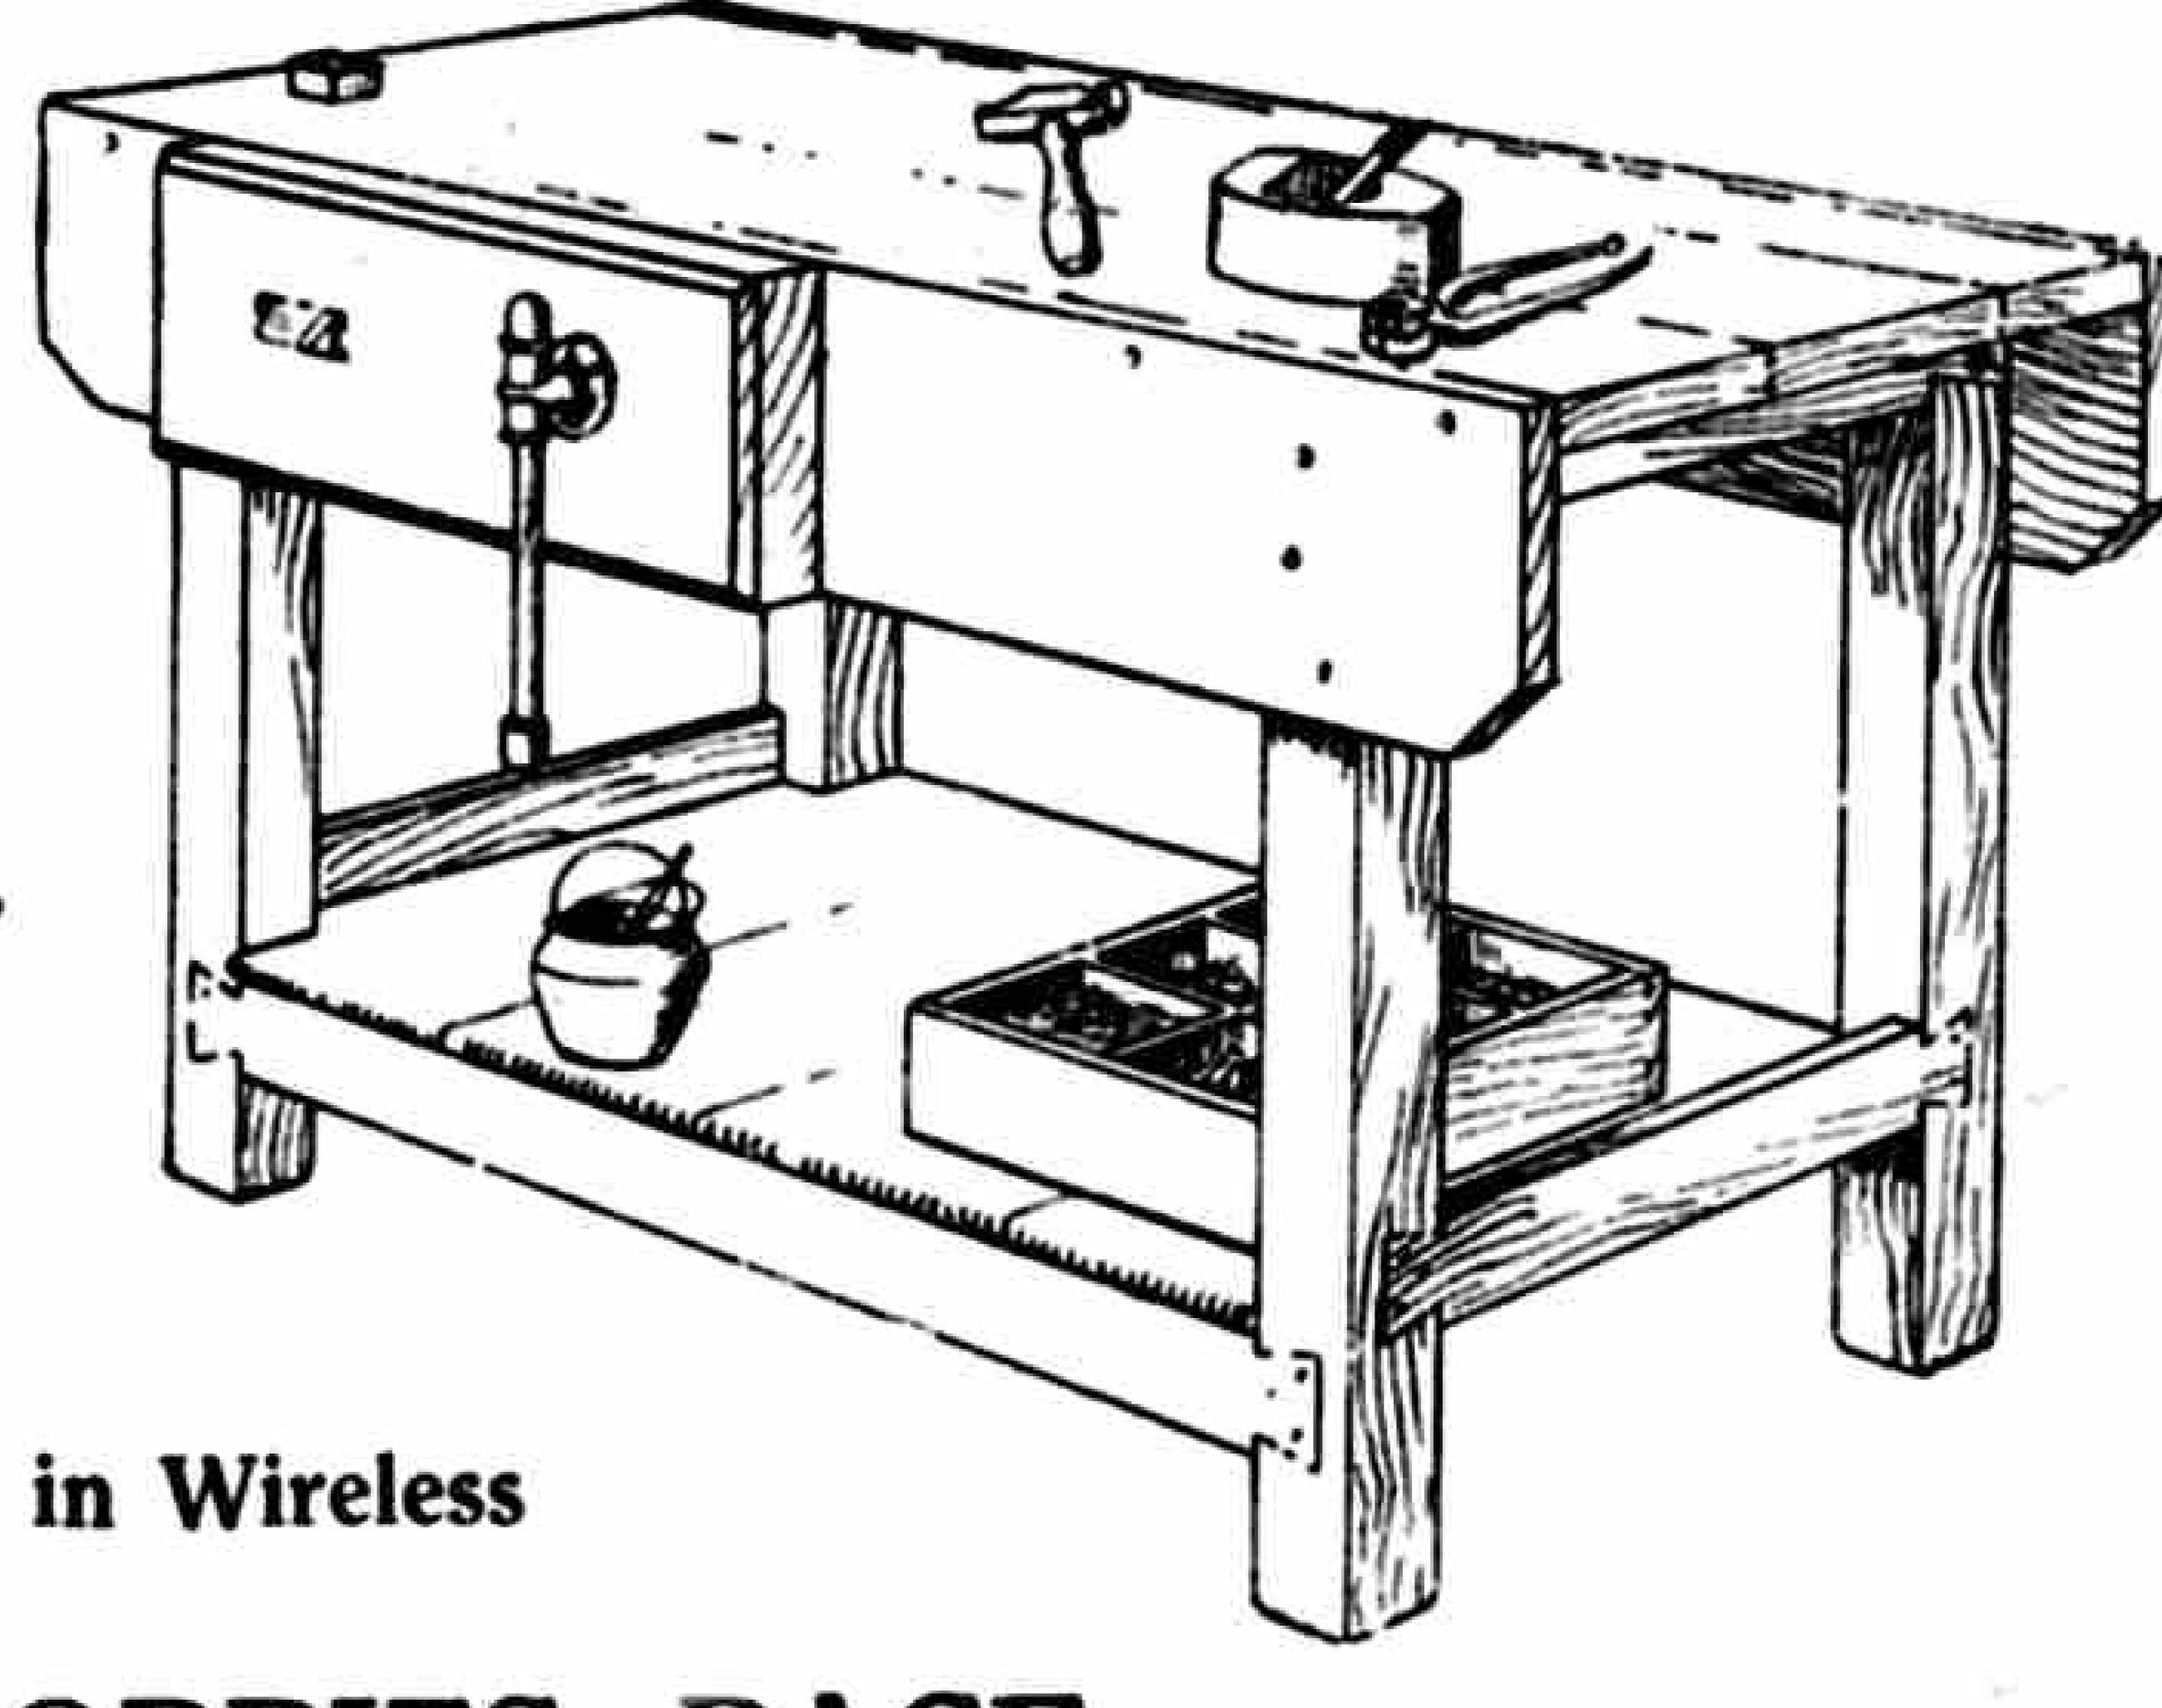



HOBBIES PAGE:

Notes for the Coin and Curio Collector, Model Maker, &c.

THE ART OF JU-JITSU. :: :: COMPETITIONS THREE RATTLING NEW SERIALS, COMPLETE STORIES

and a whole host of other attractions.

1/- monthly—and worth it!

Published at The B.O.P. Office, 4. Bouverie Street, London, E.C. 4. OF ALL BOOKSHOPS, &c.

PARTRIDGE

The House for Stirring Books for Boys

All artistically illustrated both in Colour and Black and White



HEAD OF THE SCHOOL.

HAROLD AVERY.

magnificent school

DREAD-NOUGHT THE AIR. 5/-

PERCY F. WESTERMAN.

An amazingly sensational story of the piracy of the air.

SINCLAIR'S LUCK.

By PERCY F. WESTERMAN.

A rousing story of adventure in East Africa.

THE FIFTH FORM DETECTIVE. 3/6

BY ROWLAND WALKER.

The same Author as that fine book, "Pickles of the Lower Fifth." Crammed with school-life adventure.

PARTRIDGE & CO., LONDON, E.C. 4.

Please send for Illustrated Catalogue

THE MYSTERY OF STOCKMERE

SCHOOL. By PERCY F. WESTERMAN. 2/6

Full of rippling fun and incident such as boys delight in.

THE PIGEON'S CAVE.

By J. S. FLETCHER.

A great smuggling story, told by a master craftsman.



By L. G. MAINLAND


(" L.G.M." of "The Daily Mail. (1)


Boys, you will want to know how a Polar Bear baited an umbrella trap! You will treasure this great book of true and amazing stories, which for interest and rollicking fun cannot be beaten.


LOTT'S BRICKS

of Beautifully Made Artificial for Constructing Buildings from Plans by an Eminent Architect.

A DELIGHTFUL BUILDING GAME

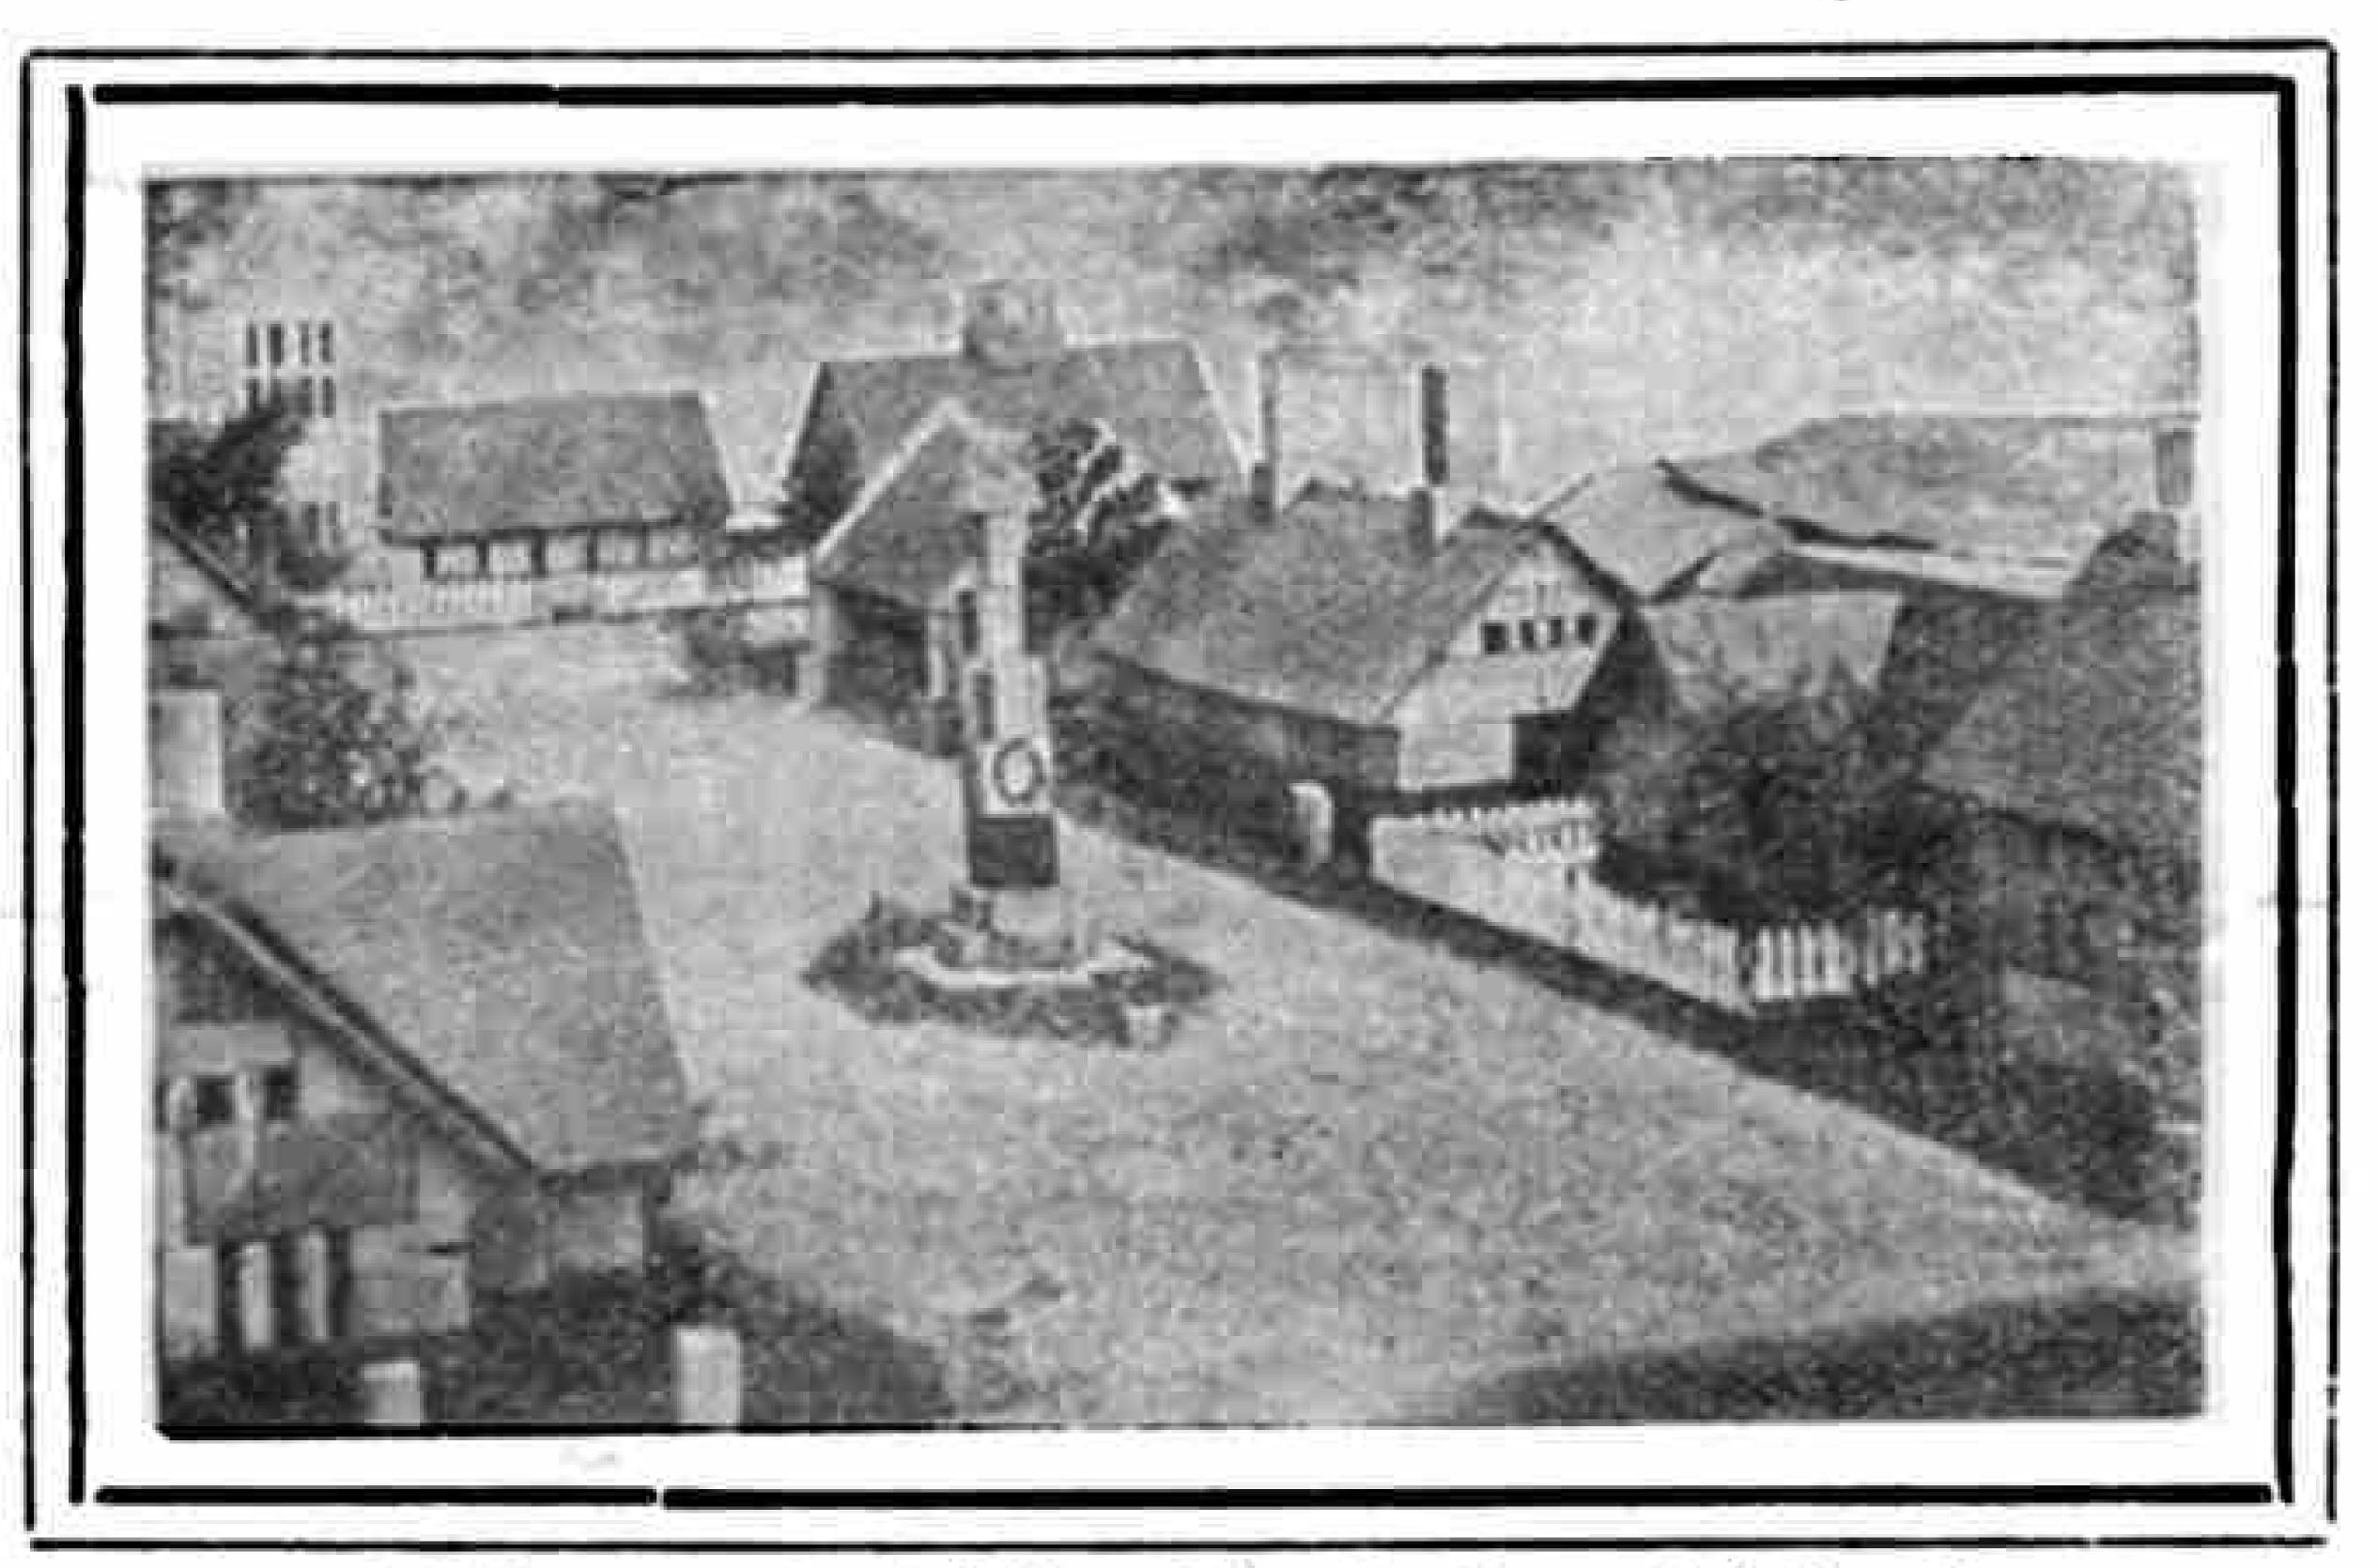



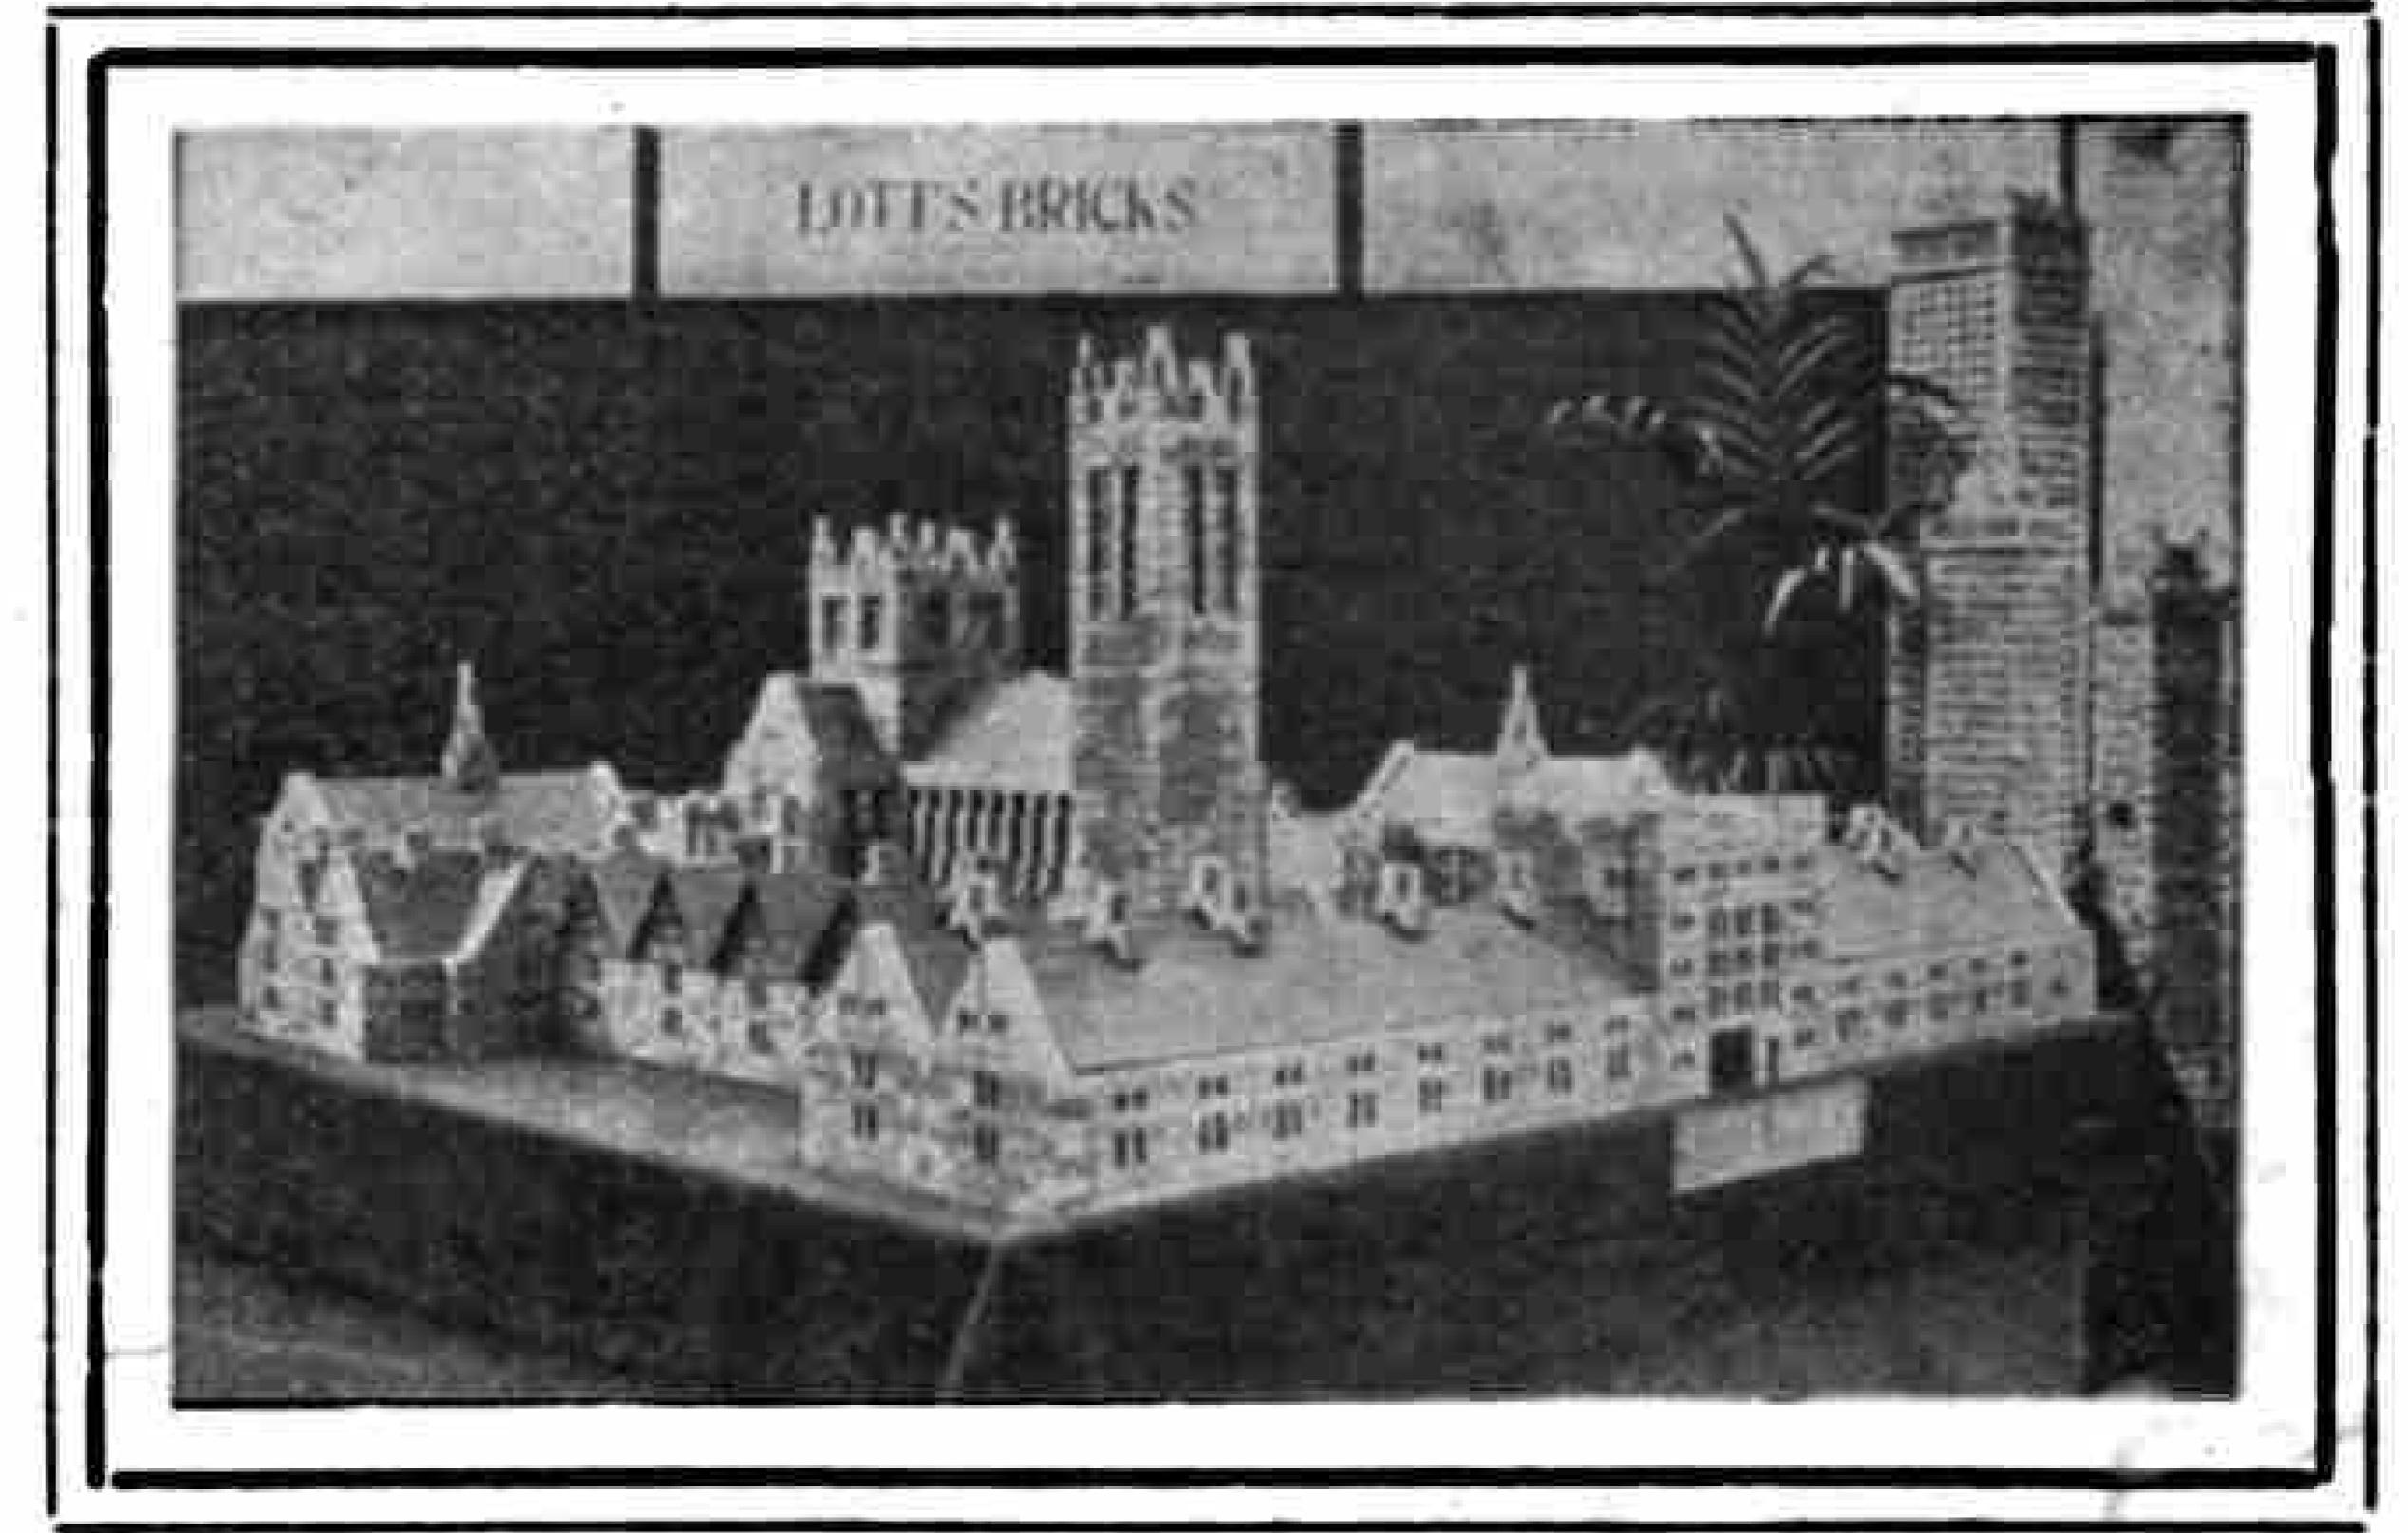

Model of a University College constructed entirely with Lott's Bricks.

PRICES:

COMPOSITE SETS. " B " SERIES With Plans, Bricks, Roofs, Fences, Trees, Etc. MADE

TUDOR BLOCKS.

Build Models of Half Timbered Design.

Box A. 6 Models - - 5/- Box 1. 18 Models - - 10/-., B. 6 .. - -5/6 .. 2. 18 .. - -10/6

Box 1. 6 Designs - - 3/3 Box 2. 12 Designs - - 7/6

Ready Shortly.

MANY OTHER MODELS EQUALLY ATTRACTIVE CAN READILY BE DEVISED.

BRITISH

Not "Composite."

Box 3. 49 Models - - 17/6 Box 6. 71 Models - - 35/-

Each Box is complete in itself and docs not require tools or accessories of any kind. GARDEN SETS.

Containing Trees, White Paling Fences, Shrubs, Extra Roofs, Shells, etc. Box 2. - 6'-Box 1. - 4/-

MODEL DISPLAYS

Army & Navy Co-operative Society. Ltd. KENSINGTON J. Barker & Co. Ltd.

Benetfink & Co. Ltd. CHEAPSIDE

BRIXTON Bon Marche Ltd. HOLBORN - A. W. Gamage Ltd. BROMPTON ROAD Harrods Ltd.

QUEEN VICTORIA ST. Civil Service Supply Asstn. Ltd.

Jones & Higgins Ltd. PECKHAM -OXFORD STREET Selfridge & Co. Ltd. QUEEN'S ROAD - W. Whiteley Ltd.

> And all leading Toy Emporiums throughout the Kingdom.



Typical New York Skyscrapers.

See what other Boys have done and write for

FREE Competition Designs

with List of Prize Winners

Provincial Displays

Treron & Co. Ltd. GLASGOW

- Wylie Hill & Co. Ltd. MANCHESTER Lewis's Ltd. LIVERPOOL - Bon Marche Ltd. Lewis's Ltd.

Owen Owen Ltd.

BIRMINGHAM Lewis's Ltd. NEWCASTLE-

J. Coxon & Co. Ltd. ON-TYNE


The Pygmalion LEEDS -- David Morgan Ltd. CARDIFF SOUTHSEA - Handleys Ltd. BOURNEMOUTH Beales Ltd.

NOTTINGHAM Griffen & Spalding Ltd.

J. Walsh Ltd. SHEFFIELD Draffen & Jarvie Ltd. DUNDEE

LOOK FOR OUR SPECIAL ANNOUNCEMENT NEXT MONTH

LOTT'S BRICKS LTD., WATFORD, England

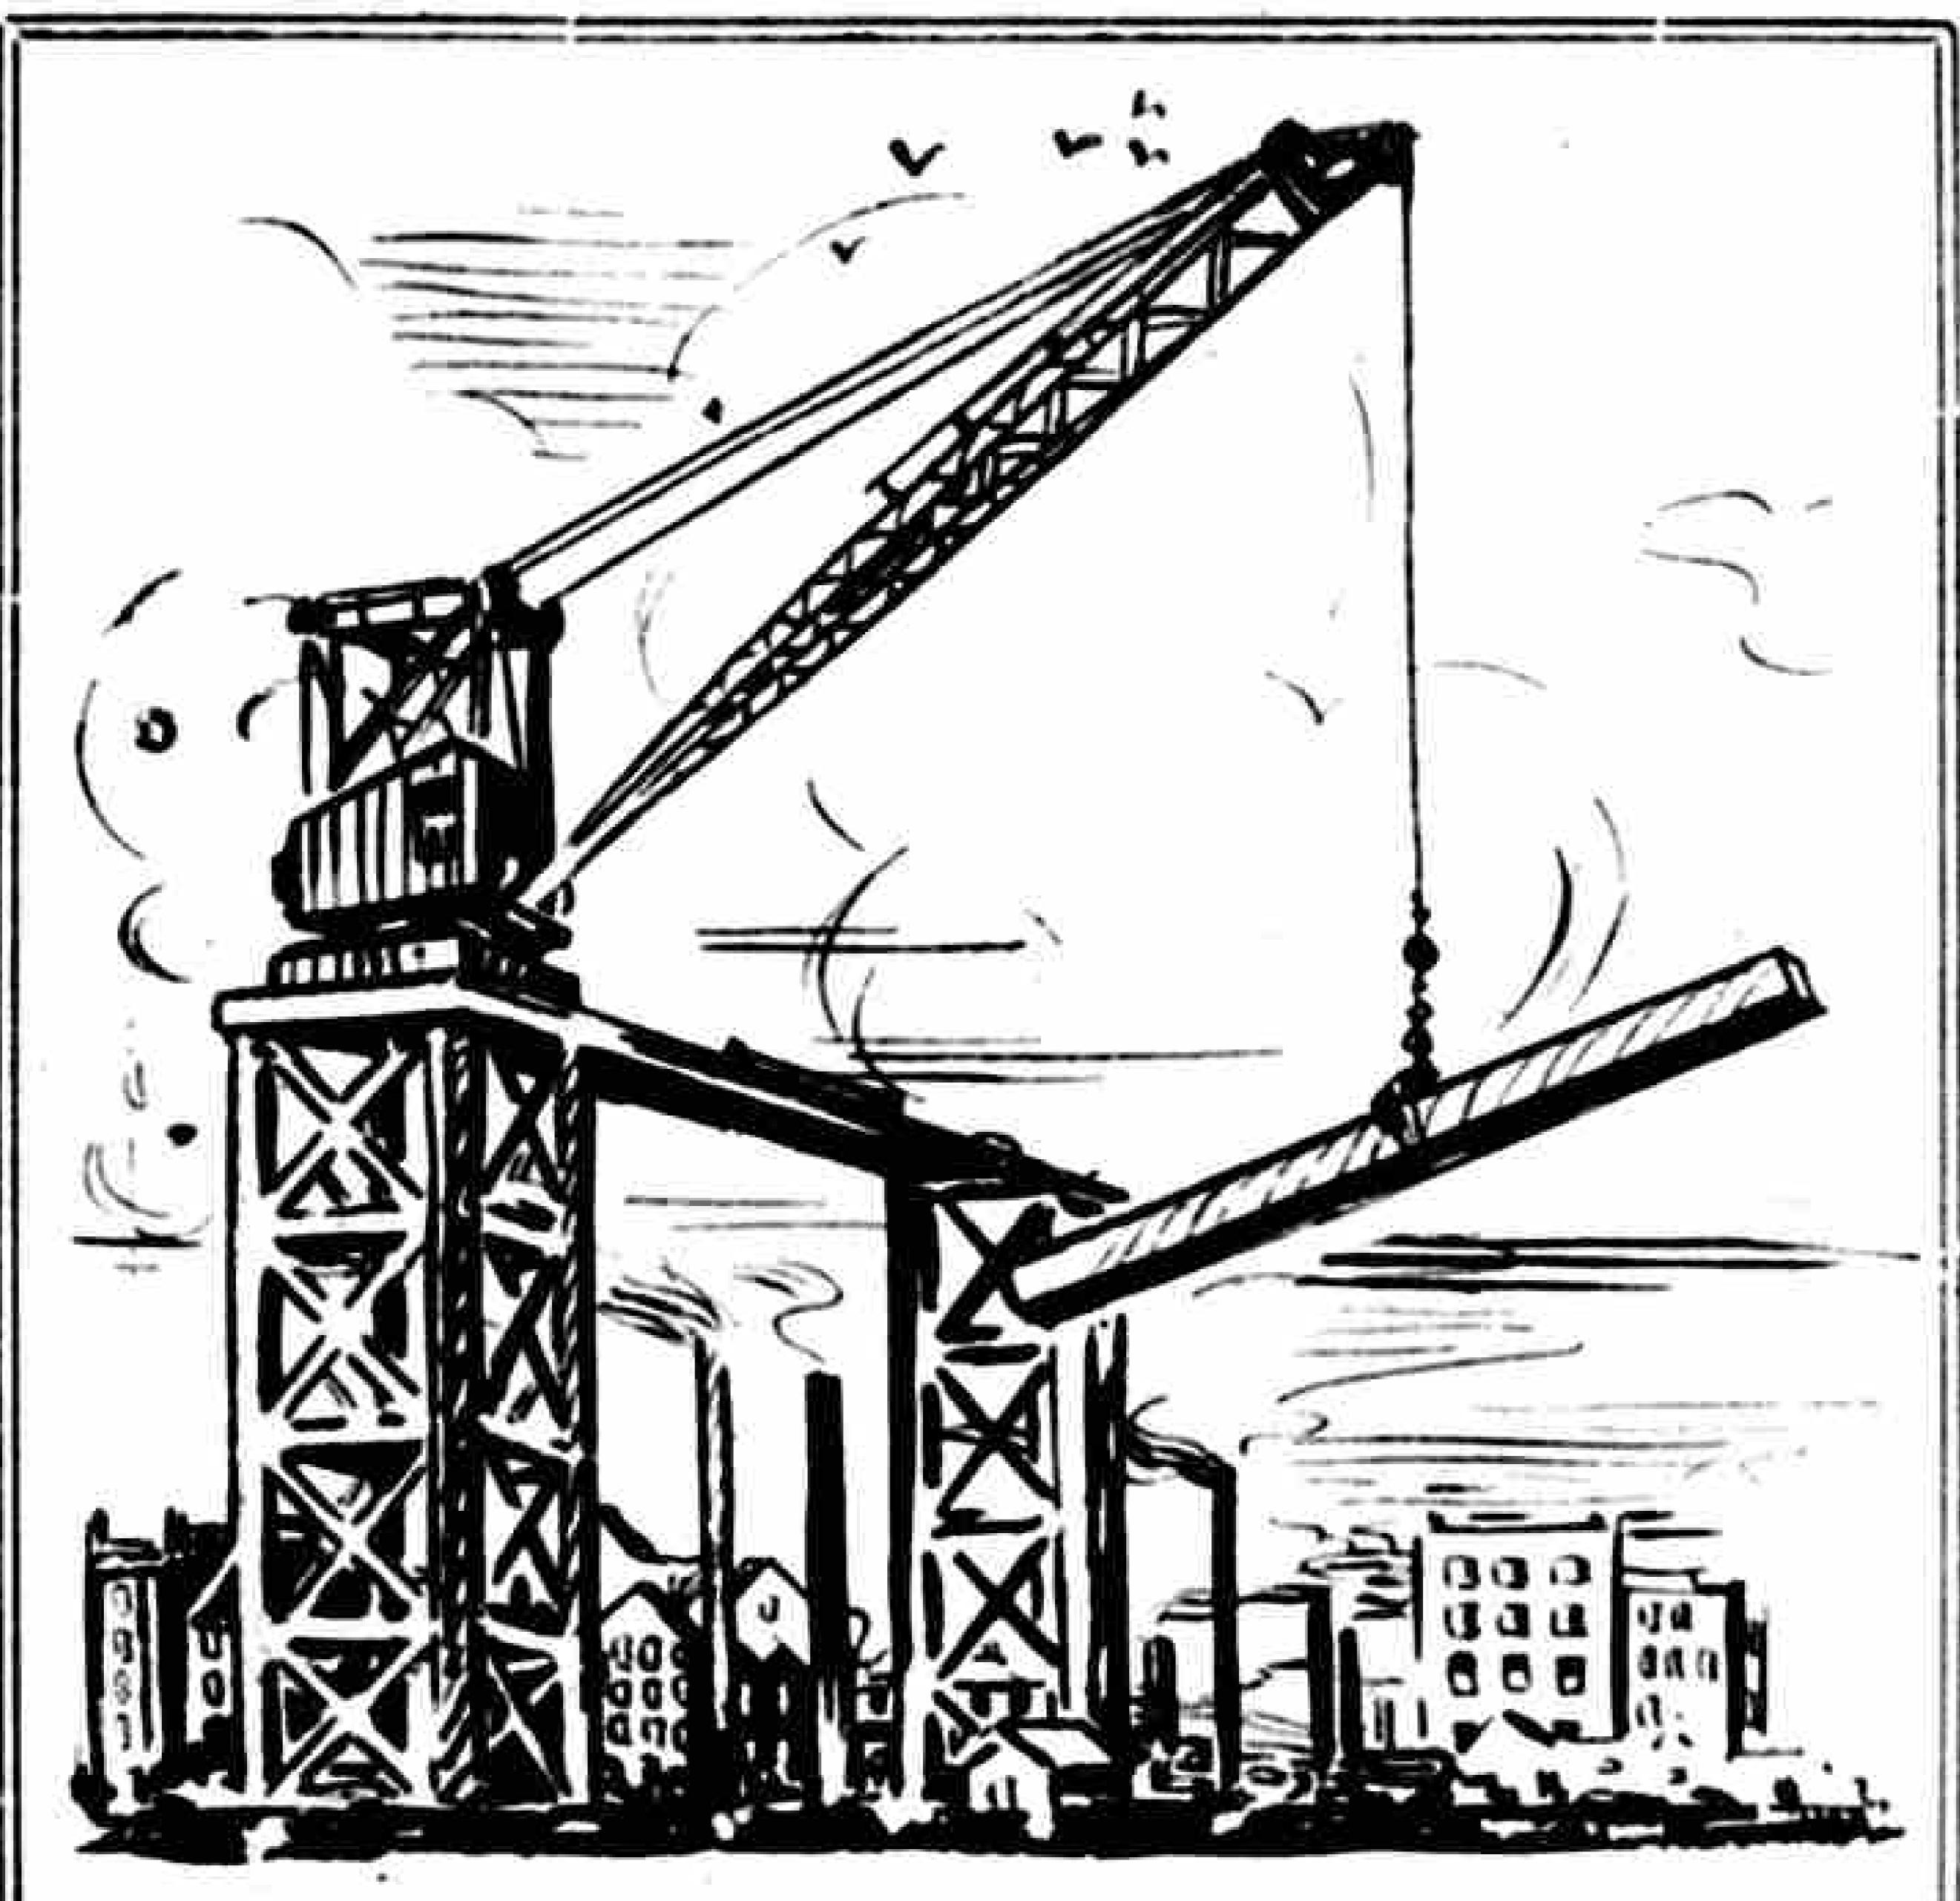

A Chain is as Strong as its Weakest Link

Tons of steel, tons of solid stone and masonry are carried and slung by huge cranes over the heads of the public in every-day building operations.

One weak link in the chain a few broken strands in the ropes—a flaw in the metal-work construction—might lead to disaster. Great builders and engineers realise the vital importance of testing every little part in the construction of their cranes and other building apparatus.

Even your own bodily fitness is dependent upon very important little things. Your teeth, for instance, can have a tremendous effect on your health. Neglected teeth will decay and form poisonous acids that pass into your body, causing serious illness.

You cannot be really fit and well unless you have sound teeth. Sound teeth are clean teeth.

It is a simple and pleasant matter to keep the teeth in perfect condition by the twice daily use of Gibbs Dentifrice. It cleans and brightens the teeth by removing the greasy food deposits and polishing the millions of tiny waves and facets into which the enamel of a normal tooth is divided.

It is these facets of the enamel (seen only through a powerful magnifying glass) which give the bright, sparkling appearance to clean teeth.

Gibbs Dentifrice is most convenient —a solid cake, protected by an aluminium case—it cannot spill or squeeze out.

Your chemist can supply you with Gibbs Dentifrice at the following prices: Large size 1/-, De Luxe 1/6, Refills 11d., Popular size 7½d.


"The Fortress of Ivory Castles"

FREE! Your little brother or sister will be keenly interested in the Gibbs Fairy Book "THE FORTRESS OF IVORY CASTLES"—a sequel to the famous "Ivory

OF IVORY CASTLES "—a sequel to the famous "Ivory Castle Fairy Book"—an enthralling story comprising 36 beautifully illustrated pages. Sent post free, together with a useful size sample of Gibbs Dentifrice, on receipt of 3d. in stamps to cover cost of packing and postage.

D. & W. GIBBS LTD. (Dept. 81 F.U.), Cold Cream Soap Works, London E. I.

Wecovalve talks

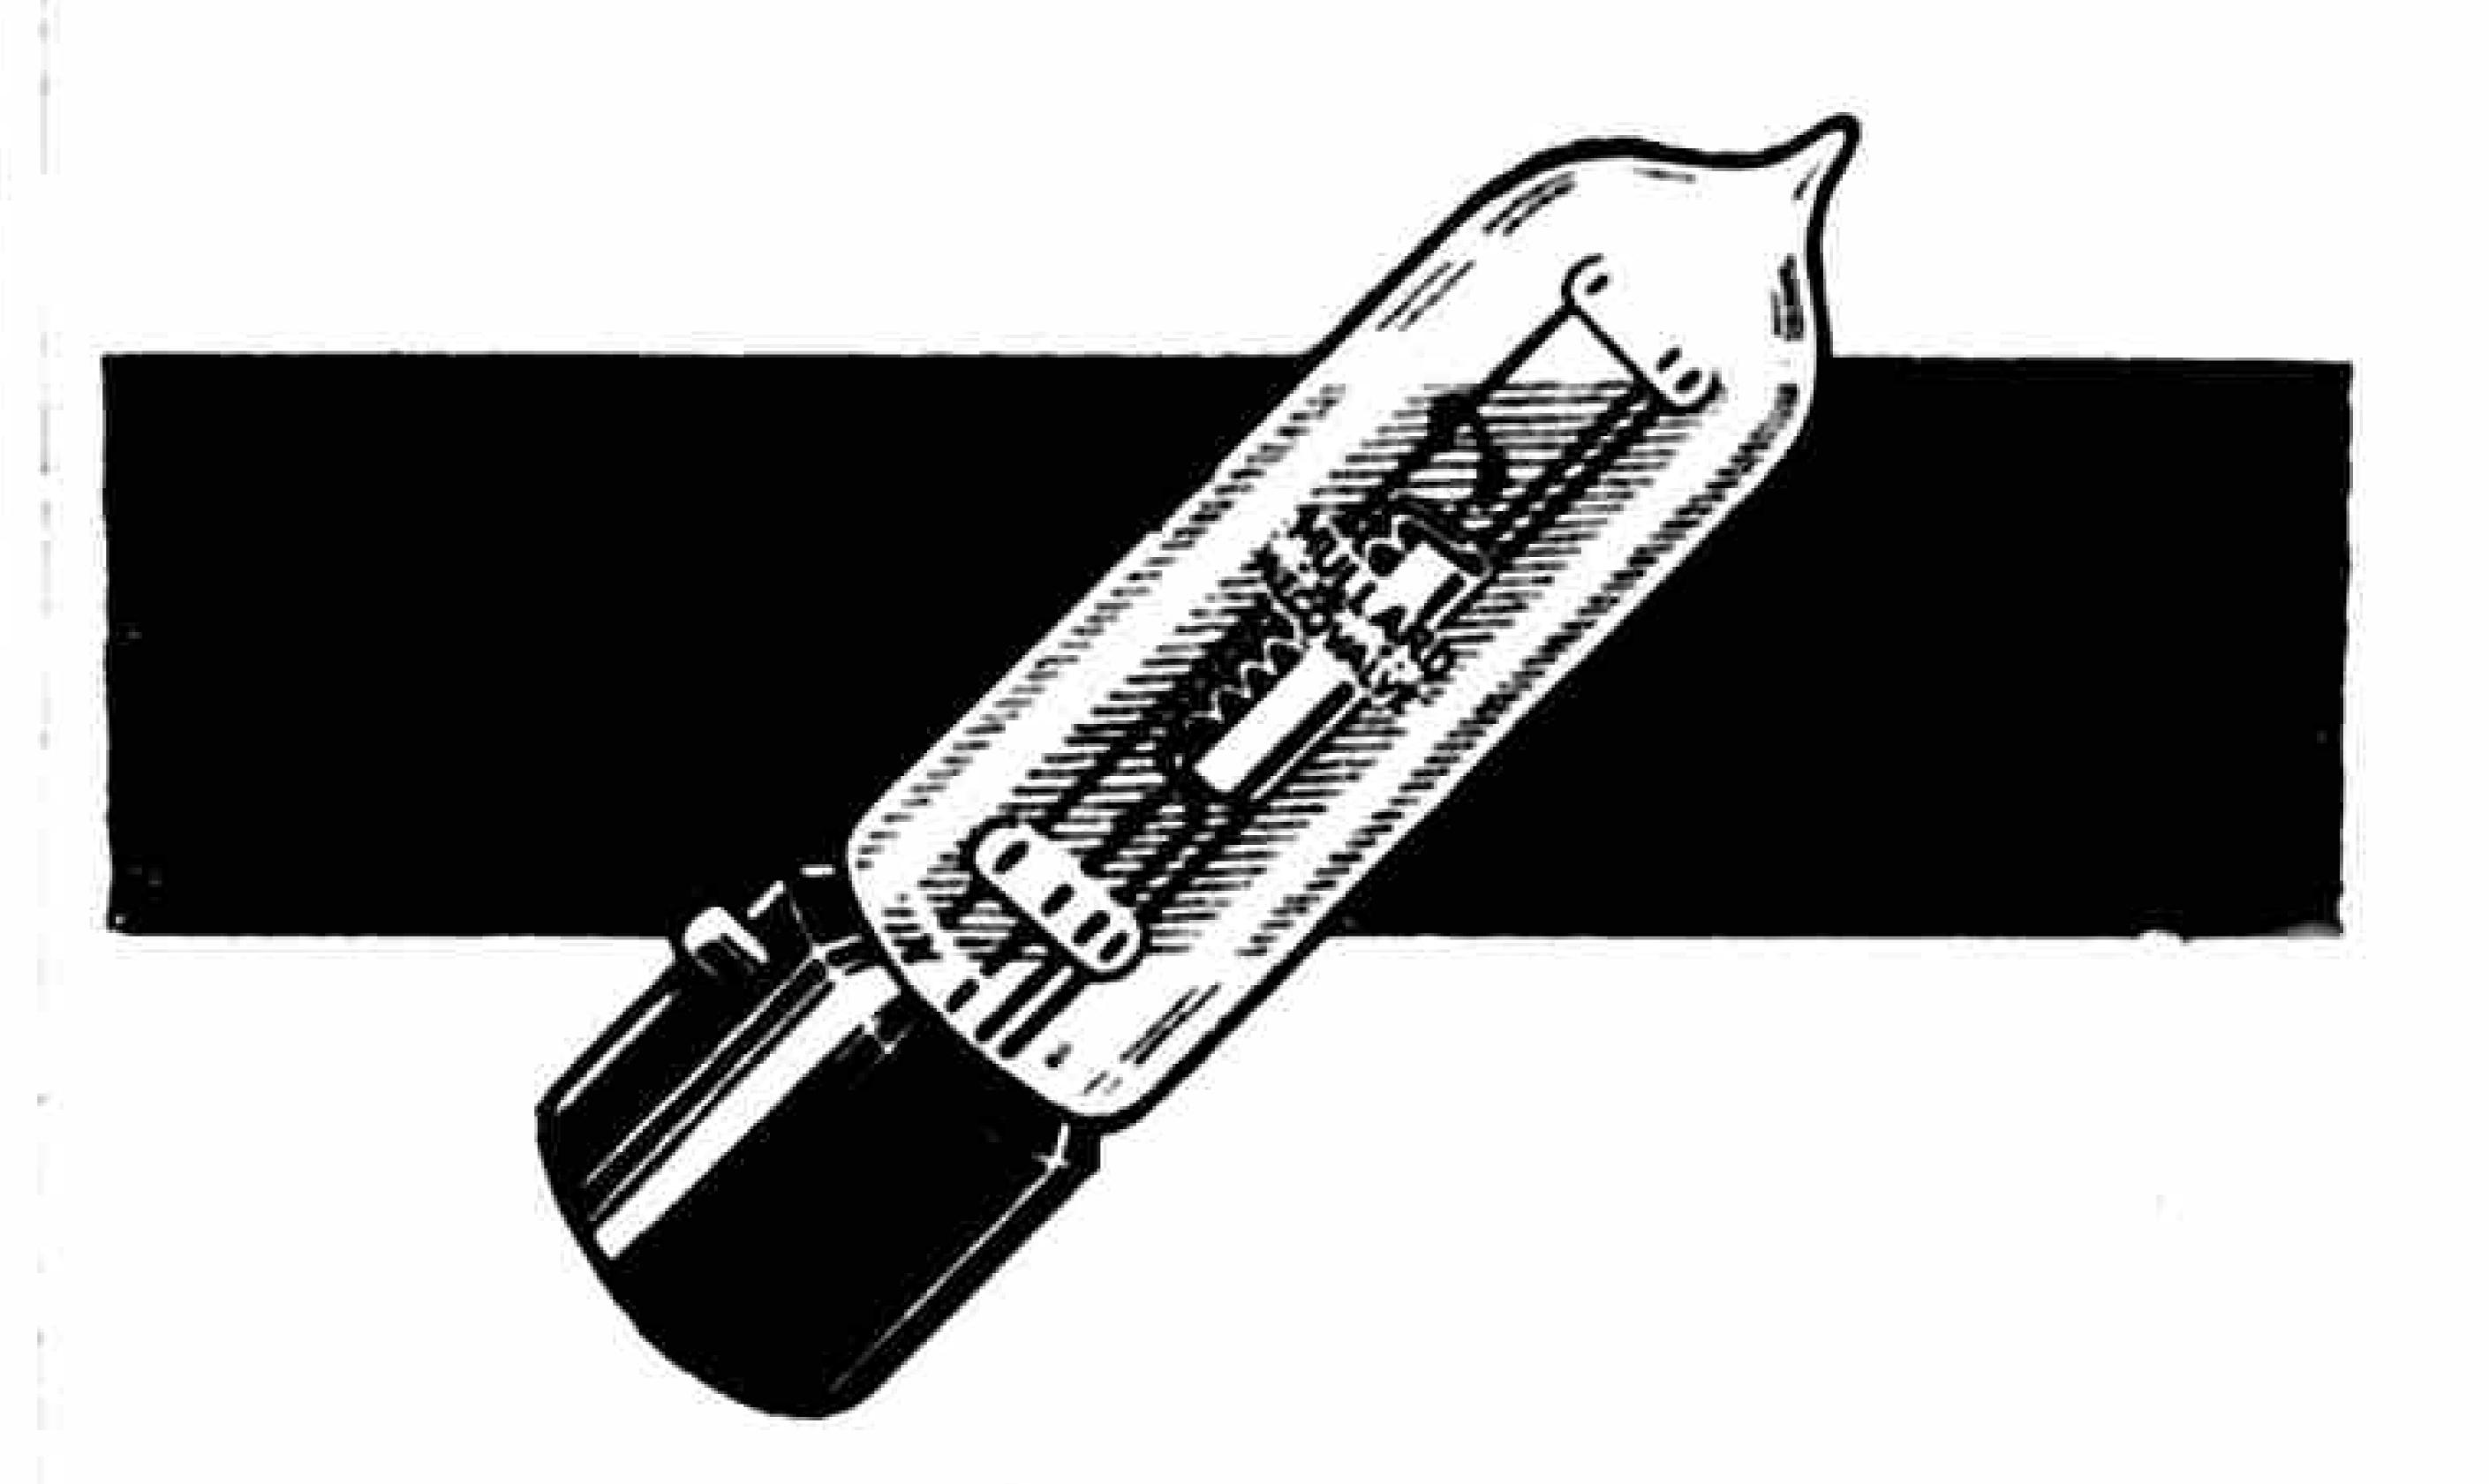

No. 1

The Mullard Wecovalve represents a distinct advance upon valves of the "Dull Emitter" type.

One Wecovalve operates with perfect satisfaction from a single dry cell of 11 volts.

Even with this small voltage, a resistance is necessary since loud signals can be obtained from the Wecovalve without the filament being made to glow at all.

The single cell will last for weeks working 4 to 5 hours per day.

No other valve has these advantages.

Fit your receiver with Mullard Wecovalves to-day.

Mullard

Advt. of The Mullard Radio Valve Co. Ltd., Balham, S.W.12. (E.P.S. 75).


THE BOYS' STOREHOUSE



From 4/- to 32/6

We are sole agents for Liverpool and District for Hobbies famous Fretwork Outfits, Tools, etc. Large Catalogue with 1/6 design, post free 1/-

New Hornby Presentation Set

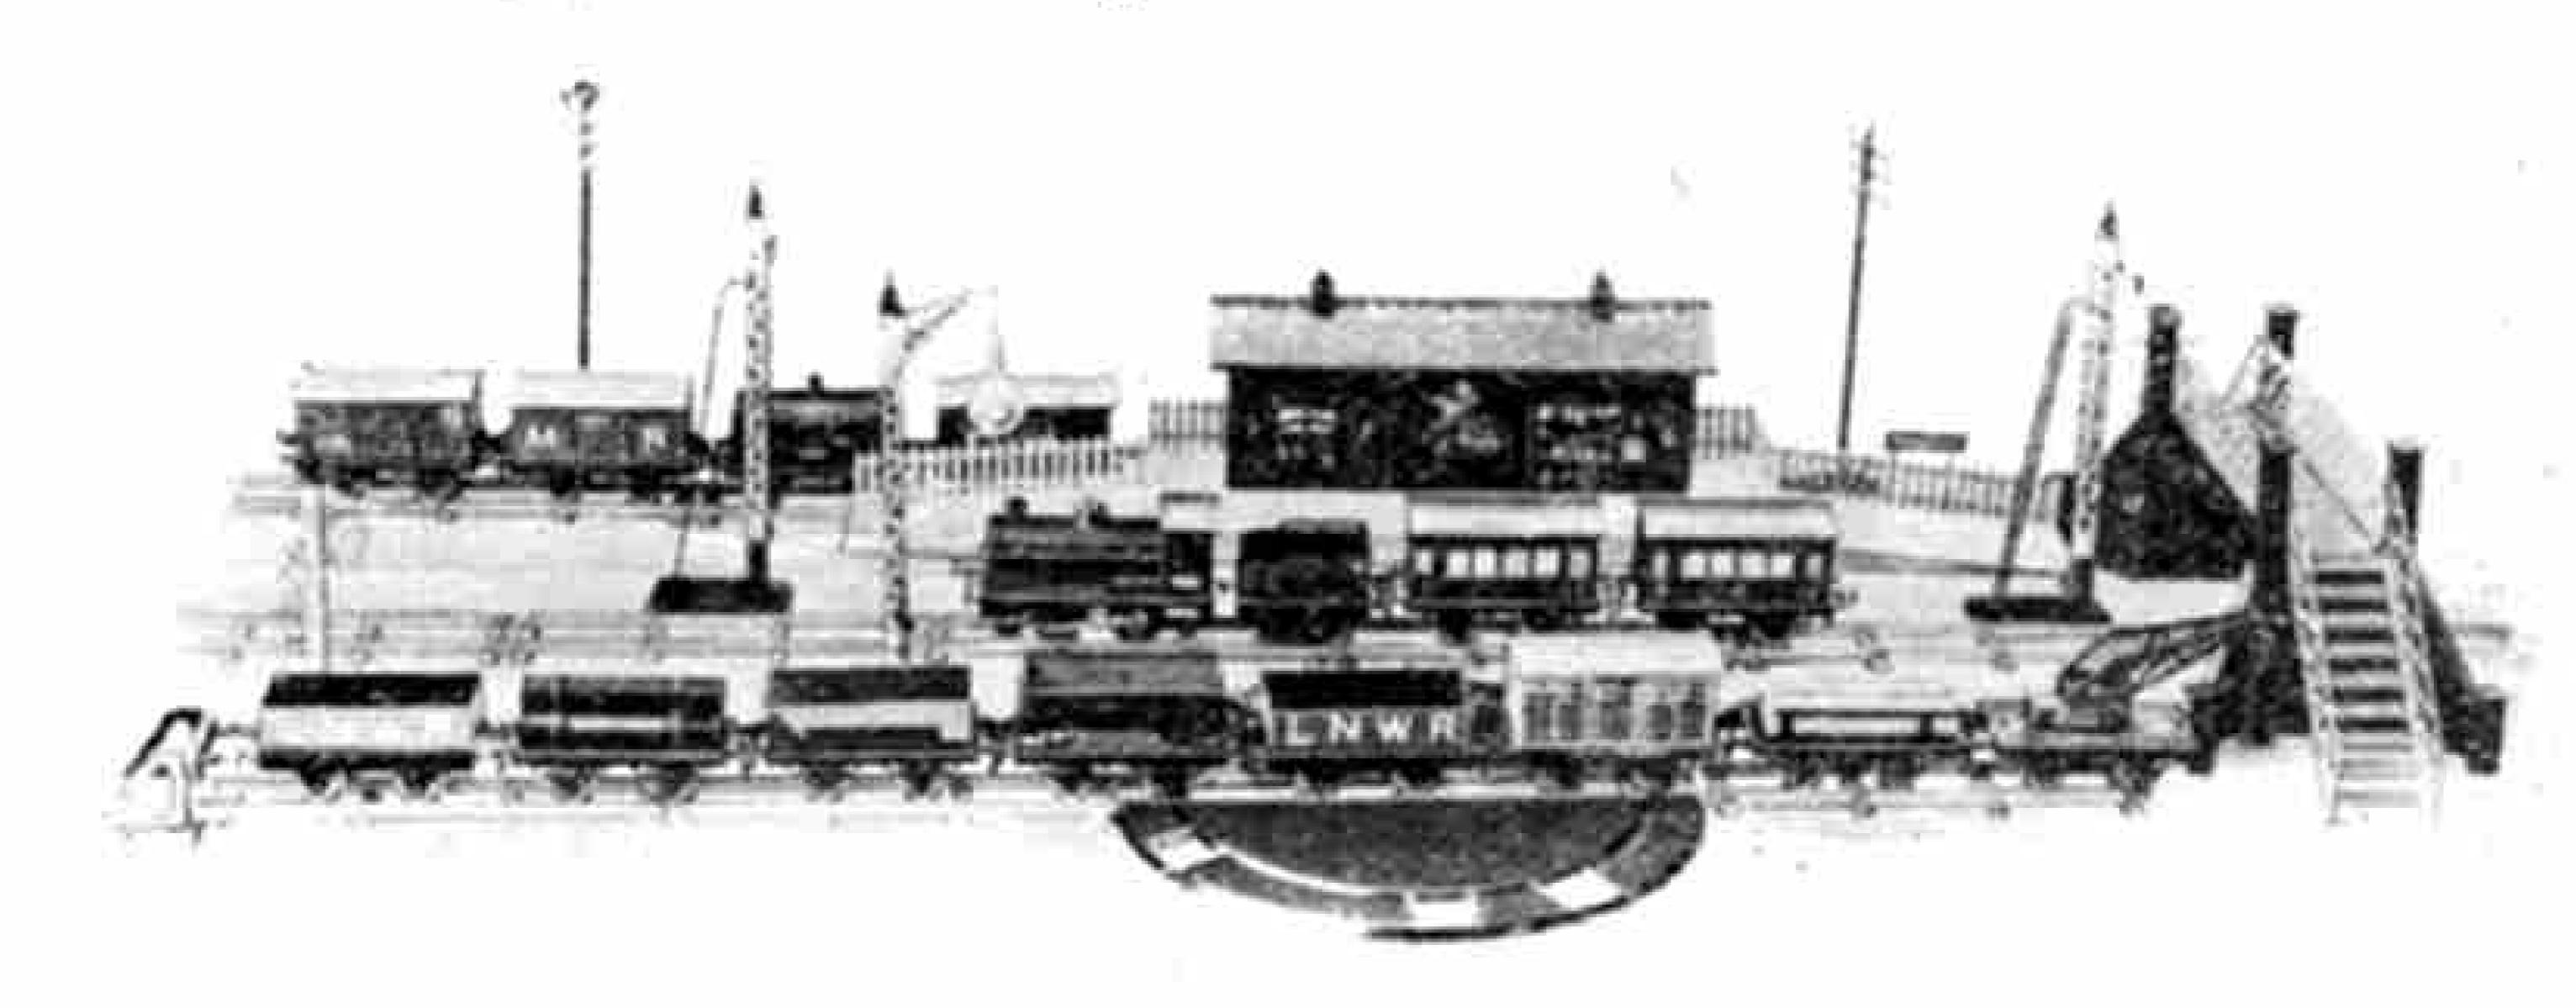

A Complete Railway for £6: 19: 6d., or we can sell you any single piece.

Free Lists by Post

for

Meccano Outfits & Trains; Wireless Parts and Books;

Metals, Sheet, Rod & Tube; Fret Timber, and 3-ply Wood

C. LUCAS (M), 35, Manchester St., LIVERPOOL



No. 11. Empire Theatre of Varieties.

This is a beautiful and entertaining toy, with all the romance and glamour of the stage. The pleasure to be derived from the performance, given by the eight Artistes, is extreme. The show is a tremendous success at a Children's Party, and a supply of Programmes can be given round by the "Ushers." All the Stars are billed on Special Posters.

Price ... 6/- complete, post free.



No. 16. Punch and Judy.

A most clever and realistic performance can be given with this show. Have you ever seen old Punch and Judy, and Toby, and the Ghost, and all the other funny old Figures? Whether you have or not makes no difference, because anyone can make heaps of fun. Try one for entertaining your friends!

Price ... 4/6 complete, post free.

SEND FOR FULL LIST OF 21 ENTERTAINING TOYS

FROM

MATHEWS' MODEL TOY FACTORY Short Street, LEICESTER

Cars on Railways (cont. from page 141)

without rest. Some of the cars cover nearly 150 miles every day.

The engine develops 60 h.p., and ignition is by both high tension magneto and battery. The petrol consumption is approximately 5—7 miles to the gallon. The engine also drives a small generator for the lighting. In winter the car is heated by passing the exhaust gases through pipes laid along the sides of the car near the floor. The brakes are applied by compressed air from a small compressor, similar to those used in some motor garages for pumping up car tyres.

These rail-cars are used on branch lines where there is little traffic, because in these circumstances they are more economical than steam locomotives and coaches. It is expected that in the near future larger rail cars will be built. These will have double-swivel trucks, more powerful engines and double-end control.

The Men Who Gave Us Radio—(cont. from page 151)
passed a wire, projecting into the space occupied by
the filings, but not touching each other. To ordinary
electric currents, these filings were a bad conductor,
but when subjected to high frequency currents, such
as the spark from an induction coil, they instantly
became a good conductor. By connecting them in
the circuit of a battery and a Morse recorder it was
thus possible to make them record signals from a distance.

Branley
Working on this principle Professor Branley, of Paris, invented (in 1890) his "coherer" which, as we shall shortly learn, was the detector subsequently improved and adopted by Marconi.

NEXT MONTH.

The concluding instalment of the series will deal with :--

LODGE, POPOFF, RIGHI, & MARCONI

Small Advertisements

Small advertisements are inserted in these columns at 1/- per line (average seven words to the line), or 10/- per inch (average 12 lines to the inch). Cash with order. Letters to Advertisement Manager, "Meccano Magazine," Binns Road, Liverpool.

FOUNTAIN PENS complete with filler and box marked 10/6. Our price 1/9 post free. A useful present. Box No. 21, c/o-" Meccano Magazine," Liverpool.

ADVICE, HANDBOOK & CONSULTATION FREE. King, Registered Patent Agent, 146a, Queen Victoria Street, London, E.C.4. 37 years' references.

SMALL COMPOUND MICROSCOPE, with 3 Powers, 35/-. A. K., 101, Caythorpe St., Moss Side, Manchester.

Kensington Model Dockyard



SAILING YACHTS AND FITTINGS

MOTOR & STEAM BOATS, MODEL RAILWAYS, ELECTRICAL APPLIANCES, MECCANO OUTFITS & PARTS ALWAYS IN STOCK.


C. H. LORBERG, C. H. & E. F. LORBERG Trustees
185, Konsington High St., London, W.S.

Price List " M " Post Free 3d.

WANTED

WANTED, "MECCANO MAGAZINES." Nos. 1 to 7, and No. 10 intact. 1/- each offered. J. A. A., Box 23, "Meccano Magazine."

MAKE YOUR OWN ELECTRIC LIGHT

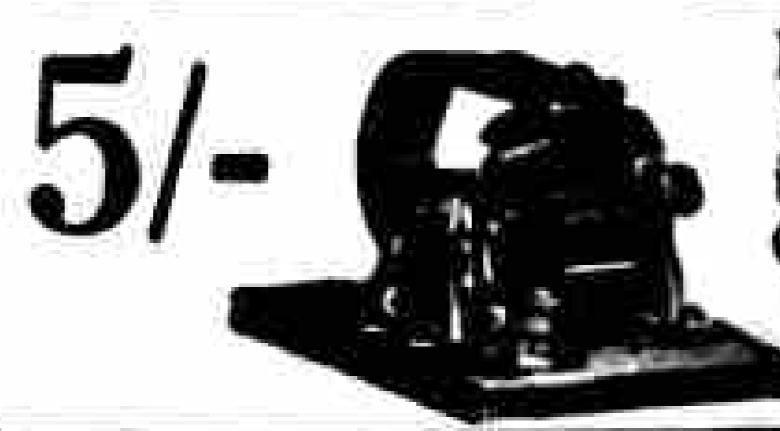

Every "Meccano Boy" who is interested in Electricity or who one day wants to be an Electrical Engineer should get one of these wonderful Dynamos and learn how Electricity is made. They are easy to work. Will light brilliantly 4-6 v. lamps and are backed by Green's many years experience. Send now! Delivery by return Dynamo 5/-, Post 64.

GREENS, Dept. N., 85, New Oxford Street, London.

BRITISH EMPIRE. ALL MINT.
CYPRUS, Script, 10 paras grey and yellow ... Id.
CHINA on HONG KONG, Script, 1 c. brown, 1d.;
2 c. green, 14d.; 4 c. red, 3d.
IRISH FREE STATE 4d. (Arms), indigo ... 5d.
MOROCCO AGENCIES, K.G., 40 c. on 4d. slategrey ... 4d.

POSTAGE EXTRA.

ALEC KRISTICH (Member N.R.P., 279),
82, Marchmont Street, Russell Square, London, W.C.I.

FREE! THE SMALLEST STAMP in the WORLD.

The "M.M." packet of stamps containing this remarkable stamp and also Mauritius, Russia, NIGERIA, Jamaica, SCHLESVIG, Victoria, TANGIER, Brazil, DECCAN, Cape, POLISH SILESIA, Czecho, BULGARIA, Venezuela, TRAVANCORE and 14 PICTORIAL UKRAINE (30 splendid stamps in all) will be sent FREE to all who send 14d. postage and ask to see my special approval sheets. I supply EVERYTHING for Stamp Collectors at very lowest possible prices.

250 DIFFERENT STAMPS. Catalogued over [1. 1/- post free. Kraus & Co., Cheapside, London.

VICTOR BANCROFT, Philatelic Dealer, MATLOCK.

STAMP COLLECTORS! Be sure you get "The Philatelic Magazine," the fortnightly stamp newspaper, 3d., from any newsagent, or 4d. post free from Publisher, 63, Windsor House, Westminster, S.W.1.

100 Diff. Stamps Free, incl. Colonials, S. American, China, etc. (No Neurope) to applicants for appros. See my famous 4d. stamps. Fleming, Queens Park, Chester.

FOR POSTAL ORDER 1/-

and request to see my famous approval sheets I will send packet of 200 foreign and colonial stamps catalogued to 4/-.

THOS. SCOTT, 154, Wellesley Road, ILFORD, Essex.

50 BAVARIA FREE!

All different and well worth 2/-. Just ask for my popular Approval Packet (not sheets) of 200 Selected Stamps on approval at 4d. each, and you will receive the gift sent by return post and the Wonderful Approval Packet.

SUPREME VALUE IN XMAS BARGAIN PARCELS. Complete Outfits 5/-, 10/- and 20/- contain the best of everything it is possible to include for the money.

C. McCRAIGHT, 13, Pole St., NOTTINGHAM.

SELF-FILLING FOUNTAIN PENS, safety cap, gold nib, 1/9. Powerful Electric Torches, 1/9. Nickel-plated Watches, 6/6. Cameras, wonderful value, 4/6 and 7/6. Post Free. Meccano Parts given free. F. Fox, 2, Station Road, Whitley Notley, Witham.

CINEMA FILMS. 100 ft., 1/-. Post Paid. Phillips, 63, Ewart Street, Brighton.




Skids Football

JUST LIKE THE REAL THING.
A Chum and a Table
are all you require.

Order your Team to-day and start a League among your Chums. Team Set (11 a side) 2/6, League Set (11 a side) 10/6. Also SKIDS CRICKET (11 a side) 3/6. Post Paid. Postage abroad 1/- extra.

Ask your Dealer for them, or write lirect to SKIDS GAMES (M Dept.), 61, Cathedral St., GLASGOW.

DON'T BE BULLIED

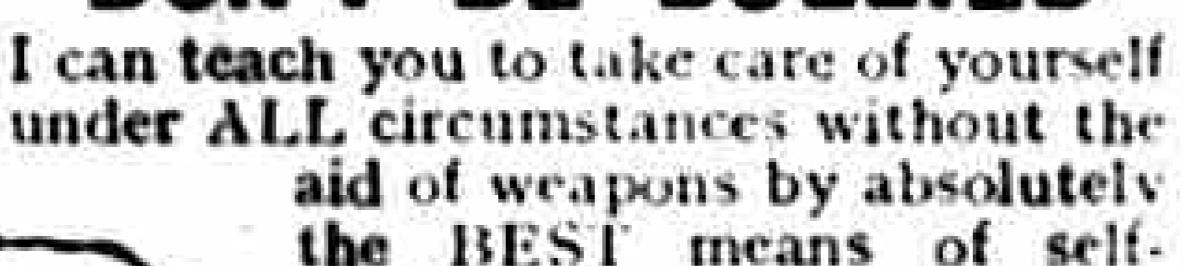

the BEST means of selfdefence ever invented, namely. JUHTSU, the won-

derful Japanese art. Easy and simple to learn. Far more effective than Boxing or any other science. Send Four Penny Stamps NOW for TWO SPLENDID ILLUSTRATED SAMPLE LESSONS and full particulars, or P.O. 2/6 for a Large Portion of my Course. You will be more than delighted. Prof. Garrud, Dept. V., 10 Queensway, Hanworth, Feltham, Middlesex.

TO CLUB SECRETARIES

Owing to the increasing number of orders from club members, we are now offering special terms to Meccano Clubs for all Wireless Accessories.

Secretaries, see that your Club members do not get overcharged by local dealers. Please enclose 1d. stamp and state name of Club.

G. Hare, c/o The H.S. Radio Co., 36, Willes Road, Leamington.

SAVE YOUR PRINTING EXPENSES

Many jobs you now send to the printer can be produced on THE SALCOGRAPH DUPLICATOR. Simple, Cheap and Clean. Outfit, 9" < 14", 10% complete. Postage 1/-. SMITH, 31. Fellows St., London, E.2.

BOYS! BUY THE VERY BEST

These delicious assorted chocolates are packed in beautifully coloured boxes and are guaranteed pure.

blb. box for 1/3 post free.

1 lb. box for 2/3 post free.

3 lbs. in special art boxes, 5/- post free.

Ask your mother and sister to try this special bargain offer. Postal Orders to: -

CONFECTO CHOCOLATÉ CO., 14, Elliot Street, Liverpool.

Useful Tools



Our illustration shows a type o screwdriver useful for reaching bolts in inaccessible places on models. We are disposing of these screwdrivers, whilst our stock lasts, at the special price of 10d. each, post free.

MECCANO LTD., Binns Road, Liverpool.



FOUNDATION

for any model can be made with Plasticine—in 16 Colours. By mixing, various kinds of Marble can be imitated. Plasticine has scores of uses besides modelling. Let us tell you of some. Specimen Box of 5 Colours, The Rainbow, Post Free, 1/2.

ALSO PLAY-WAX AND NOVLART.

HARBUTTS' PLASTICINE LTD., 99, Bathampton, Bath.

CUT THIS OUT

"Meccano" Pen Coupon. Value 3d.

Send 5 of these coupons with only 2/9 direct to the Ficet Pon Co., 119, Ficet Street, E.C. 4.
You will receive by return a splendid British

14-ct. Gold Nibbed Fleet Fountain Pen value 10/6 (Fine, Medium, or Broad Nib). If only I coupon is sent, the price is 3/9. 3:1. less for each extra coupon up to 4 (Pocket Clip 4:1.). Satisfaction guaranteed. Your own name gilt letters, either pen 1/- extra.

Lover Self-Filling Model with Safety Cap, 2/- extra




RIANGTOIS The Worlds Best Toys: REGD.

For CHRISTMAS


Here are a few examples of the beautifully finished British toys made by Lines Bros. They represent the highest value, make excellent Christmas presents, and can be relied upon to give splendid service throughout the year, for they are made to withstand rough treatment.

ASK FOR THEM AT YOUR TOYSHOP.

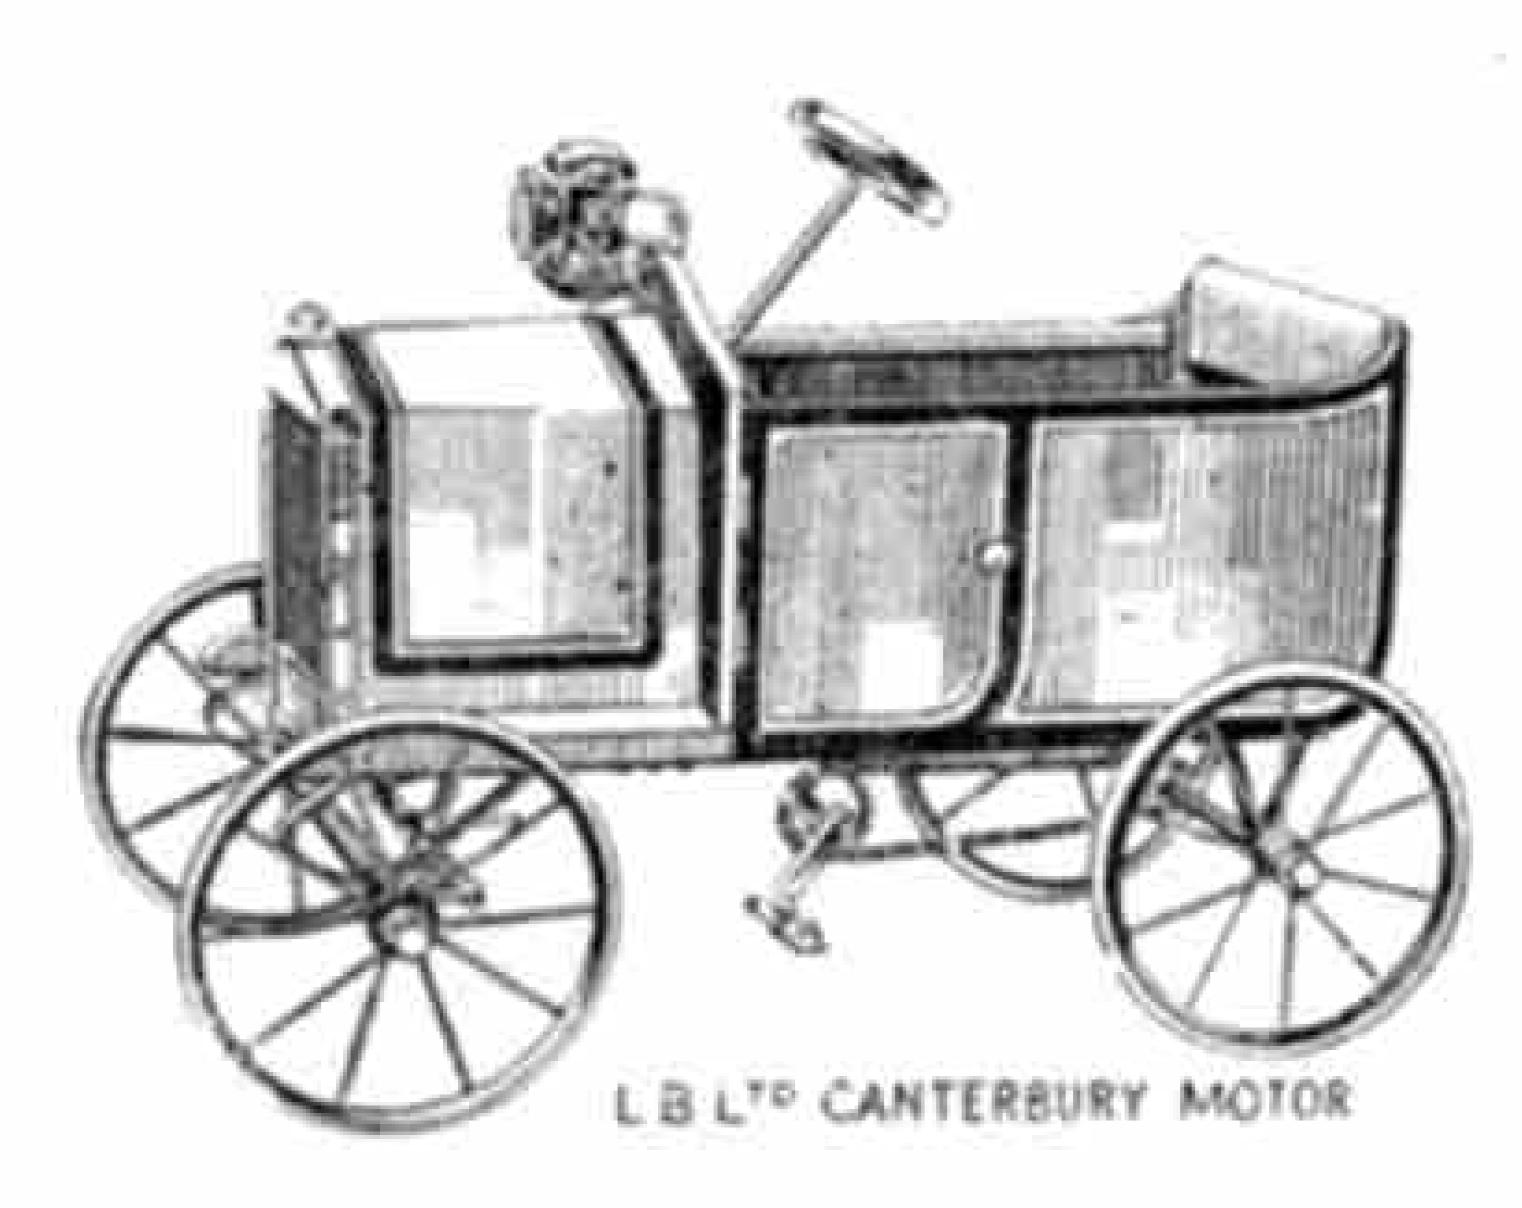

CANTERBURY MOTOR

For children 3.8 years, with pedalling gear, upholstered seat. side door to open, Rolls Royce pattern radiator and lamp 65/3

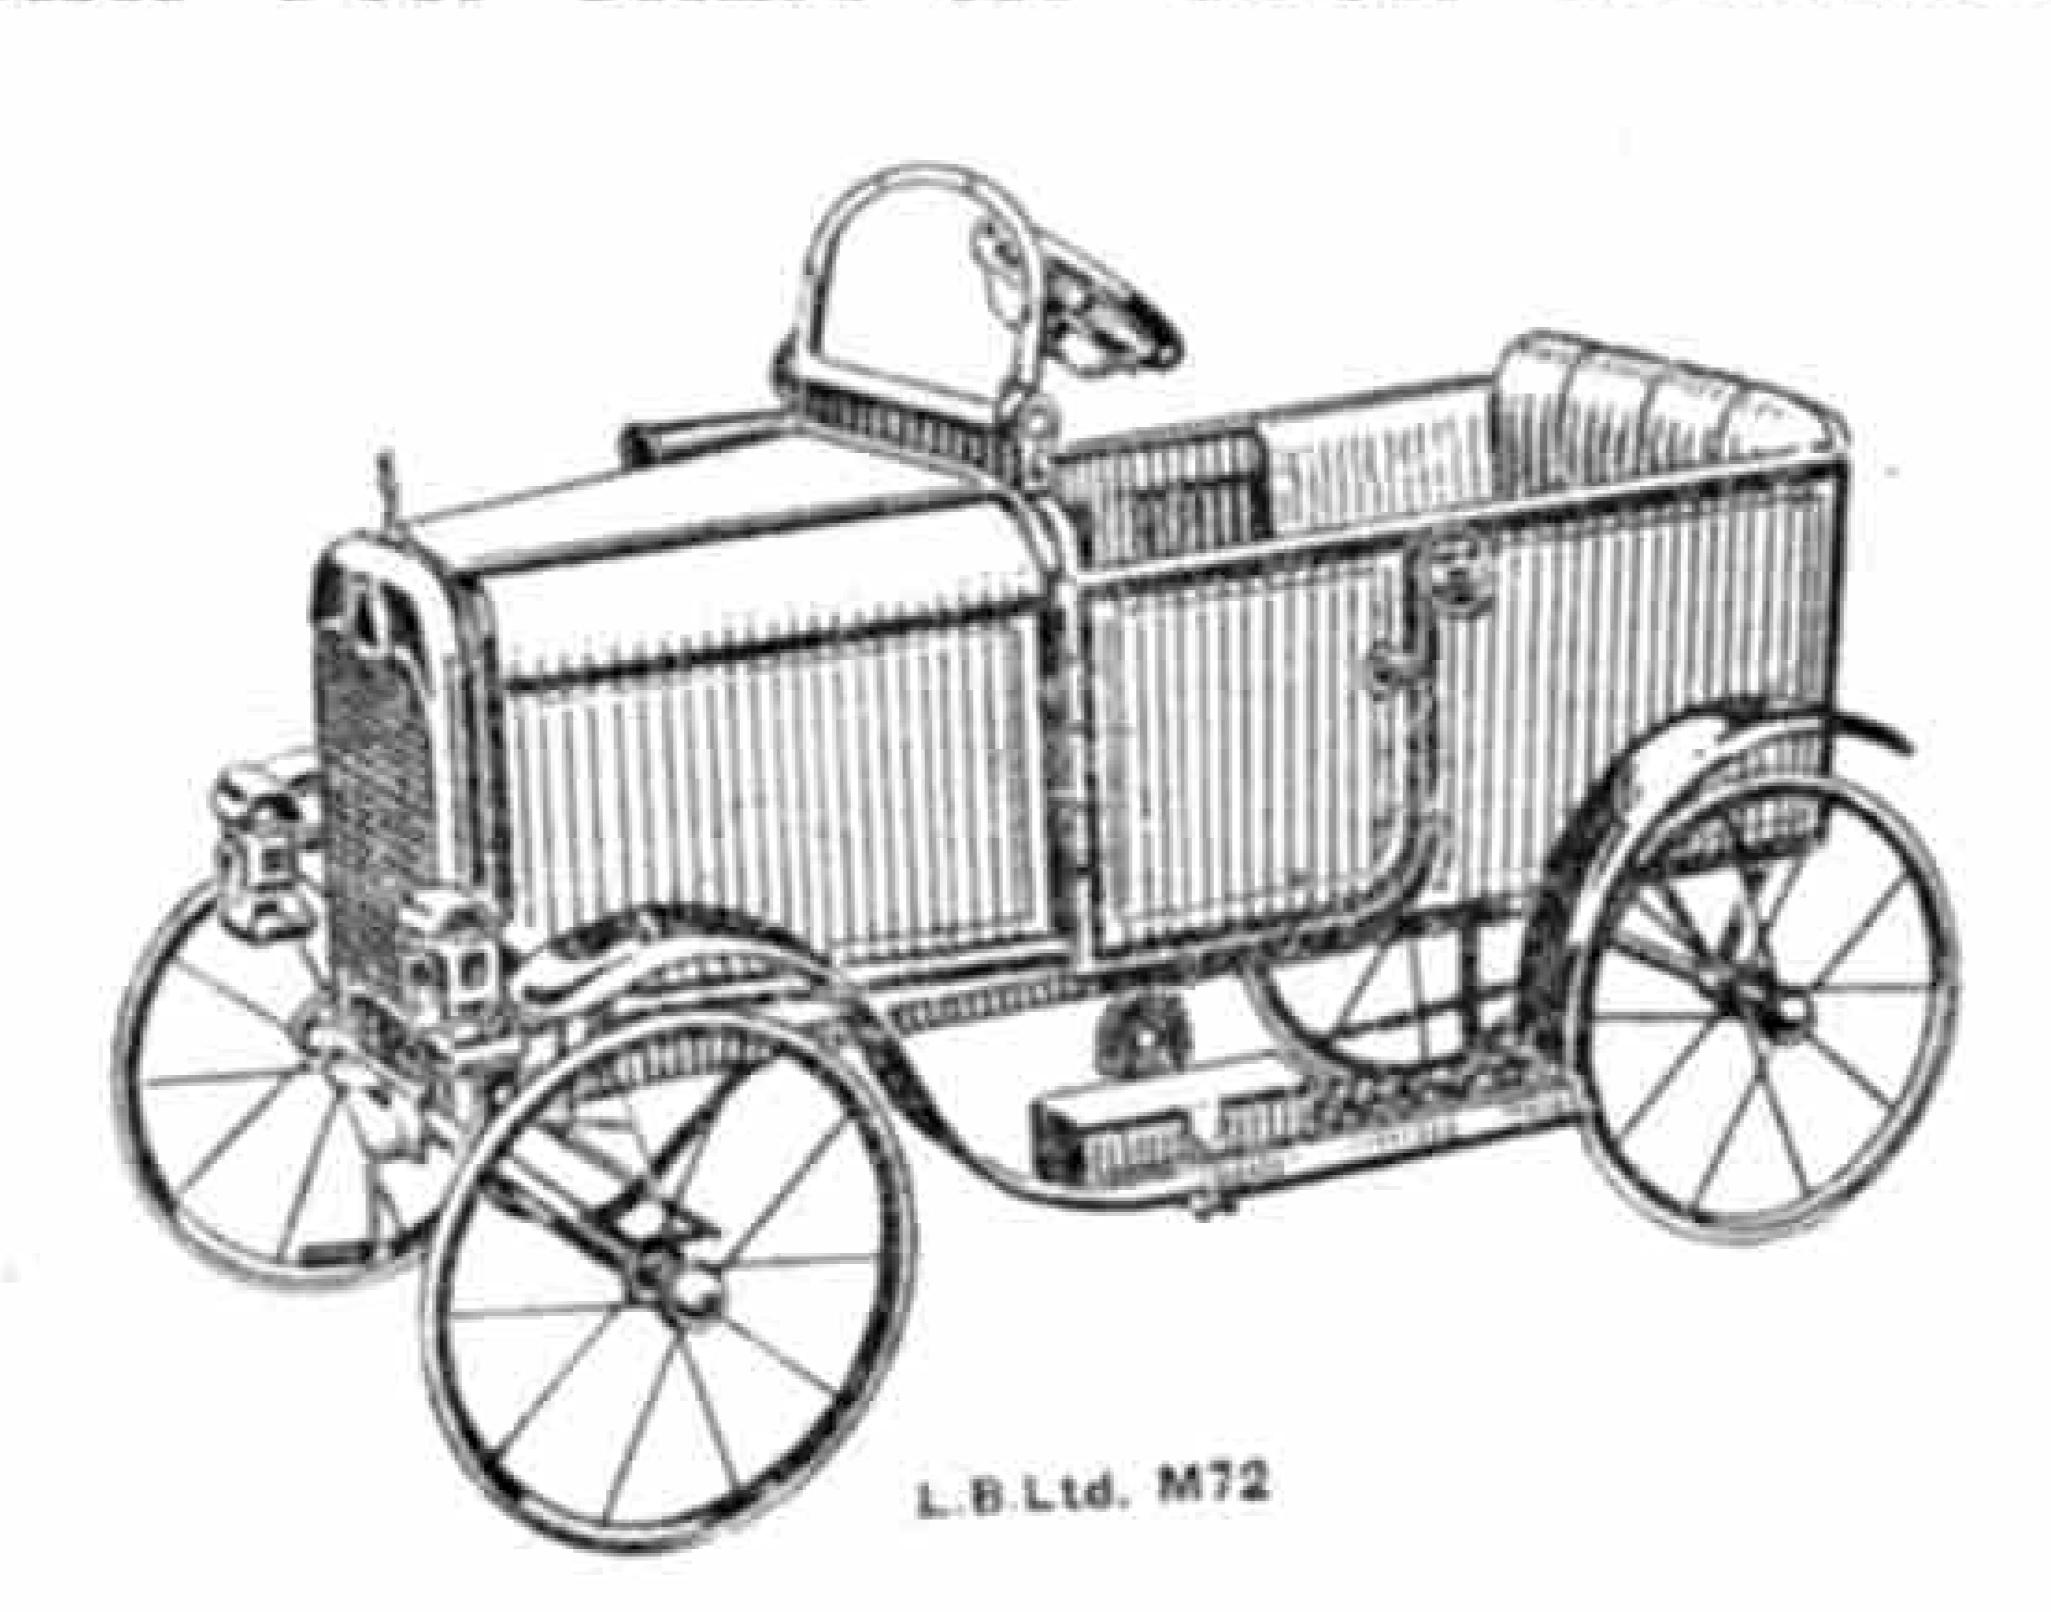


HUSTLER MOTOR

For children 3-9 years, complete with pedalling gear, lamps, mascot, tool box, licence card carrier horn, windscreen and opening door 115/6



For boys and girls. Strongly made on cycle principles of solid drawn steel tubing. Aluminum footboard, 12 in. wheels with & in wired-on tyres. Plated handlebar. Outlasts several ordinary scooters ... 27 /-

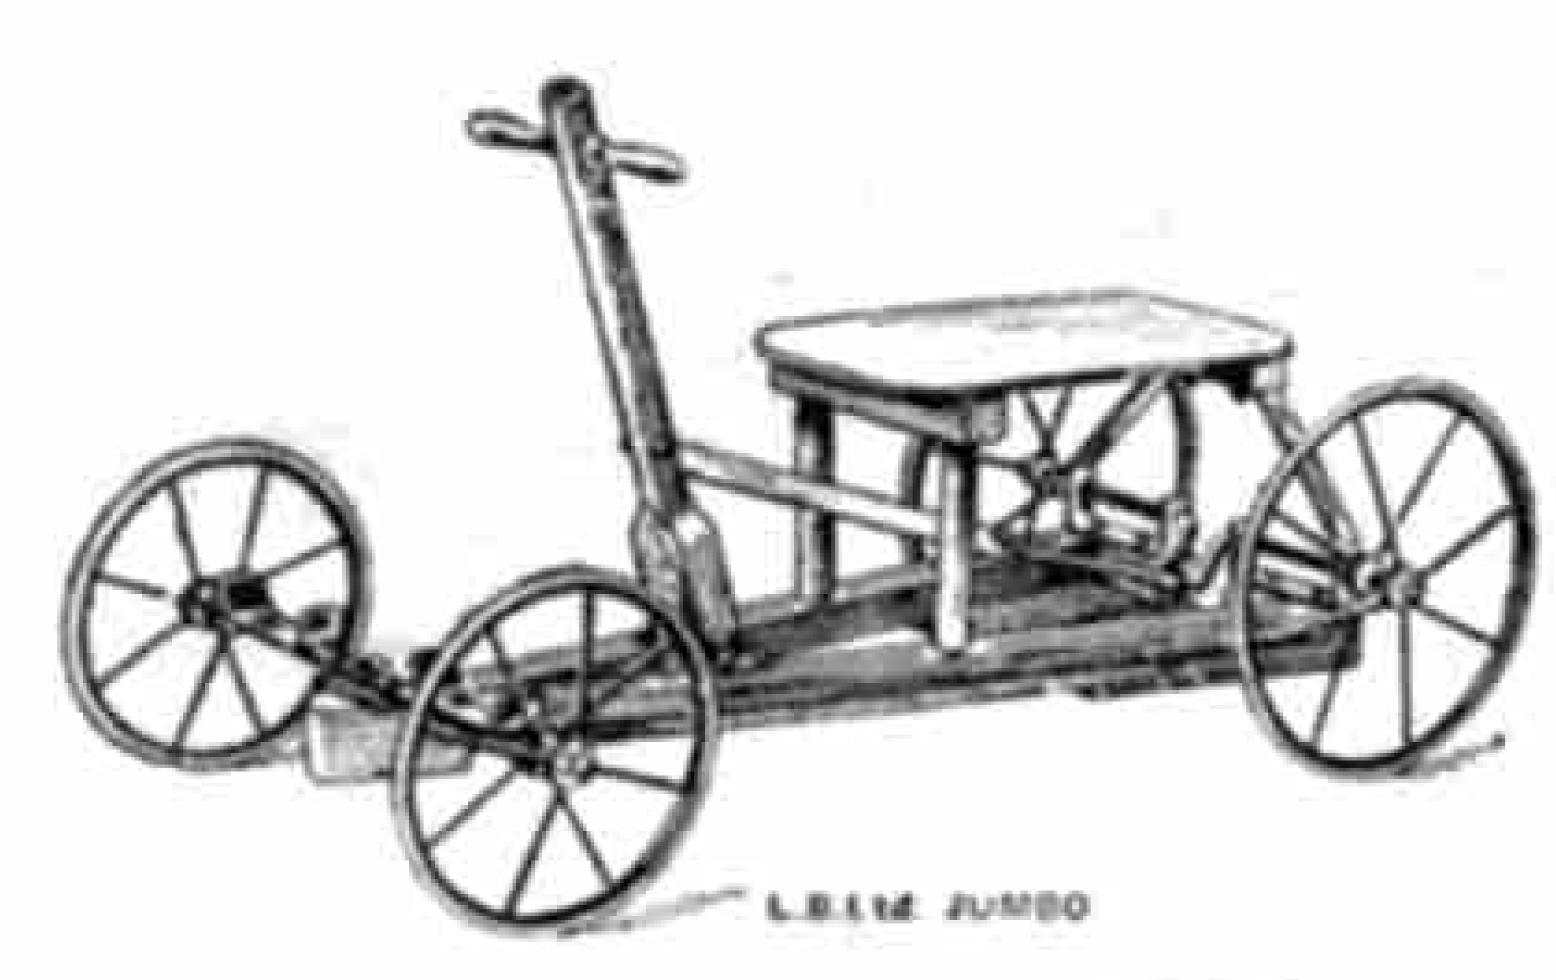


THE JUMBO RACER

Comfortable, safe and strongly made. Handle-propelled. 35 in long. For boys and girls ... 23/3



THE FAIRYCYCLE

(Regd. Trade Mark). Built like a bike-but safer. Adjustable saddle and bars, mudguards, free wheel, brake, ball bearing rubber pedals, 12 in. wheels with # in. wired-on tyres. Look for the triangle trade mark on the frame. 59/6. Or with Pneumatic Tyres and Ball-Bearing Tangent Spoke Wheels, 89/6. None genuine without the Fairycycle Trade Mark.

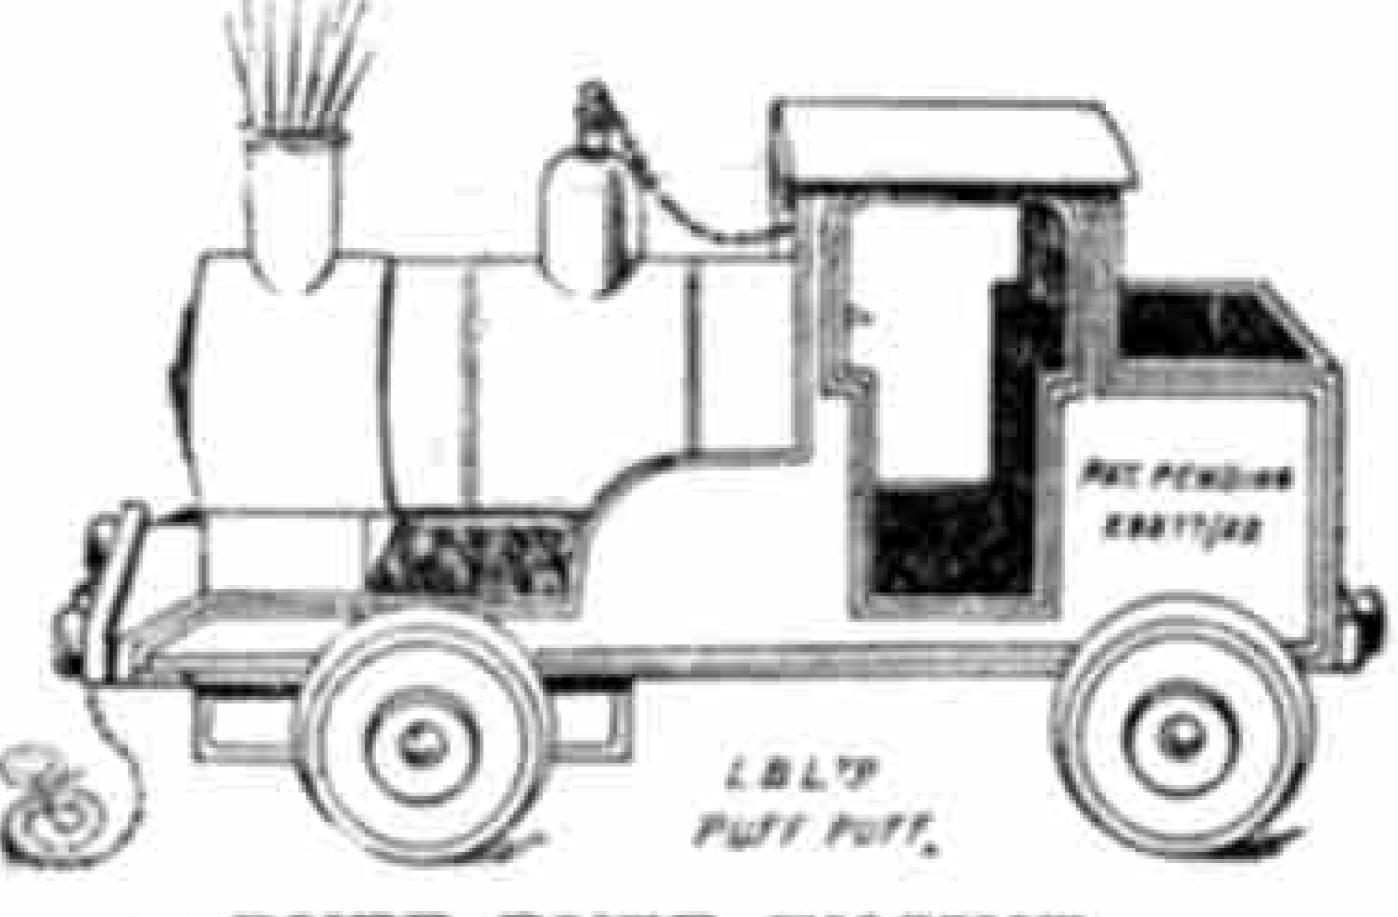

PUFF PUFF ENGINE

Puffs like a real engine when drawn Fitted with a Splendidly painted, lined and varnished. 21½ in. long ... 15/-



LELIO W.CI Mentherni

No. 10 C.T. DOLL'S PRAM

On strap-hung outside C springs. 12 in wheels with rubber tyres. 24 in. by 13 in. body. Beautifully panelled and painted. Apron included. Reversible Hood. Nickelplated Tubular Handle Rods and Fittings ... 59/3



No. 9 PERIOD DOLL'S HOUSE

Four rooms, hall, staircase, fireplaces, rough cast half timbered and red brick exterior, curtains, sun shutters, brass knocker and letter plate. 27 in. wide, 31 in. high, 164 in. deep. 60 /--

Look for the famous Triangle Trade Mark on all good Toys.

LINES BROS. LTD. Showrooms 9, Fore St., LONDON, E.C. 2.

Works: OLD KENT ROAD, LONDON, S.E.

CONJURING for the XMAS PARTY

It's great fun being a conjurer at the X mas Party—
and with Gamages help.
it's quite simple Send
for Conjuring List and
see the host of tricks and
jokes stocked—all easy to
perform—but very mystifying to your audience.

The World's Big Store for Boys for Boys AND BORN

GAMAGES—the Wonder-Store FOR BOYS


Yes, boys! When you've seen this Great Store at Holborn, you'll declare it to be 'iust fine.'-Everything that delights the heart of a boy is here in great variety. Come along and see them all. Bring your friends, too!-They'll be delighted.

CONJURING



CRYSTAL SETS IN PARTS

Wonderful offer of these splendid Crystal Sets in Parts. You can now listenin at a very small cost. The illustration shows the set made up ready for use. All parts are beautifully finished. Size of box 10½ × 8" × 4". Send your order to day. There are only a few left.

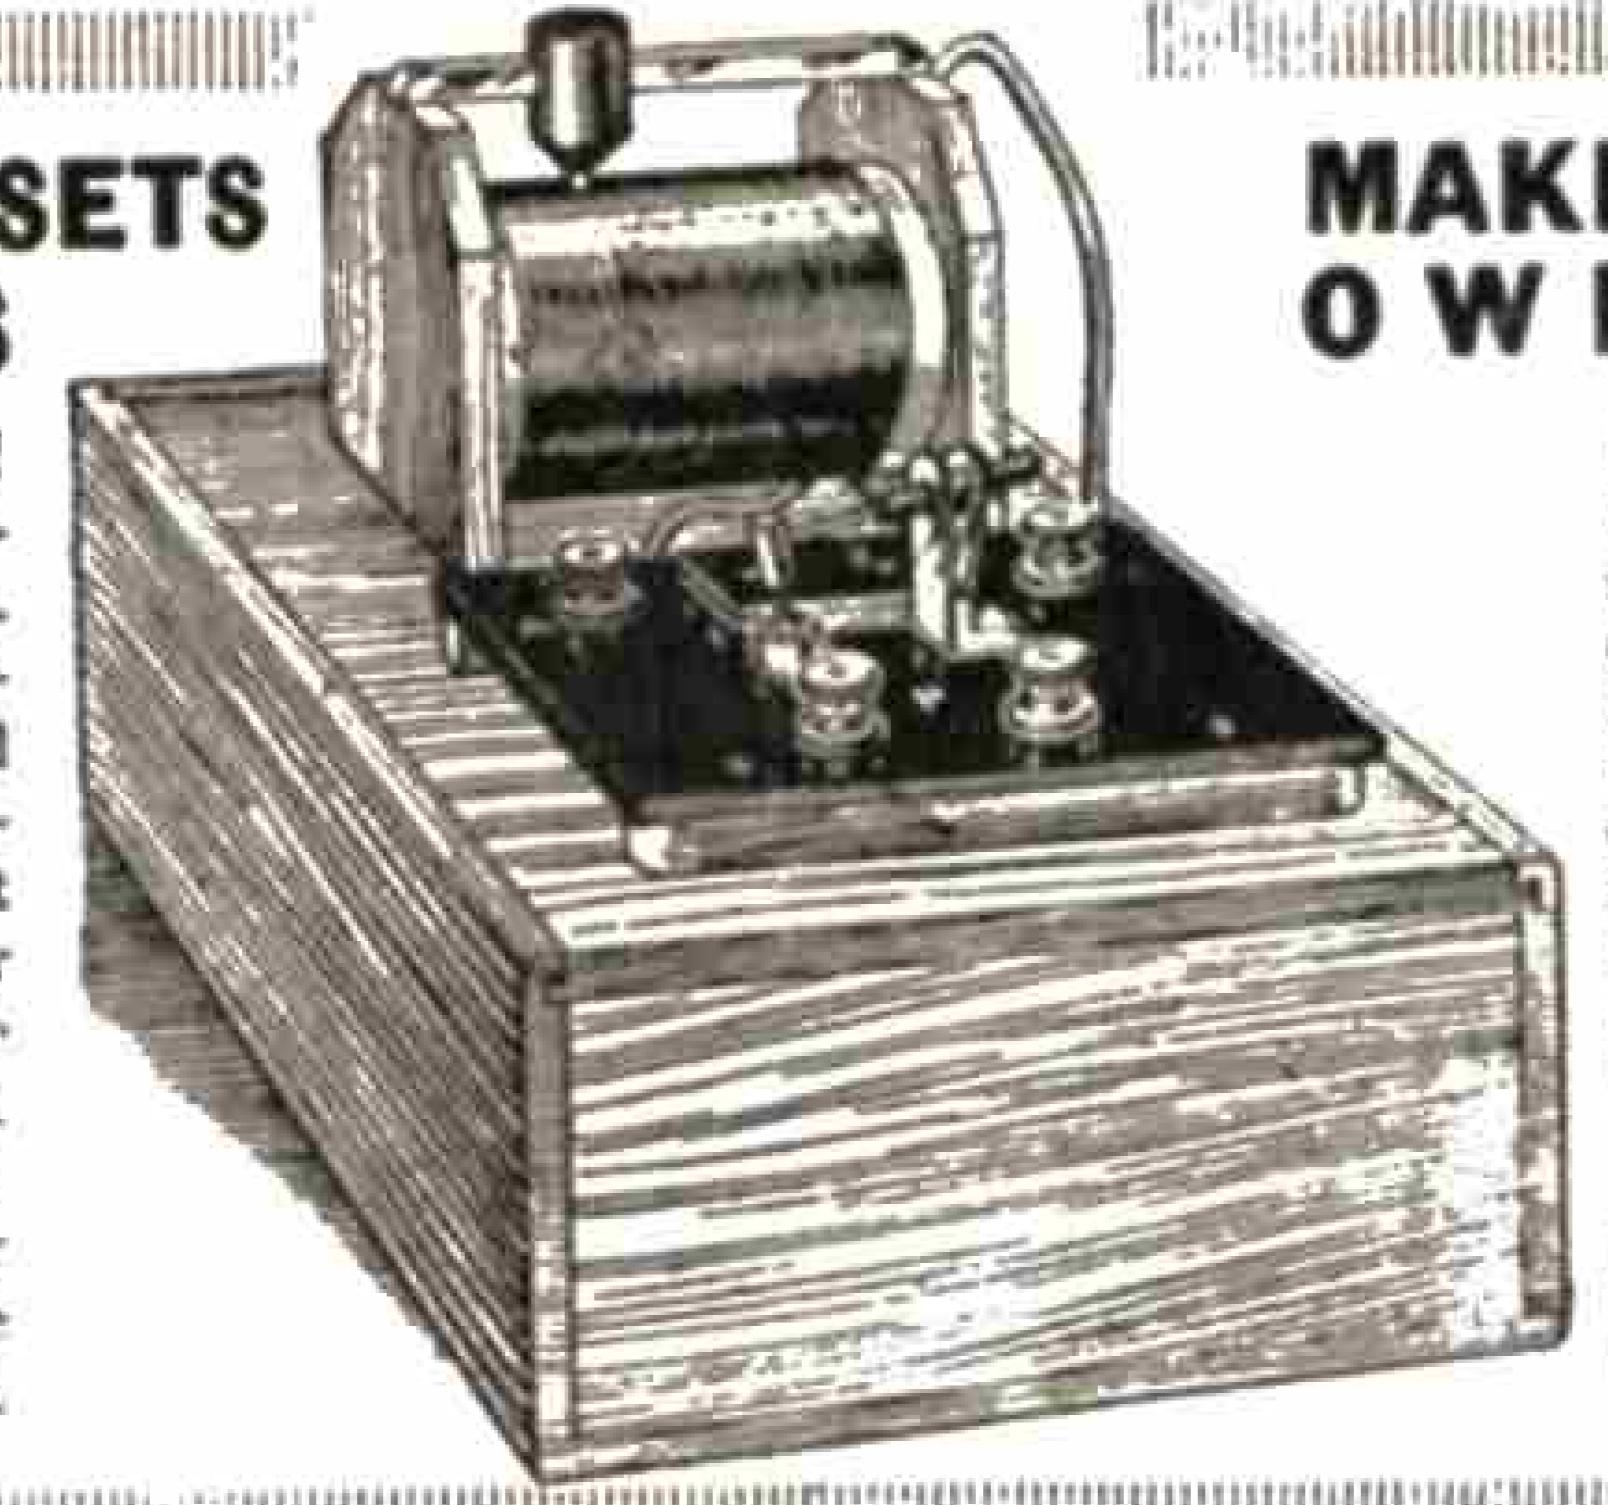

MAKE YOUR OWN SET

tions — quite
simple to carry
out, are given
with every box.
Besides the fun
of "listeningin" you get the
additional pleasure of having
made the set.

Price 17/6
Post 9d. cxtra.

MAKE YOUR OWN EXPERIMENTS



A wonderful assortment of mystifying tricks, complete with book of instructions.


BREET, SHE	PROPERTY.		
Box	A	В	C
	7/9	10/9	15/9
	Post	4d.	
Box	D	E	F
	22/6	35/-	42/-
Lox	G	11	I
	63/	84/	105/-
	-	44	

Boys' Conjuring Cabinets

Just the thing for the boys. A grand assortment of startling tricks complete with instructions. Prices:

3/- and 4/6
Post 3d.


THE 'WINRUBER' GYM SHOE

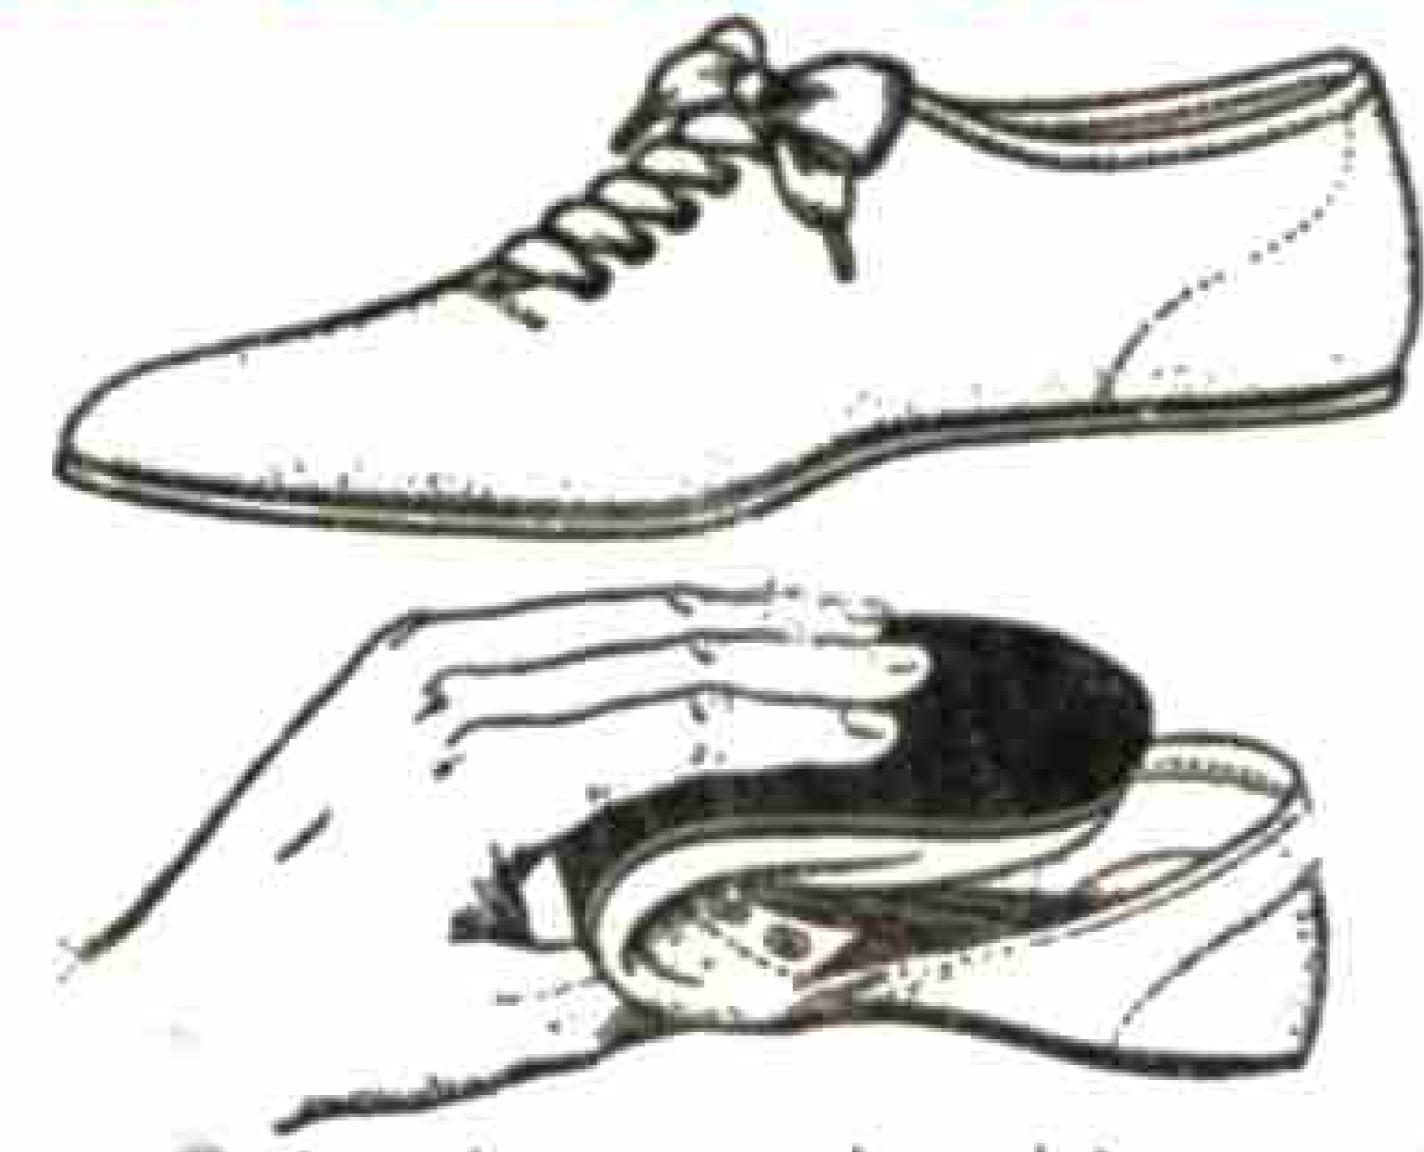

Guaranteed to outlast three pairs of the so-called cheap plims. Leather impregnated with pure rubber, giving the durability of the former with the elasticity of the latter. "Wiaruber" soles cannot come away from the uppers. They are sewn on and are extremely light, delightfully cool to wear and they do not "draw" the feet. Ideal for indoor, outdoor, sports, holiday and general wear. When ordering state colour required, also exact size.

Sizes and Prices

8/11 7/4 5/6

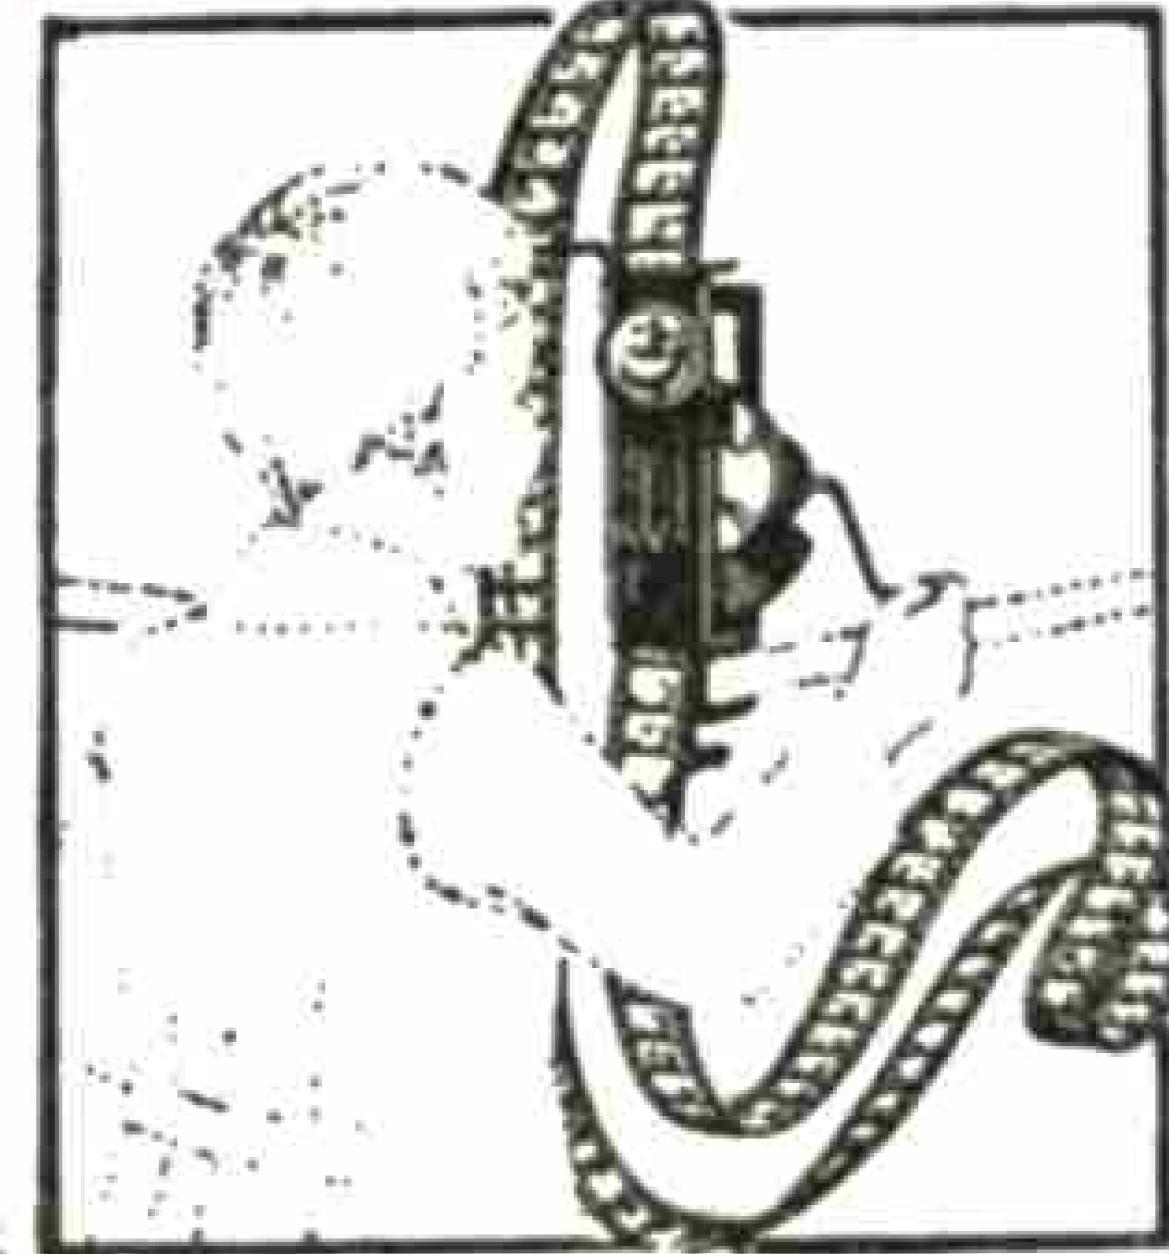

The New 'Cine-Toy'

Gives moving pictures just as a cinematograph. Supplied complete with one transparent film and one paper film. Any films may be used. And you can make your own films; and colour them on the blank paper film supplied. Price complete with instructions:—

Extra paper films 3d, each.

5 different subjects. Ordin
5 different subjects.

STATHAM'S CHEMICAL CABINETS

Chemistry at Home. interesting hobby especially for the dull Winter evenings men come news. Hart his warre THESE TRIBLES IN SCHOOL weite it the Courternier Non- I Brown Packers in strong cardboard how containing 580 Cincipate at Lembe Attal Apparatus. They dismot contain strong AND THE OF CHESTER CHARLES gerous articles, and are always quite sale. Frice, meluding benck of experiments:

14/6


Combined Magic Lantern and Cinematograph

All are complete with oil lamp, film and	Height	Films supplied with each C'matgph	Glass Slides supplied with each C'matgph	Frices with Oil Lamp
lantern slides. Measure- ments include chimney	7° 11° 13°	1 blk. film	1 1" wide 1 1" 3 1" 6 3"	5/6 7/6 12/6

Models fitted with Electric fittings, instead of Oil, 3/6 extra.

Extra Films. 1/- and 2, box.

This Monster Illustra

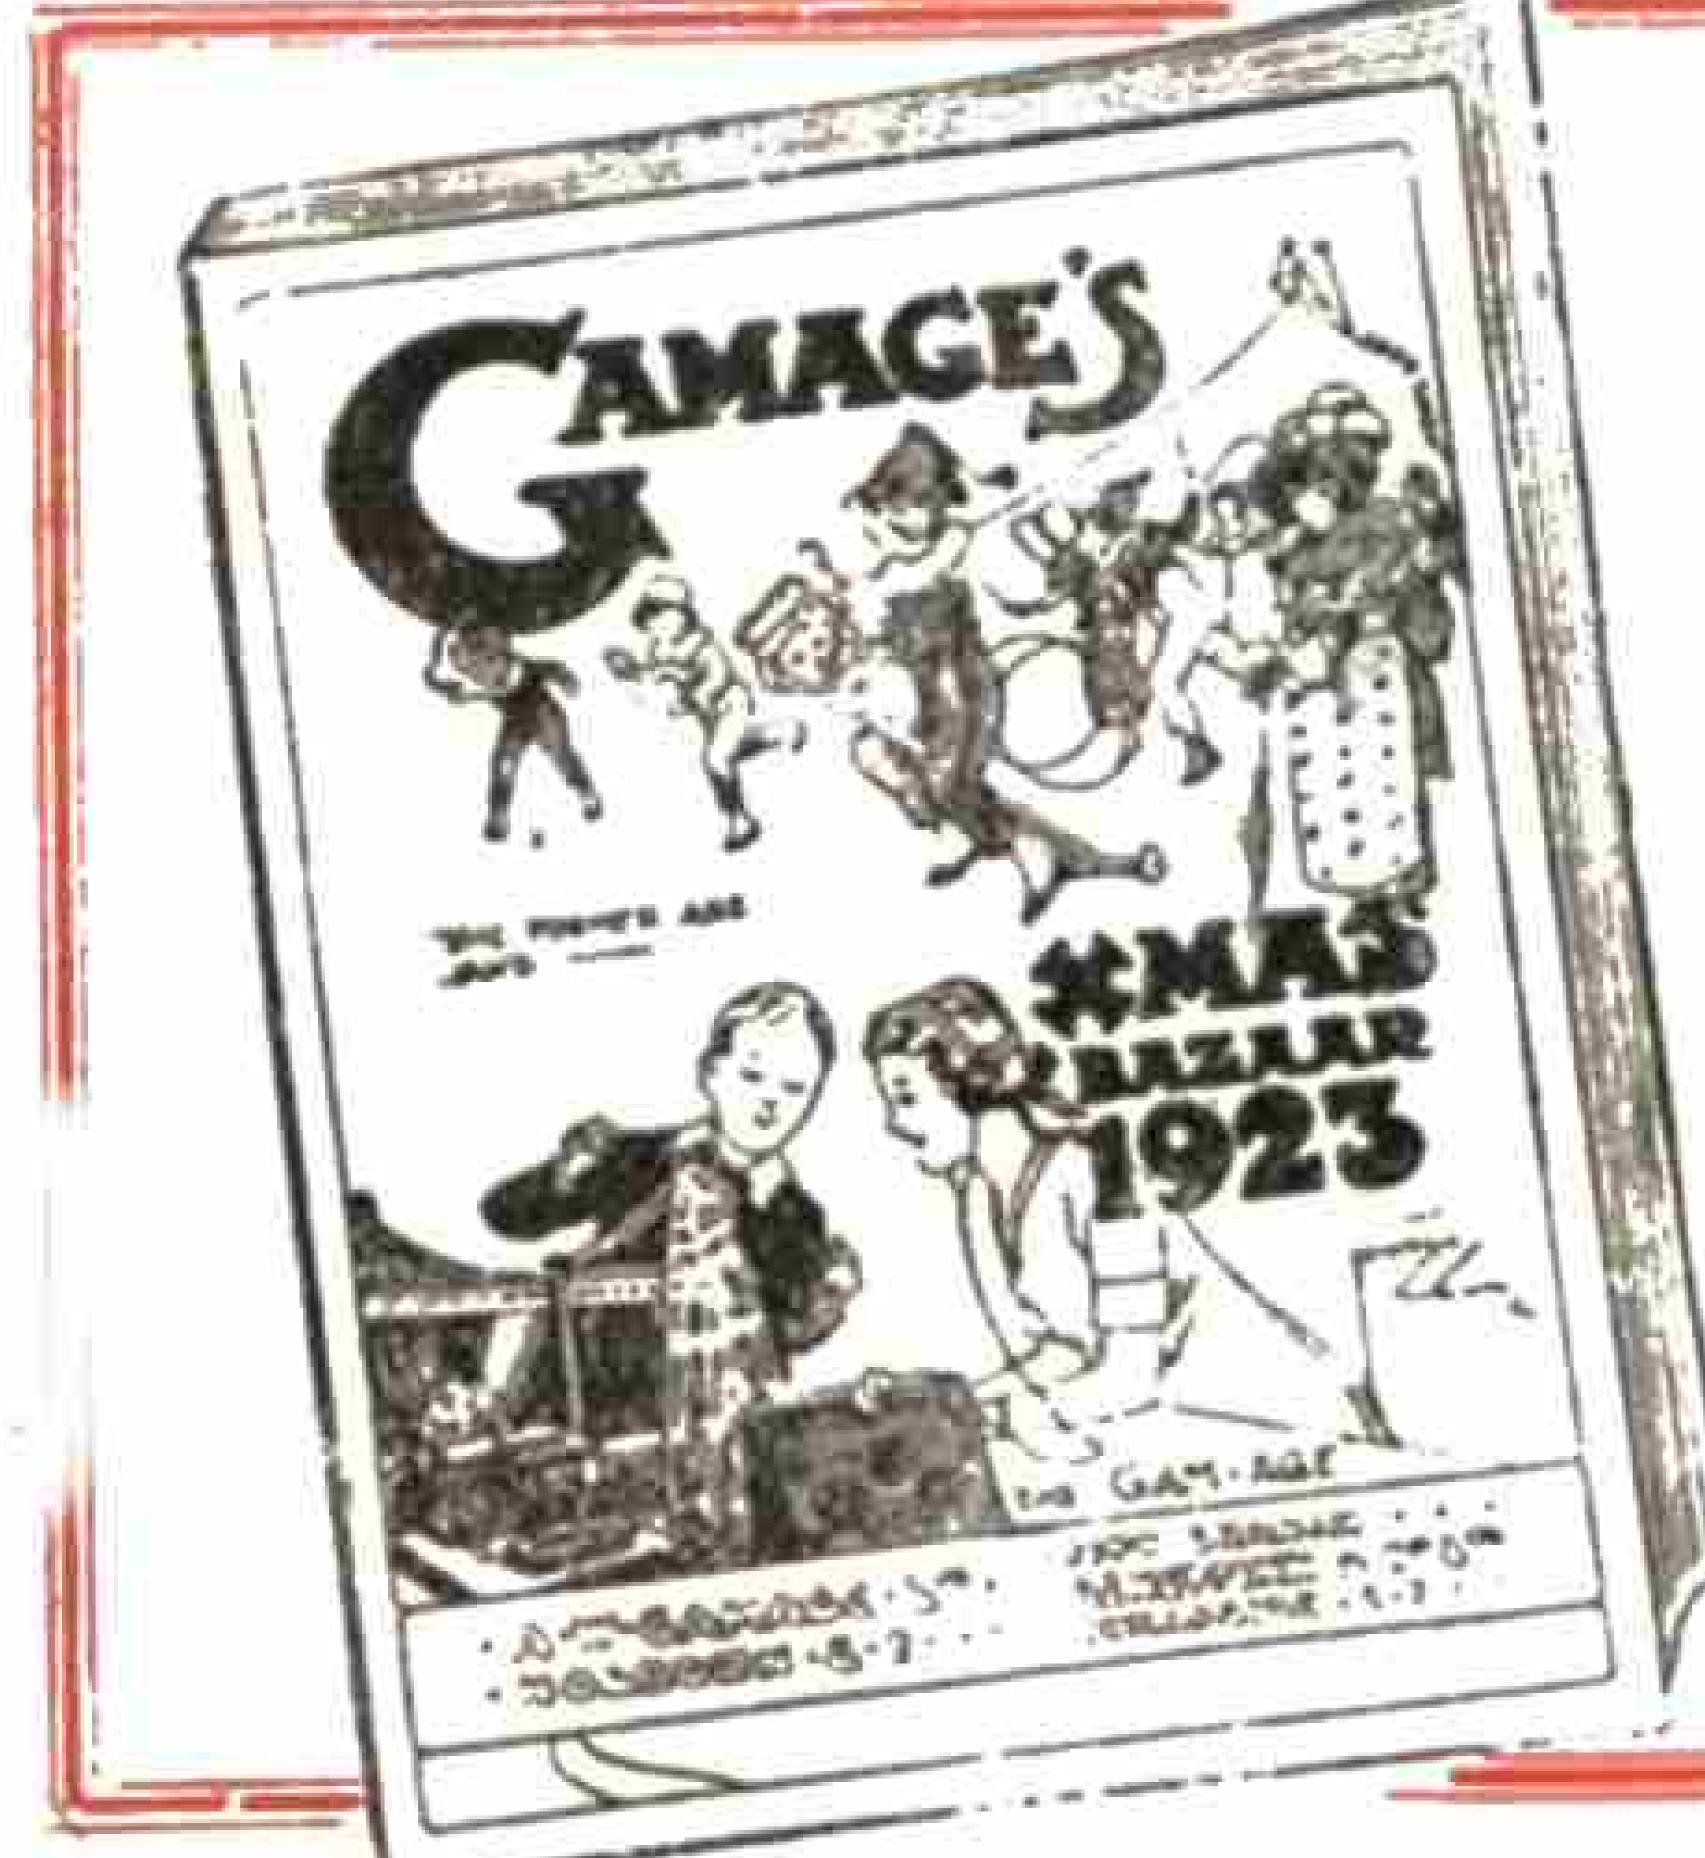

Gamages has, already, got that "Christmassy" look about it. The departments especially the toys, models, games, etc., are even now crammed with such a wonderful variety or good things as to keep boys looking round in wonder for a whole afternoon. The Great Bazaar will be opened very shortly, and to give you an idea of how splendid it will be, and the good things that will be on sale, Gamages have compiled a huge Kmas Catalogue, a copy of which is YOURS FOR THE ASKING. Just drop us a card and we will send you a copy post free. You can then make a list of what you want, and COME ALONG AND SEE THEM.

GAMAGES, HOLBORN, LONDON, E.C. 1.